


Machined seals

Product range

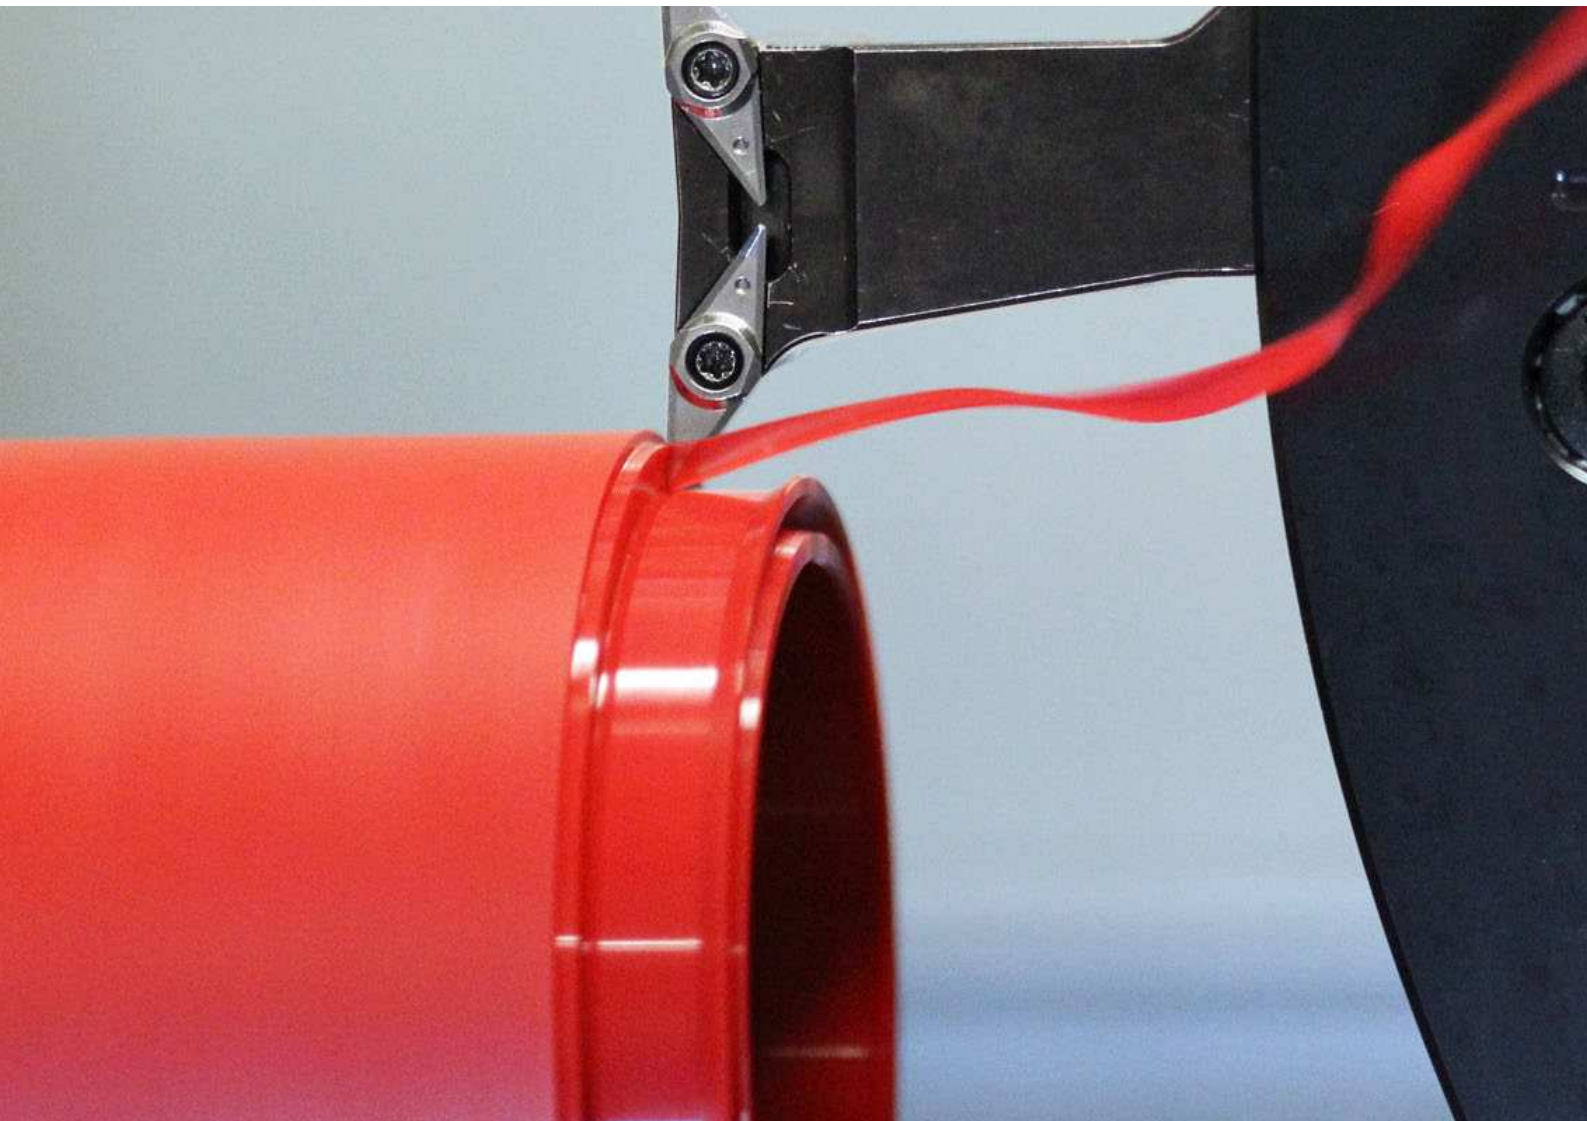

Contents

A Introduction

SKF Industrial Seals portfolio	4
Sealing materials	7
Introduction	7
Thermoplastic elastomers – Polyurethanes	7
Elastomers	8
Thermoplastics	9
Special materials	9
Material properties	10
Criteria for seal and material selection	12
Unit conversions	13

B Product range seals

Piston seals	14
Rod seals	26
Wiper seals	38
Rotary seals	48
Guide rings	58
Back-up rings	62
Static seals	66

C Housing details

Piston seal housing details and recommendations	70
Rod seal housing details and recommendations	72
Wiper housing details and recommendations	76
Rotary seal housing details and recommendations	78
Guide ring housing details and recommendations	82
O-ring housing details and recommendations	83

SKF Industrial Seals portfolio

Introduction

Seals have a crucial impact on system performance. Life and reliability of what is often considered a simple component can make all the difference to your product and operations. Increase productivity and process reliability as well as reduce total cost of ownership with innovative sealing solutions from SKF. We are the world's only bearing company with seal manufacturing capabilities and supply a wide range of sealing solutions for rotating, reciprocating and static applications to the whole industrial market worldwide.

With SKF you get support for all the key aspects of your sealing system.

With our proven capabilities in seal design, materials, testing and manufacturing, we offer extensive support to help engineering teams worldwide make all the right choices during the entire product life cycle.

In our Industrial Seals assortment, we offer a wide range of standard power transmission seals, hydraulic seals as well as fluid handling seals.

Our flexible seal production model combines moulded and machined manufacturing capabilities to accommodate virtually any demand from single seals or prototypes to high volume serial production – from one to a million.

Machined Seals Concept – meeting unique sealing demands, on demand

One important pillar of this manufacturing flexibility is the Machined Seals Concept, which was developed by SKF more than 30 years ago and provides a fast, flexible amendment to the wide assortment of production methods for standard moulded seals. With a unique combination of capabilities, we can deliver polymer seals in a very

short time, in virtually any dimension and any design, for virtually any industrial application.

Machined seals can be invaluable for engineers and maintenance technicians. Getting a customized seal made to order in a day or two can keep a project on track when prototyping new designs. Furthermore, machined seals can minimize downtime and lost production when a critical component fails and the standard replacement seal is not in stock.

The Machined Seals Concept combines several SKF strengths, including extensive application engineering support, a wide selection of seal profiles and materials, and worldwide availability.

Together, these capabilities enable on-demand manufacturing for everything from a single seal to serial production, for fluid power, fluid handling and power transmission applications.

Application engineering support

After receiving the customer's request, our application engineers gain an understanding of the particular application demands and the related challenges for the necessary sealing solution. Together with your experience we can develop a sealing solution by choosing the most appropriate seal profiles and sealing materials.

Profile and material selection

We pre-select the seal profiles from an array of standard seal designs that are pre-programmed in our proprietary machining software, or we can work with you to design a fully custom engineered seals profile. Our engineers will also determine the optimum sealing material. Our world class range of standard and special-grade machinable sealing materials includes many that are compliant with FDA, NSF, EU1935/2004, NORSOK, NACE, and other key industry standards and government regulations.

CNC manufacturing process

Featuring proprietary software and high-precision cutting tools, the SKF SEAL JET manufacturing system uses Computer Numerical Control (CNC) technology with proprietary software and specially developed machining tools to machine polymer seals quickly. The SKF SEAL JET machines are developed and produced by SKF and machine seals from semi-finished tubes of our specially selected polymeric materials.

Rapid delivery worldwide

The Machined Seals Concept and related services are available globally at selected SKF Machined Seals Centres and at selected SKF distribution partners. Strategically positioned throughout the world's major industrial markets, these facilities enable rapid manufacturing and delivery.

All machined seals, whether standard or customized, are manufactured on demand without any additional tooling costs. Production quantities range from a single piece to several thousand pieces. The SKF SEAL JET production system reduces manufacturing and dispatch time to a minimum compared to other production methods for seals.

Promptly manufactured machined seals are available in a wide size range from 1 mm up to around 4 000 mm as one piece. Larger seals – up to 14 000 mm – and even larger – are available using a special welding technique that also allows on-site joining and fitting of seals, which significantly can reduce equipment downtime. These welded seals provide a performance comparable to continuously machined or moulded seals.



SKF SEAL JET NG 060 machine

Scan to view brochures and video



Industrial Shaft Seals



Hydraulic Seals catalogue




Industrial Seals whiteboard movie



Assortment of miniature seals made of different sealing materials



Large diameter machined seal for a hydro power application made of G-ECOPUR

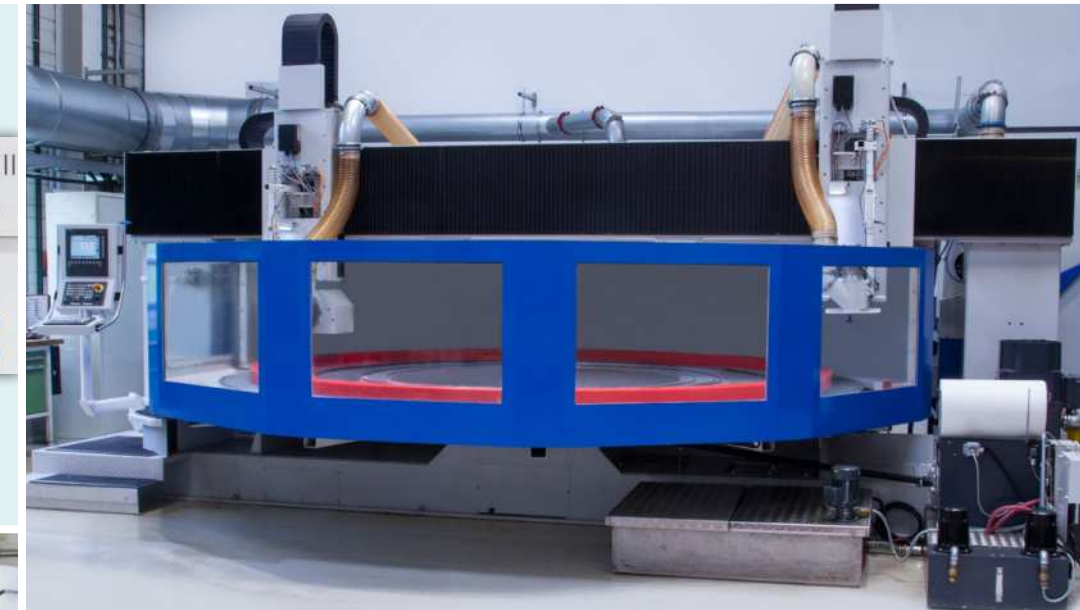

Large diameter horizontal turning lathe with G-ECOPUR semifinished material in front



Sealing materials



Introduction

Increasing performance requirements for sealing applications due to demanding operating conditions raise the importance of carefully selecting the appropriate sealing materials. These conditions can include high speeds, pressures and temperatures, often in combination with poor lubricating fluids. Fluids like HFA and HFB as well as biologically degradable hydraulic fluids (vegetable oils and synthetic esters) present additional challenges for the selection of the right sealing material, as chemical compatibility of sealing material and operating fluid must be ensured.

Different types of polymeric materials are available to meet all demands on the seal assembly in the best possible way. In this brochure, 26 standard materials for machined seals are featured. These materials have been developed by SKF to meet the vast majority of customer requirements. In addition, SKF has a variety of special material grades to meet more specific application demands. Finally, customized material solutions can be co-developed if required.

Thermoplastic elastomers – Polyurethanes

Thermoplastic elastomers are a class of copolymers that combine thermoplastic and elastomeric material properties. For sealing applications, polyurethanes are the most important material class of thermoplastic elastomers. They are processed at SKF as thermoplastic polyurethanes (TPUs) through injection moulding and for larger diameters as cast polyurethanes (CPUs). Polyurethanes provide elastomeric material behaviour in their operating temperature range, which is required to provide sealing functionality. They show excellent mechanical properties such as strength, ultimate elongation and abrasion resistance. Due to their thermoplastic material behaviour, they soften and eventually melt at high temperatures, which limits their upper service temperature.

Elastomers

Elastomers are flexible materials with a generally low modulus that are typically used for sealing and/or damping applications. Due to their chemically cross-linked structure, they can operate at higher temperatures compared to polyurethanes and mostly show a very low compression set. Depending on the applied polymer, they can exhibit excellent chemical resistance. While reinforcing fillers improve their mechanical properties, the performance level does not reach the level of polyurethanes.

Thermoplastics

Thermoplastic materials show rigid behaviour in their operating temperature range. As they melt at temperatures above their service level, they can be processed through injection moulding. The selection of the polymer grade determines the chemical and morphological structure and thus chemical compatibility as well as mechanical properties (ductility, stiffness, strength). Engineering thermoplastics are generally used for back-up rings, guide rings, bushings, scrapers or other elements of a sealing assembly.

Thermoplastic elastomers – Polyurethanes

ECOPUR


ECOPUR is a thermoplastic polyurethane elastomer (TPU) and standard grade of the SKF machined seals range for sealing applications in mineral oil. It features excellent mechanical properties such as abrasion resistance, tear strength and low compression set. Typical products made of ECOPUR are U-cup seals, lip seals, wipers or chevron packings, but also customized shapes for dampers or machine parts are possible.

ECOPUR LD

ECOPUR LD is a cast polyurethane elastomer (CPU) that features similar properties to ECOPUR. It covers the dimensional range from diameters of 600 mm to 1200 mm.

H-ECOPUR

H-ECOPUR is a hydrolysis-resistant TPU. It combines the engineering properties of ECOPUR with excellent compatibility to many operating media at high operating temperatures. These include mineral oils, HFA and HFB fluids or biodegradable hydraulic fluids. H-ECOPUR is approved for various food regulations and is suitable for

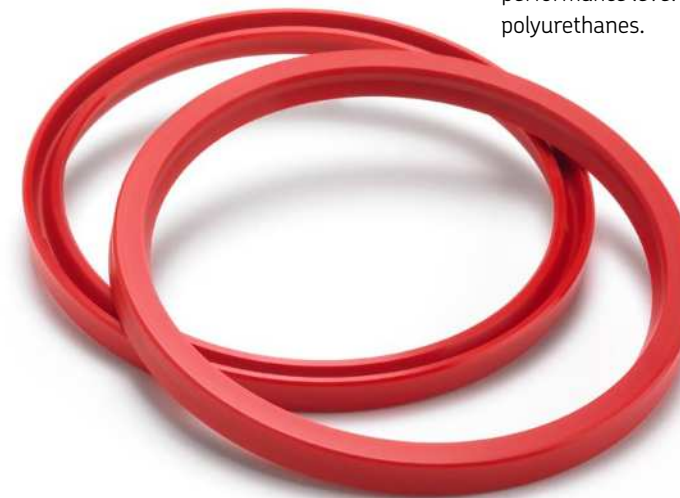

many sterilization processes in the food and beverage industry, but not for steam sterilization. Compared to ECOPUR, it features a slightly higher minimum service temperature.

G-ECOPUR

G-ECOPUR is a CPU that features similar properties to H-ECOPUR. Its standard range features diameters from 540 mm up to 4 000 mm. Seal diameters exceeding 4 000 mm can be realized with a specially developed welding procedure.

S-ECOPUR

S-ECOPUR is a TPU which is modified with solid lubricants. It combines the chemical compatibility of H-ECOPUR with excellent friction and wear behaviour, particularly in unlubricated operating conditions. This material is therefore the first choice for applications in water hydraulics or in dry-running pneumatics.

T-ECOPUR

T-ECOPUR is a TPU with an extended minimum service temperature of down to -50 °C. It features comparable properties than ECOPUR. Therefore, it is suitable for severe climatic conditions and processes for frozen goods.

X-ECOPUR

X-ECOPUR is a TPU based on ECOPUR with an increased hardness of 57 Shore D. It features excellent wear and pressure resistance, which makes it the first choice for heavy duty applications. Due to its extrusion resistance, it can compensate larger clearances compared to standard TPUs or PTFEs.

G-ECOPUR 54D

G-ECOPUR 54D is a CPU based on G-ECOPUR with an increased hardness of 54 Shore D. It features similar properties to G-ECOPUR resp. H-ECOPUR with increased pressure resistance due to the increased hardness.

X-ECOPUR-H

X-ECOPUR-H is a TPU based on H-ECOPUR with an increased hardness of 60 Shore D. It combines excellent chemical compatibility known from H-ECOPUR with high pressure resistance, which makes it suitable for heavy duty operating conditions combining high operating temperatures in critical media at high mechanical load levels.



X-ECOPUR-S

X-ECOPUR-S is a TPU based on S-ECOPUR with an increased hardness of 57 Shore D. This enables a better extrusion resistance and thus allows higher operating pressures. It is available for tube sizes up to 340 mm. For larger dimensions, refer to the special grade G-ECOPUR-54D-SL.

Elastomers

SKF Ecorubber-1

SKF Ecorubber-1 is an elastomer based on acrylonitrile-butadiene rubber (NBR) and is used for U-cup seals, chevron packings, special seals and various components. This material has good resistance to mineral oils and greases and HFA, HFB and HFC pressure fluids. However, the material is not resistant to glycol-based brake fluids, HFD fluids, aromatic fluids (such as benzene), esters, ketones and amines or concentrated acids and bases.

SKF Ecorubber-H

SKF Ecorubber-H is a hydrogenated acrylonitrile-butadiene rubber. Compared to SKF Ecorubber-1, its polymer backbone is saturated, which allows increased operating temperatures (in general 150 °C, for short times up to 170 °C), improves weathering and chemical resistance and thus enables applications with aliphatic hydrocarbons like propane, butane or sulfonated crude oil. Furthermore, it can be used in many diluted acids, bases and salt solutions even at elevated temperatures and in glycol-water mixtures. SKF Ecorubber-H is not compatible with fuels that have a high content of aromatic hydrocarbons (premium-blend petrol), gasolines (petrol/

alcohol-blends), ketones, esters, ethers and chlorinated hydrocarbons like trichloro-ethylene and tetrachloro-ethylene.

SKF Ecorubber-2

SKF Ecorubber-2 is an elastomer based on fluoro rubber (FKM) that can be used for U-rings, lip seals, chevron packings, wipers and special seals. Its outstanding properties are high resistance to heat, weathering, ozone and many other chemicals. SKF Ecorubber-2 is compatible with mineral oils and greases containing sulphur, HFD pressure fluids (some phosphate esters and chlorinated hydrocarbons) and crude oil. SKF Ecorubber-2 is not resistant to anhydrous ammonia, amines, ketones, esters, hot steam and low molecular weight organic acids and shows medium resistance to sour gas.

SKF Ecorubber-3

SKF Ecorubber-3 is an elastomer based on ethylene-propylene rubber (EPDM) and can be used for U-cup seals, lip seals and chevron packings. SKF Ecorubber-3 has outstanding resistance to hot water, steam, washing agents and polar organic solvents. SKF Ecorubber-3 is not resistant to mineral oil and other unpolar media. Its resistance to weathering, ozone and ageing is good. When used in glycol-based brake fluids, governmental regulations have to be considered.

SKF Ecoflas

SKF Ecoflas is a unique fluoro elastomer based on an alternating copolymer of tetrafluoro-ethylene and propylene (TFE/P). Compared to fluoro rubber, it shows slightly higher tensile strength and a quite similar heat resistance. The resistance of SKF Ecoflas against mineral oils is on a lower level

compared to SKF Ecorubber-1, SKF Ecorubber-2 and SKF Ecorubber-H. Especially in mineral oils with an increased content of aromatic hydrocarbons, swelling has to be expected. SKF Ecoflas has outstanding resistance to hot water and hot steam up to 230 °C as well as to sour gas and amines, brake fluids (based on glycol, mineral oil or silicone oil) and fire-resistant hydraulic fluids. In contrast to SKF Ecorubber-2, SKF Ecoflas has a good resistance to radiation.

SKF Ecosil

SKF Ecosil is a silicone rubber (MVQ) and can be used for O-rings, gaskets and special seals. Due to its mechanical properties, it is mostly used for static applications. SKF Ecosil is highly resistant to weathering, ozone and ageing and it is compatible with mineral oil, however resistance to mineral oils with increased content of aromatic or naphthenic hydrocarbons is limited. Poor resistance has to be expected to fuels and acids as well as steam.

Thermoplastics

SKF Ecoflon 1

SKF Ecoflon 1 is a thermoplastic material based on polytetrafluoroethylene (PTFE-virgin) that is used for back-up rings, chevron packings, O-rings, rotary seals and gaskets. SKF Ecoflon 1 has outstanding chemical resistance and will only be attacked by molten alkali metals and elementary fluorine at high temperatures. Using PTFE seals, it should be noted that creeping occurs at relatively low loads (pressure). SKF Ecoflon 1 is suitable for the food industry.

SKF Ecoflon 2

SKF Ecoflon 2 (PTFE + 15% glass fibre + 5% MoS₂) has improved compression strength as well as improved sliding properties compared to SKF Ecoflon 1. The chemical resistance is similar to SKF Ecoflon 1.

SKF Ecoflon 3

SKF Ecoflon 3 (PTFE + 40% bronze) features improved compression strength, sliding properties and an improved thermal conductivity compared to SKF Ecoflon 1.

SKF Ecoflon 4

SKF Ecoflon 4 (PTFE + 25% carbon) has improved mechanical strength, stiffness and hardness as well as improved sliding properties compared to SKF Ecoflon 1.

SKF Ecoflon 5

SKF Ecoflon 5 (PTFE modified) has improved wear and abrasion resistance compared to SKF Ecoflon 1. The material is suitable for the food and beverage industry.

SKF Ecotal

SKF Ecotal is a semi-crystalline polyacetal copolymer (POM-C) which is used for anti-extrusion rings, guide rings, bushings, scrapers and for precision-machined parts with tight tolerances. SKF Ecotal has good mechanical properties, low water absorption and good chemical resistance. SKF Ecotal can be used in mineral oils and in water-based fire-resistant hydraulic fluids (HFA, HFB and HFC fluids). Concentrated acids and bases will attack and destroy it.

SKF Ecomid

SKF Ecomid is a cast polyamide (PA) with good sliding properties and is used for back-up rings, guide rings and bearing components instead of SKF Ecotal for diameters above 260 mm. SKF Ecomid can be used in mineral oils and some water-based fire-resistant hydraulic fluids. When designing parts of SKF Ecomid for an application in water or water-based fluids, the swelling of the material (SKF Ecomid absorbs water up to eight weight percent) must be taken into consideration.

SKF Ecopaek

SKF Ecopaek (PEEK) is a high performance, premium thermoplastic grade. Its maximum service temperature exceeds most other technical plastics by far, while offering excellent dimensional stability, creep and relaxation resistance combined with high tensile strength and good sliding and friction behaviour. It is mainly used for sealing elements where standard materials cannot survive due to limited temperature resistance or too low mechanical strength.

SKF Ecowear 1000

SKF Ecowear 1000 is a semi-crystalline thermoplastic material based on polyethylene (UHMW-PE) with a molecular weight of about 4 500 000 g/mol. SKF Ecowear 1000 has a very low coefficient of friction, an excellent wear resistance and impact strength (also at low temperatures down to -200 °C). Compared to the SKF Ecoflon range, it has a very high creep resistance and is almost water repellent without any swelling. SKF Ecowear 1000 is recommended where outstanding sliding properties are required and in case of wear- and dry-running due to bad lubrication and aqueous media.

Thermosets

SKF Ecotex

SKF Ecotex is a compound based on a thermoset polyester resin (light orange) and reinforced with fabric inlays. Due to the addition of graphite, the material shows very good characteristics in respect to the tribological requirements in gliding systems. SKF Ecotex shows high compressive strength and outstanding friction reduction and wear resistance properties. Therefore, it is very well-suited for guide rings and bushings. Thanks to the very low tendency of absorbing moisture, SKF Ecotex is particularly suitable for use in water and media containing water (swelling in water < 0,1%).

Special materials

The materials listed in this publication are the standard materials for manufacturing machined seals and can be selected in our SKF SEAL JET NG machining software. There are many more grades as derivatives of the standard grades available on request. These materials are specially developed to meet industry related requirements e.g. for the food and beverage or oil and gas industries. Please contact SKF for further information.

Material properties

Properties	Standard	Unit	Polyurethanes											Elastomers							Thermoplastics										Thermoset
			ECOPUR	ECOPUR LD	G-ECOPUR cast – hydrolysis resistant	H-ECOPUR hydrolysis resistant	S-ECOPUR solid lubricants	T-ECOPUR low temperature grade	X-ECOPUR hard grade	G-ECOPUR 54D cast – hard grade	X-ECOPUR H hard grade hydrolysis resistant	X-ECOPUR S hard grade solid lubricants	SKF Ecorubber-1	SKF Ecorubber-H	SKF Ecorubber-2	SKF Ecorubber-3	SKF Ecoflas	SKF Ecosil	SKF Ecoflon 1	SKF Ecoflon 2 +15% GF + 5% MoS2	SKF Ecoflon 3 +40% bronze	SKF Ecoflon 4 +25% Carbon	SKF Ecoflon 5 modified	SKF Ecotal	SKF Ecomid	SKF Ecopaek	SKF Ecowear 1000	SKF Ecotex			
			TPU	CPU	CPU	TPU	TPU	TPU	TPU	TPU	TPU	TPU	TPU	TPU	TPU	TPU	TPU	TPU	PTFE virgin	PTFE	PTFE	PTFE	PTFE	POM	PA	PEEK	UHMWPE	–			
Standard colour			Green	Green	Red	Red	Dark grey	Blue	Dark green	Red	Dark red	Dark grey							White	Grey	Bronze	Black	White	Black	Black	Cream	White	Light orange			
Hardness	DIN ISO 7619	Shore A	95 ±2 ¹⁾	95 ±2 ¹⁾	95 ±2 ¹⁾	95 ±2 ¹⁾	95 ±2 ¹⁾	95 ±2 ¹⁾	97 ±1 ¹⁾	97 ±1 ¹⁾	97 ±1 ¹⁾	97 ±1 ¹⁾																			
Hardness	DIN ISO 7619	Shore D	48 ±3 ¹⁾	48 ±3 ¹⁾	47 ±3 ¹⁾	48 ±3 ¹⁾	48 ±3 ¹⁾	48 ±3 ¹⁾	57 ±3 ¹⁾	54 ±3 ¹⁾	60 ±3 ¹⁾	58 ±3 ¹⁾																			
Density	DIN EN ISO 1183	g/cm ³	1,20	1,19	1,17	1,20	1,23	1,17	1,21	1,19	1,22	1,23																			
100% modulus	DIN 53504	MPa	≥12	≥10	≥11	≥13	≥17	≥12	≥16	≥15	≥22	≥22																			
Tensile strength/yield stress	DIN 53504	MPa	≥50	≥45	≥45	≥50	≥45	≥50	≥45	≥45	≥45	≥38																			
Elongation at break	DIN 53504	%	≥430	≥380	≥330	≥330	≥380	≥450	≥400	≥330	≥350	≥300																			
Modulus of elasticity – tensile test	ISO 527	MPa	–	–	–	–	–	–	–	–	–	–																			
Compression set																															
70 °C/24h 20% compression	DIN ISO 815	%	≤27	≤30	≤30	≤27	≤30	≤27	≤30	≤30	≤30	≤33																			
100 °C/24h 20% compression	DIN ISO 815	%	≤33	≤40	≤40	≤33	≤35	≤33 ³⁾	≤35	≤40	≤35	≤39																			
100 °C/24h	DIN ISO 815	%	–	–	–	–	–	–	–	–	–	–																			
175 °C/24h	DIN ISO 815	%	–	–	–	–	–	–	–	–	–	–																			
Tear strength	DIN ISO 34-1	N/mm	100	–	–	100	120	80	130	–	160	160																			
Abrasion	DIN ISO 4649	mm ³	18	22	18	17	21	15	18	18	20	29																			
Minimum service temperature ⁷⁾ Brittleness temperature ⁷⁾		°C	–30	–35	–30	–20	–20	–50	–30	–30	–20	–20																			
		°C	<–60	<–60	<–60	<–60	<–60	<–60	<–60	<–60	<–60	<–60																			
Maximum service temperature ⁷⁾ Short term ⁷⁾		°C	+110	+110	+110	+110	+110	+100	+115	+110	+115	+115																			
		°C	+125	+125	+125	+125	+125	+120	+130	+125	+130	+130																			

¹⁾ Testing time 3 s only valid for polyurethanes

²⁾ DIN EN ISO 868

³⁾ ≤ 45 % according to DIN ISO 815 at –40 °C/24h 20% compression

⁴⁾ ASTM D4894

⁵⁾ ASTM 4745

⁶⁾ ISO 527-1/2

⁷⁾ Minimum and maximum service temperatures are general material properties only. Deviations due to application parameters and operating media need to be considered. Data concerning special materials based on the here mentioned standard grades are available on request.

Criteria for seal and material selection

The selection of the right seal profile and material for a given application requires consideration of many factors and strongly depends on the operating conditions of the application.

Furthermore, a sealing system may contain many components.

This catalogue supports the selection of the right machined seals including the appropriate sealing material for typical rotary, linear and static applications.

Generally spoken, the following application considerations are required to properly select seal profiles and sealing materials:

- Type of movement; linear, rotating, swivelling, spiral movement or static application
- Type of application
- Temperature range (fluid, housing, environment); all in operation and at rest
- Speed; either the stroking speed for linear applications or the circumferential and rotational speed for rotating or swivelling applications
- Pressure range of the fluid to be sealed; that might be the absolute pressure as well as pressure spikes or pressure differentials that the seals need to cope with
- Fluid media; the type and viscosity of the fluid used in the system
- Hardware dimensions; rod and bore resp. shaft and housing diameters, seal groove dimensions and gaps (if already specified), installation restrictions, limited space, etc.
- Surface specifications; material, hardness surface finish and tolerances of all surfaces that are in contact with the seals
- Environmental aspects like contaminants, external temperature etc.

Please also find more details in the respective introductory section to the different seal categories. There you also will find selection guides based on the above mentioned criteria.

Type of movement table head	Recommended usage (blue symbol)	Optional usage depending on the application parameters (grey symbol)
Linear		
Rotating		
Oscillating or swivelling		
Spiral		
Static		

In case you need to use a seal profile with a listed grey symbol, please contact SKF to clarify the application limitations.

General remarks for technical data

The stated operating parameters in the following tables represent general conditions. It is recommended NOT to use all maximum values simultaneously. The specified pressure limits apply for use in mineral oil with a maximum temperature of 60 °C and a maximum metal extrusion gap of 0,25 mm unless stated differently for selected seal profiles. The speed limits apply for adequate lubrication and running surface finishing as recommended. SKF also recommends testing material/media compatibility and sealing function for targeted performance under real working conditions. Depending on application details, higher pressures and speed limits can be attained in most cases. If any of the indicated limits do not meet specific requirements, please contact SKF.

Application symbols

The application symbols listed with each and every seals profile in the following tables show the usability of the specific seals profile for the main types of movement – linear, rotating, oscillating or swivelling, spiral or static.

The symbols are shown in two different colours – blue for recommended use and grey for optional use. Please refer to the table for more details. If a specific symbol is NOT listed at a selected seals profile, we strongly recommend not using it for such an application.

Scan to view video, about the machining process via a QR code



Scan to explore our Industrial Seals Expert Knowledge Hub



Unit conversions

Quantity	Unit	Conversion			
Length	inch	1 mm	0.03937 in.	1 in.	25,40 mm
	foot	1 m	3.281 ft.	1 ft.	0,3048 m
	yard	1 m	1.094 yd.	1 yd.	0,9144 m
	mile	1 km	0.6214 mi.	1 mi.	1,609 km
Speed, velocity	foot per second	1 m/s	3.28 ft/s	1 ft/s	0,30480 m/s
	foot per minute	1 m/s	196.8504 ft/min	1 ft/min	0,00508 m/s
	mile per hour	1 km/h	0.6214 mph	1 mph	1,609 km/h
Force	pound-force	1 N	0.225 lbf.	1 lbf.	4,4482 N
Pressure, stress	pounds per square inch	1 MPa	145 psi	1 psi	6,8948 10 ³ Pa
		1 N/mm ²	145 psi		
		1 bar	14.5 psi	1 psi	0,068948 bar
Temperature	degree	Celsius	$t_C = 0.555 (t_F - 32)$	Fahrenheit	$t_F = 1,8 t_C + 32$



Piston seals

Introduction


Piston seals provide the sealing function in sliding motion between the piston and the bore of a hydraulic or pneumatic cylinder. These seals need to cope with the differential pressures acting on the piston while extending or retracting the piston rod. These differential pressures can be more than 400 bar e.g. for heavy duty applications.

The pressure acting on the piston seal increases the contact forces and as a result of this also the friction between the piston seal and the cylinder surface. Therefore the dynamic sealing surface is critical to the sealing performance and significantly affects the seal's lifetime.

Selecting profiles and materials for a piston sealing system is a complex task, considering all possible cylinder designs and application criteria. SKF supplies standard piston seals in many different profiles and in a wide range of materials, series and sizes, which make them appropriate for a wide variety of operating conditions and applications.

On the following pages you will find all the available piston seal designs that are available as machined versions utilizing the SKF SEALJET system.

Piston seals are typically classified into single-acting (pressure acting on one side only) and double-acting (pressure acting on both sides) seals. Please see more details in the piston seal selection guide on → [page 16](#).

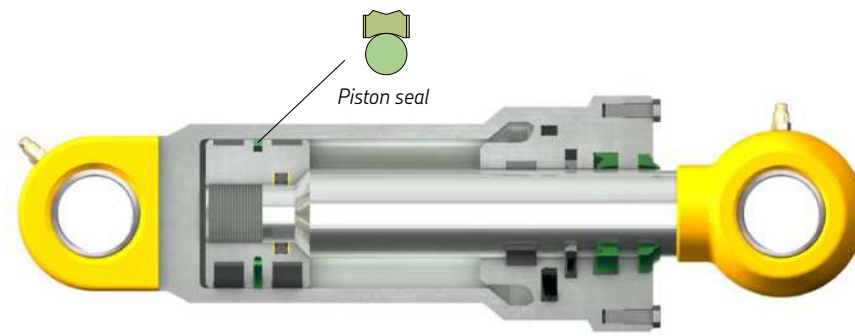

Double-acting piston seal K08-P, pressurized from the system pressure in a hydraulic cylinder.



Single-acting hydraulic seal K01-PE made of H-ECOPUR

Double-acting hydraulic piston seal K08-P made of T-ECOPUR for a deep temperature application






Piston seals

■ Polyurethanes
■ Rubber
■ Thermoplastics

Piston seal selection guide





Unloaded lip seal designs

Lip seals without compact compression to minimize friction. Especially in the low pressure ranges the contact force is increased by the system pressure when it is needed. Typically for applications with frequent movement; focus on low friction and leak tightness.

Standard use	Symmetric design	Back-up designs	Special design variations
<p>when usage as piston or rod seal is required</p> <p>for high pressures and large extrusion gaps</p>	<p>when usage as piston or rod seal is required</p>	<p>for high pressures and large extrusion gaps</p>	<p>Pneumatics Retainer ring Single-acting</p>
 K01-P K01-R	 K06-P K06-R	 K02-P K02-R K02-PD K02-RD	 K05-P K05-R K01-PE K01-RE
			<p>Chevron packing with flexible lips PTFE-design Single lip</p>  K32-P K19-F K19-FX K16-A K16-B




Loaded lip seal designs

Lip seals with a softer energizer in between (compact compressed) are typical for applications with increased sideloads and/or low temperatures; focus on leak tightness. Seals made of PTFE need energizer elements for operation.

 K03-P K03-F	 K07-P K07-F	 K04-P K04-PD	<p>Aggressive lip PTFE-design</p>  K21-P K03-S K03-SX
--	--	--	--






Compact seal designs

Traditional compact seal design typically used in hydraulic cylinders; simple design also often used as static seals; dynamic seals use slide elements for improved frictional behaviour.

<p>TPU design</p>  K35-P	<p>Rubber design</p>  K20-R K23-N	<p>Chevron packings Seals with integrated guide rings</p>  K1012-T K09-H K1315-T K17-P
--	---	---

Activated slide ring designs

Mainly used in dynamic applications, allowing very good sliding properties and low break-away forces.

Single-acting		Double-acting		
Standard	Heavy duty	Standard	Heavy duty	TPU-design
				
K08-E	K08-ES	K08-D	K08-DS	K08-P

Remark: Use X-ECOPUR as slide ring material to improve static sealing behavior

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material	
		min.	max.				
		°C		m/s	bar	-	
   	Hydraulic, single-acting Asymmetric piston seal for standard applications. Very good sealing effect over a wide range. Prevents extensive drag pressure. Back-to-back arrangement with slide ring in between for double-acting pistons. Design optimized for ECOPUR materials.	-30	+110	0,5	400	ECOPUR	
		-35	+110	0,5	400	ECOPUR LD	
		-30	+110	0,5	400	G-ECOPUR	
		-20	+110	0,5	400	H-ECOPUR	
		-20	+110	0,5	400	S-ECOPUR	
		-50	+100	0,5	400	T-ECOPUR	
  	Hydraulic, single-acting Asymmetric piston seal with increased contact force for single-acting pistons. Design optimized for ECOPUR materials.	-30	+110	0,5	400	ECOPUR	
		-35	+110	0,5	400	ECOPUR LD	
		-30	+110	0,5	400	G-ECOPUR	
		-20	+110	0,5	400	H-ECOPUR	
		-20	+110	0,5	400	S-ECOPUR	
		-50	+100	0,5	400	T-ECOPUR	
 	Hydraulic, single-acting As profile K01-P, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,5	160	SKF Ecorubber-1	
		-25	+150	0,5	160	SKF Ecorubber-H	
		-20	+200	0,5	160	SKF Ecorubber-2	
		-50	+150	0,5	160	SKF Ecorubber-3 ²⁾	
		-10	+200	0,5	160	SKF Ecoflas	
		-60	+200	-	-	SKF Ecosil ³⁾	
  	Hydraulic, single-acting Asymmetric piston seal with increased contact force for single-acting pistons. Design optimized for SKF Ecorubber materials.	-30	+100	0,5	160	SKF Ecorubber-1	
		-25	+150	0,5	160	SKF Ecorubber-H	
		-20	+200	0,5	160	SKF Ecorubber-2	
		-50	+150	0,5	160	SKF Ecorubber-3 ²⁾	
		-10	+200	0,5	160	SKF Ecoflas	
		-60	+200	-	-	SKF Ecosil ³⁾	
 	Hydraulic, single-acting Asymmetric piston seal for standard applications based on the K01-P design with an active rectangular back-up ring for larger extrusion gaps or higher pressure ranges.	-30	+100	0,5	700	Seal ECOPUR	Back-up ring SKF Ecotal ¹⁾
		-35	+110	0,5	700	ECOPUR LD	SKF Ecomid
		-30	+110	0,5	700	G-ECOPUR	SKF Ecomid
		-20	+100	0,5	700	H-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	700	S-ECOPUR	SKF Ecotal ¹⁾
		-40	+100	0,5	700	T-ECOPUR	SKF Ecotal ¹⁾
 	Hydraulic, single-acting Asymmetric piston seal for standard applications based on the K01-P design with an active tapered back-up ring for larger extrusion gaps or higher pressure ranges.	-30	+100	0,5	700	Seal ECOPUR	Back-up ring SKF Ecotal ¹⁾
		-35	+110	0,5	700	ECOPUR LD	SKF Ecomid
		-30	+110	0,5	700	G-ECOPUR	SKF Ecomid
		-20	+100	0,5	700	H-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	700	S-ECOPUR	SKF Ecotal ¹⁾
		-40	+100	0,5	700	T-ECOPUR	SKF Ecotal ¹⁾

1) Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
 2) Not suitable for mineral oils
 3) Only recommended for static or quasi-static applications. Contact SKF for more information

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material	
		min.	max.			Seal	Back-up ring
		°C		m/s	bar	-	
	Hydraulic, single-acting As profile K02-P with rectangular back-up ring, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,5	250	Seal SKF Ecorubber-1	Back-up ring SKF Ecotal ¹⁾
		-25	+150	0,5	250	SKF Ecorubber-H	SKF Ecoflon 2
		-25	+100	0,5	250	SKF Ecorubber-H	SKF Ecotal ¹⁾
		-20	+200	0,5	250	SKF Ecorubber-2	SKF Ecoflon 2
		-50	+150	0,5	250	SKF Ecorubber-3 ²⁾	SKF Ecoflon 2
	Hydraulic, single-acting As profile K02-PD with tapered back-up ring, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,5	250	Seal SKF Ecorubber-1	Back-up ring SKF Ecotal ¹⁾
		-25	+150	0,5	250	SKF Ecorubber-H	SKF Ecoflon 2
		-25	+100	0,5	250	SKF Ecorubber-H	SKF Ecotal ¹⁾
		-20	+200	0,5	250	SKF Ecorubber-2	SKF Ecoflon 2
		-50	+150	0,5	250	SKF Ecorubber-3 ²⁾	SKF Ecoflon 2
	Hydraulic, single-acting Asymmetrical O-ring loaded piston seal. Best sealing effect over a wide temperature range. Especially suitable for increased sideloads and holding functions. Design optimized for ECOPUR materials.	-30	+100	0,5	400	Seal ECOPUR	Energizer NBR 70
		-30	+100	0,5	400	ECOPUR LD	NBR 70
		-30	+100	0,5	400	G-ECOPUR	NBR 70
		-20	+100	0,5	400	H-ECOPUR	NBR 70
		-20	+100	0,5	400	S-ECOPUR	NBR 70
	PTFE piston seal, single-acting Asymmetric O-ring loaded piston seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. Very good sealing effect over a wide temperature range. Variation of O-ring materials to adapt to the application requirements. Almost no dead spots for easy cleaning.	-55	+200	1	200	Seal SKF Ecoflon 1	Energizer MVQ 70
		-30	+100	1	200	SKF Ecoflon 1	NBR 70
		-50	+150	1	400	SKF Ecoflon 2,3,4	EPDM 70
		-20	+200	1	400	SKF Ecoflon 2,3,4	FPM 75
		-55	+200	1	400	SKF Ecoflon 2,3,4	MVQ 70
	PTFE piston seal, single-acting Asymmetric helicoil spring loaded piston seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. Excellent chemical and thermal resistance. Mainly used in covers as well as valve seats and stems.	-200	+260	1	200	Seal SKF Ecoflon 1	Spring 1.4310 ³⁾
		-200	+260	1	400	SKF Ecoflon 2, 3, 4	1.4310 ³⁾
		-200	+90	0,5	200	SKF Ecowear 1000	1.4310 ³⁾
		-200	+260	1	200	SKF Ecoflon 1	2.4711
		-200	+260	1	400	SKF Ecoflon 2, 3, 4	2.4711
	PTFE piston seal, single-acting Similar profile to K03-S with modified spring groove to enable the use of standardized imperial sized springs of the series 100/200/300/400. Elgiloy springs available for extreme chemical resistance	-200	+260	1	200	Seal SKF Ecoflon 1	Spring 1.4310 ³⁾
		-200	+260	1	400	SKF Ecoflon 2, 3, 4	1.4310 ³⁾
		-200	+90	0,5	200	SKF Ecowear 1000	1.4310 ³⁾
		-200	+260	1	200	SKF Ecoflon 1	2.4711
		-200	+260	1	400	SKF Ecoflon 2, 3, 4	2.4711






¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Not suitable for mineral oils
³⁾ Spring steel material specification













Piston seals

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material		
		min.	max.			Seal	Energizer	Back-up ring
		°C		m/s	bar	-		
	Hydraulic, single-acting Asymmetric O-ring loaded piston seal for standard applications based on the K01-P design with an active rectangular back-up ring for larger extrusion gaps or higher pressure ranges.	-30	+100	0,5	700	Seal ECOPUR	Energizer NBR 70	Back-up ring SKF Ecotal ¹⁾
		-30	+100	0,5	700	ECOPUR LD	NBR 70	SKF Ecomid
		-30	+100	0,5	700	G-ECOPUR	NBR 70	SKF Ecomid
		-20	+100	0,5	700	H-ECOPUR	NBR 70	SKF Ecotal ¹⁾
		-20	+100	0,5	700	S-ECOPUR	NBR 70	SKF Ecotal ¹⁾
	Hydraulic, single-acting Asymmetric O-ring loaded piston seal for standard applications based on the K01-P design with an active tapered back-up ring for larger extrusion gaps or higher pressure ranges.	-30	+100	0,5	700	Seal ECOPUR	Energizer NBR 70	Back-up ring SKF Ecotal ¹⁾
		-30	+100	0,5	700	ECOPUR LD	NBR 70	SKF Ecomid
		-30	+100	0,5	700	G-ECOPUR	NBR 70	SKF Ecomid
		-20	+100	0,5	700	H-ECOPUR	NBR 70	SKF Ecotal ¹⁾
		-20	+100	0,5	700	S-ECOPUR	NBR 70	SKF Ecotal ¹⁾
	Pneumatic, single-acting Asymmetric piston seal. Design optimized for ECOPUR materials to benefit from high wear resistance. For use in lubricated or dry pneumatic applications. Special design of sealing lip allows retention of initial lubricating film.	-30	+110	1	25	ECOPUR		
		-35	+110	1	25	ECOPUR LD		
		-30	+110	1	25	G-ECOPUR		
		-20	+110	1	25	H-ECOPUR		
		-20	+110	2	25	S-ECOPUR		
	Pneumatic, single-acting Asymmetric piston seal. Design optimized for SKF Ecorubber materials to benefit from increased chemical and thermal resistance. For use in lubricated and dry pneumatic applications. Special design of sealing lip allows retention of initial lubrication film.	-30	+100	1	25	SKF Ecorubber-1		
		-25	+150	1	25	SKF Ecorubber-H		
		-20	+200	1	25	SKF Ecorubber-2		
		-50	+150	1	25	SKF Ecorubber-3 ²⁾		
		-10	+200	1	25	SKF Ecoflas		
	Hydraulic, single-acting Symmetric unloaded lip seal for simple standard applications; not recommended for new designs. Universal usage for rod or piston applications. Design optimized for ECOPUR materials.	-30	+110	0,5	400	ECOPUR		
		-35	+110	0,5	400	ECOPUR LD		
		-30	+110	0,5	400	G-ECOPUR		
		-20	+110	0,5	400	H-ECOPUR		
		-20	+110	0,5	400	S-ECOPUR		
	Hydraulic, single-acting As profile K06-P, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,5	160	SKF Ecorubber-1		
		-25	+150	0,5	160	SKF Ecorubber-H		
		-20	+200	0,5	160	SKF Ecorubber-2		
		-50	+150	0,5	160	SKF Ecorubber-3 ²⁾		
		-10	+200	0,5	160	SKF Ecoflas		




¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Not suitable for mineral oils
³⁾ Only recommended for static or quasi-static applications. Contact SKF for more information













Piston seals

 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material			
		min.	max.						
		°C		m/s	bar	–			
 	Hydraulic, single-acting Symmetric O-ring loaded lip seal for simple standard applications; not recommended for new designs. Especially suitable for increased sideloads and holding functions. Universal usage for rod or piston applications. Design optimized for ECOPUR materials.	-30	+100	0,5	400	Seal ECOPUR	Energizer NBR 70		
		-30	+100	0,5	400	ECOPUR LD	NBR 70		
		-30	+100	0,5	400	G-ECOPUR	NBR 70		
		-20	+100	0,5	400	H-ECOPUR	NBR 70		
		-20	+100	0,5	400	S-ECOPUR	NBR 70		
-50	+100	0,5	400	T-ECOPUR	MVQ 70				
 	PTFE piston seal, single-acting Symmetric O-ring loaded lip seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. Not recommended for new designs. Variation of O-ring materials to adapt to application requirements. Universal usage for rod or piston applications.	-30	+100	1	200	Seal SKF Ecoflon 1	Energizer NBR 70		
		-55	+200	1	200	SKF Ecoflon 1	MVQ 70		
		-30	+100	1	400	SKF Ecoflon 2,3,4	NBR 70		
		-20	+200	1	400	SKF Ecoflon 2,3,4	FPM 75		
		-50	+150	1	400	SKF Ecoflon 2,3,4	EPDM 70		
		-55	+200	1	400	SKF Ecoflon 2,3,4	MVQ 70		
		-30	+90	0,5	200	SKF Ecowear 1000	NBR 70		
		-55	+90	0,5	200	SKF Ecowear 1000	MVQ 70		
		 	Hydraulic, single-acting O-ring loaded asymmetric slide ring piston seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. For extremely low and high speeds as well as positioning functions. Use X-ECOPUR materials for improved leak tightness and installation ability.	-55	+100	5	600	Seal G-ECOPUR 54D	Energizer MVQ 70
				-30	+100	5	600	G-ECOPUR 54D	NBR 70
-55	+100			5	600	X-ECOPUR, H, S	MVQ 70		
-30	+100			5	600	X-ECOPUR, H, S	NBR 70		
-20	+200			10	600	SKF Ecoflon 2,3,4	FPM 75		
-30	+100			10	600	SKF Ecoflon 2,3,4	NBR 70		
-55	+90			5	400	SKF Ecowear 1000	MVQ 70		
-30	+90			5	400	SKF Ecowear 1000	NBR 70		
 	Hydraulic, double-acting O-ring loaded symmetric slide ring piston seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. For extremely low and high speeds as well as positioning functions. Typical design for medium duty standard hydraulic pistons. Use X-ECOPUR materials for improved leak tightness and installation ability.			-55	+100	5	600	Seal G-ECOPUR 54D	Energizer MVQ 70
				-30	+100	5	600	G-ECOPUR 54D	NBR 70
		-55	+100	5	600	X-ECOPUR, H, S	MVQ 70		
		-30	+100	5	600	X-ECOPUR, H, S	NBR 70		
		-20	+200	10	600	SKF Ecoflon 2,3,4	FPM 75		
		-30	+100	10	600	SKF Ecoflon 2,3,4	NBR 70		
		-55	+90	5	400	SKF Ecowear 1000	MVQ 70		
		-30	+90	5	400	SKF Ecowear 1000	NBR 70		
		 	Hydraulic, double-acting O-ring loaded symmetric slide ring piston seal. Design optimized for ECOPUR materials for increased wear resistance and leak tightness. Typical design for light to medium duty hydraulic pistons.	-30	+100	1	250	Seal ECOPUR	Energizer NBR 70
				-30	+100	1	250	ECOPUR LD	NBR 70
-30	+100			1	250	G-ECOPUR	NBR 70		
-20	+100			1	250	H-ECOPUR	NBR 70		
-20	+100			1	250	S-ECOPUR	NBR 70		
-50	+100			1	250	T-ECOPUR	MVQ 70		
 	Hydraulic, single-acting Energizer loaded asymmetric slide ring piston seal, similar to K08-E, but special heavy duty design. Due to adaption possibilities of the energizer also applicable for special housing dimensions.	-30	+100	5	600	Seal G-ECOPUR 54D	Energizer SKF Ecorubber-1		
		-60	+100	5	600	G-ECOPUR 54D	SKF Ecosil		
		-30	+100	5	600	X-ECOPUR, H, S	SKF Ecorubber-1		
		-60	+100	5	600	X-ECOPUR, H, S	SKF Ecosil		
		-30	+100	10	600	SKF Ecoflon 2,3,4	SKF Ecorubber-1		
		-20	+200	10	600	SKF Ecoflon 2,3,4	SKF Ecorubber-2		
		-30	+90	5	400	SKF Ecowear 1000	SKF Ecorubber-1		
		-60	+90	5	400	SKF Ecowear 1000	SKF Ecosil		






Piston seals

 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static
 Grey symbols: contact SKF for application limitations











Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material				
		min.	max.							
		°C		m/s	bar	–				
 	Hydraulic, double-acting Energizer loaded asymmetric slide ring piston seal similar to K08-D, but with special heavy duty design. Due to adaption possibilities of the energizer also applicable for special housing dimensions.	-30	+100	5	600	Seal G-ECOPUR 54D	Energizer SKF Ecorubber-1			
		-60	+100	5	600	G-ECOPUR 54D	SKF Ecosil			
		-30	+100	5	600	X-ECOPUR, H, S	SKF Ecorubber-1			
		-30	+100	5	600	X-ECOPUR, H, S	SKF Ecosil			
		-30	+100	10	600	SKF Ecoflon 2,3,4	SKF Ecorubber-1			
		-20	+200	10	600	SKF Ecoflon 2,3,4	SKF Ecorubber-2			
		-30	+90	5	400	SKF Ecowear 1000	SKF Ecorubber-1			
		-60	+90	5	400	SKF Ecowear 1000	SKF Ecosil			
		 	Hydraulic, double-acting Energizer loaded compact piston seal with integrated guiding elements. Design optimized for slide rings made of ECOPUR materials for improved wear resistance and leak tightness. Typical design for medium to heavy duty standard hydraulic pistons.	-30	+100	0,5	400	Seal ECOPUR	Energizer SKF Ecorubber-1	Guide rings SKF Ecotal ¹⁾
				-30	+100	0,5	400	H-ECOPUR	SKF Ecorubber-1	SKF Ecotal ¹⁾
-30	+100			0,5	400	S-ECOPUR	SKF Ecorubber-1	SKF Ecotal ¹⁾		
-60	+100			0,5	400	T-ECOPUR	SKF Ecosil	SKF Ecotal ¹⁾		
 	Hydraulic, double-acting Energizer loaded compact piston seal with integrated guiding elements. Design optimized for slide rings made of ECOPUR materials for improved wear resistance, leak tightness and frequent movements. Typical design for medium to heavy duty standard hydraulic pistons.			-30	+100	0,5	400	Seal ECOPUR	Energizer SKF Ecorubber-1	Guide rings SKF Ecotal ¹⁾
				-30	+100	0,5	400	H-ECOPUR	SKF Ecorubber-1	SKF Ecotal ¹⁾
		-30	+100	0,5	400	S-ECOPUR	SKF Ecorubber-1	SKF Ecotal ¹⁾		
		-60	+100	0,5	400	T-ECOPUR	SKF Ecosil	SKF Ecotal ¹⁾		
		 	Hydraulic, double-acting Energizer loaded compact piston seal with integrated guiding elements. Design optimized for slide rings made of ECOPUR materials for improved wear resistance and leak tightness. Typical design for heavy duty hydraulic pistons with extreme pressures.	-30	+100	0,3	1 500	Seal ECOPUR	Energizer SKF Ecorubber-1	Guide rings SKF Ecotal ¹⁾
				-30	+100	0,3	1 500	H-ECOPUR	SKF Ecorubber-1	SKF Ecotal ¹⁾
-30	+100			0,3	1 500	S-ECOPUR	SKF Ecorubber-1	SKF Ecotal ¹⁾		
-60	+100			0,3	1 500	T-ECOPUR	SKF Ecosil	SKF Ecotal ¹⁾		
 	Hydraulic, double-acting Energizer loaded compact piston seal with integrated guiding elements. Design optimized for slide rings made of SKF Ecoflon materials for reduced friction and stick-slip. Typical design for medium to heavy duty standard hydraulic pistons.			-30	+100	1	400	Seal X-ECOPUR	Energizer SKF Ecorubber-1	Guide rings SKF Ecotal ¹⁾
				-30	+100	1	400	X-ECOPUR H	SKF Ecorubber-1	SKF Ecotal ¹⁾
		-30	+100	1,2	400	X-ECOPUR S	SKF Ecorubber-1	SKF Ecotal ¹⁾		
		-30	+100	1,5	400	SKF Ecoflon 2,3,4	SKF Ecorubber-1	SKF Ecotal ¹⁾		
		-20	+200	1,5	400	SKF Ecoflon 2,3,4	SKF Ecorubber-2	SKF Ecopaek		
		 	Hydraulic, single-acting Chevron sealing set, trimmed surface design. In back-to-back arrangement with one intermediate chevron for double sided pressure activation, in single-acting applications with more intermediate chevrons possible. For heavy industry hydraulics. For further material combinations refer to the seal data sheet.	-30	+100	0,5	500	Support ring K10-A SKF Ecorubber-1	Chevron K11-M ECOPUR	Pressure ring K12-M SKF Ecotal ¹⁾
-30	+100			0,5	500	SKF Ecotal ¹⁾	ECOPUR	X-ECOPUR		
-30	+100			0,5	500	SKF Ecotal ¹⁾	ECOPUR	SKF Ecotal ¹⁾		
-30	+110			0,5	500	SKF Ecomid	G-ECOPUR	G-ECOPUR 54D ³⁾		
-20	+100			0,5	500	SKF Ecorubber-1	H-ECOPUR	SKF Ecotal ¹⁾		
-20	+100			0,5	500	SKF Ecotal ¹⁾	H-ECOPUR	X-ECOPUR H ²⁾		
-20	+100			0,5	500	SKF Ecotal ¹⁾	H-ECOPUR	SKF Ecotal ¹⁾		
-20	+100			0,5	500	SKF Ecorubber-1	S-ECOPUR	SKF Ecotal ¹⁾		
-20	+100			0,5	500	SKF Ecotal ¹⁾	S-ECOPUR	X-ECOPUR S ²⁾		
-20	+100			0,5	500	SKF Ecotal ¹⁾	S-ECOPUR	SKF Ecotal ¹⁾		
-30	+100			0,5	250	SKF Ecoflon 2	SKF Ecorubber-1	SKF Ecoflon 2		
-25	+150			0,5	250	SKF Ecoflon 2	SKF Ecorubber-H	SKF Ecoflon 2		
-20	+200			0,5	250	SKF Ecoflon 2	SKF Ecorubber-2	SKF Ecoflon 2		

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Alternative SKF Ecotal up to 400 mm, SKF Ecomid above 260 mm; please refer to the seal data sheet regarding temperature range
³⁾ Alternative SKF Ecomid; please refer to the seal data sheet regarding temperature range

Piston seals




 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static

Grey symbols: contact SKF for application limitations







Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material		
		min.	max.			–	–	
		°C		m/s	bar			
 	Hydraulic, single-acting Symmetric lip seal as K22-P, but optimized for SKF Ecorubber materials with increased chemical and thermal properties.	-30	+100	0,5	160	Seal SKF Ecorubber-1	Support ring SKF Ecotal ¹⁾	
		-25	+150	0,5	160	SKF Ecorubber-H	SKF Ecoflon 2	
		-25	+100	0,5	160	SKF Ecorubber-H	SKF Ecotal ¹⁾	
		-20	+200	0,5	160	SKF Ecorubber-2	SKF Ecoflon 2	
		-50	+150	0,5	160	SKF Ecorubber-3 ²⁾	SKF Ecoflon 2	
 	Hydraulic, double-acting Energizer loaded compact piston seal with integrated back-up rings. Design optimized for slide rings made of ECOPUR materials for improved wear resistance and leak tightness. Typical design for heavy duty standard hydraulic pistons. External guiding elements required.	-30	+100	0,5	400	Seal ECOPUR	Energizer SKF Ecorubber-1	Back-up rings SKF Ecotal ¹⁾
		-30	+100	0,5	400	H-ECOPUR	SKF Ecotal ¹⁾	
		-30	+100	0,5	400	S-ECOPUR	SKF Ecotal ¹⁾	
		-30	+100	0,5	400	T-ECOPUR	SKF Ecotal ¹⁾	
		-60	+100	0,5	400	T-ECOPUR	SKF Ecotal ¹⁾	
 	Hydraulic, double-acting Energizer loaded compact piston seal with integrated back-up rings. Design optimized for slide rings made of ECOPUR materials for improved wear resistance and frequent movements. Typical design for heavy duty standard hydraulic pistons. External guiding elements required.	-30	+100	0,5	400	Seal ECOPUR	Energizer SKF Ecorubber-1	Back-up rings SKF Ecotal ¹⁾
		-30	+100	0,5	400	H-ECOPUR	SKF Ecotal ¹⁾	
		-30	+100	0,5	400	S-ECOPUR	SKF Ecotal ¹⁾	
		-30	+100	0,5	400	T-ECOPUR	SKF Ecotal ¹⁾	
		-60	+100	0,5	400	T-ECOPUR	SKF Ecotal ¹⁾	
 	Hydraulic, double-acting Energizer loaded compact piston seal with integrated back-up rings. Design optimized for slide rings made of ECOPUR materials for improved wear resistance and leak tightness. Typical design for heavy duty hydraulic pistons with extreme pressures. External guiding elements required.	-30	+100	0,3	1 500	Seal ECOPUR	Energizer SKF Ecorubber-1	Back-up rings SKF Ecotal ¹⁾
		-30	+100	0,3	1 500	H-ECOPUR	SKF Ecotal ¹⁾	
		-30	+100	0,3	1 500	S-ECOPUR	SKF Ecotal ¹⁾	
		-30	+100	0,3	1 500	T-ECOPUR	SKF Ecotal ¹⁾	
		-60	+100	0,3	1 500	T-ECOPUR	SKF Ecotal ¹⁾	
 	Hydraulic, double-acting Energizer loaded compact piston seal with integrated back-up rings. Design optimized for slide rings made of SKF Ecoflon materials to reduce friction and stick-slip effects. Typical design for heavy duty standard hydraulic pistons. External guiding elements required.	-30	+100	1	400	Seal X-ECOPUR	Energizer SKF Ecorubber-1	Back-up rings SKF Ecotal ¹⁾
		-30	+100	1	400	X-ECOPUR H	SKF Ecorubber-1	SKF Ecotal ¹⁾
		-30	+100	1	400	X-ECOPUR S	SKF Ecorubber-1	SKF Ecotal ¹⁾
		-30	+100	1,5	400	SKF Ecoflon 2,3,4	SKF Ecorubber-1	SKF Ecotal ¹⁾
		-20	+200	1,5	400	SKF Ecoflon 2,3,4	SKF Ecorubber-2	SKF Ecopaek

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Not suitable for mineral oils

Piston seals

 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static

Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material		
		min.	max.			–	–	
		°C		m/s	bar			
 	Hydraulic, single-acting Chevron ring with flexible lip design. Replacement part for standard commercial housings (male and female adapter mainly made of metal).	-30	+110	0,5	500	Seal ECOPUR		
		-35	+110	0,5	500	ECOPUR LD		
		-30	+110	0,5	500	G-ECOPUR		
		-20	+110	0,5	500	H-ECOPUR		
		-20	+110	0,5	500	S-ECOPUR		
		-50	+100	0,5	500	T-ECOPUR		
		-30	+100	0,5	250	SKF Ecorubber-1		
		-25	+150	0,5	250	SKF Ecorubber-H		
		-20	+200	0,5	250	SKF Ecorubber-2		
		-50	+150	0,5	250	SKF Ecorubber-3		
		-10	+200	0,5	250	SKF Ecoflas		
 	Hydraulic, single-acting Chevron sealing set, designed with extremely flexible sealing lips for difficult operating conditions like bad guiding, large tolerance range. Available as total chevron sealing set as well as intermediate chevrons only (in case of metal male and female adapters). For further material combinations refer to the seal data sheet	-30	+100	0,5	500	Pressure ring SKF Ecotal ¹⁾	Chevron ECOPUR	Support ring SKF Ecorubber-1
		-30	+100	0,5	500	X-ECOPUR	ECOPUR	SKF Ecotal ¹⁾
		-30	+100	0,5	500	SKF Ecotal ¹⁾	ECOPUR	SKF Ecotal ¹⁾
		-30	+110	0,5	500	G-ECOPUR 54D	G-ECOPUR	SKF Ecomid
		-20	+100	0,5	500	SKF Ecotal ¹⁾	H-ECOPUR	SKF Ecorubber-1
		-20	+100	0,5	500	X-ECOPUR H	H-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾	H-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾	S-ECOPUR	SKF Ecorubber-1
		-20	+100	0,5	500	X-ECOPUR S	S-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	500	X-ECOPUR S	S-ECOPUR	SKF Ecotal ¹⁾
		 	Hydraulic, double-acting Space saving compact piston seal. Design optimized for ECOPUR materials. Also commonly used as O-ring replacement to prevent twisting of the seal.	-30	+110	0,4	400	Seal ECOPUR
-35	+110			0,4	400	ECOPUR LD		
-30	+110			0,4	400	G-ECOPUR		
-20	+110			0,4	400	H-ECOPUR		
-20	+110			0,4	400	S-ECOPUR		
-50	+100			0,4	400	T-ECOPUR		

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range

B

Rod seals


Introduction

Rod and buffer seals provide the sealing function in sliding motion between the cylinder head of a hydraulic or pneumatic cylinder and the piston rod. Depending on the application, a rod sealing system can consist of a rod seal and a buffer seal or a rod seal only, both in combination with a wiper seal that also has a strong influence on the system performance. Rod sealing systems for heavy duty applications typically consist of a combination of both seal types, whereas the buffer seal is arranged between the rod seal and the piston in the cylinder head.


In addition to the sealing function, rod seals also provide a thin lubrication film on the piston rod that lubricates themselves and the wiper seals. The lubricant also inhibits corrosion of the piston rod surface. Well engineered seal designs allow this required thin lubrication film while utilizing hydrodynamics to create a so-called "back-pumping effect" during the return stroke to enable optimum sealing performance.

Selecting profiles and materials for a rod sealing system is a complex task, considering all possible cylinder designs and application criteria. SKF supplies standard rod and buffer seals in many different profiles and in a wide range of materials, series and sizes, which make them appropriate for a wide variety of operating conditions and applications. On the following pages you will find all the available rod and buffer seal designs that are available as machined versions utilizing the SKF SEALJET system.

Rod seals are typically single-acting seals, which means that the fluid pressure acts from inside the cylinder on one side of the seal only. Pressures acting on the rod side of the piston can be more than 400 bar. Pressure peaks can be even higher. The pressure acting on the rod seal increases the contact forces between the rod seal and the rod surface. Therefore, rod seal materials need to be wear resistant and the rod surface needs to be manufactured according to the recommended surface specifications.

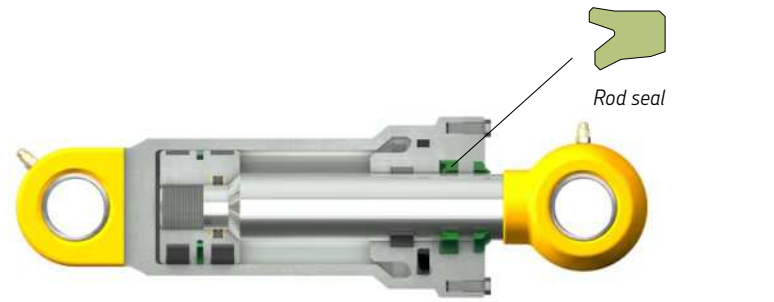

Typical situation using a single rod seal S01-P in a hydraulic cylinder

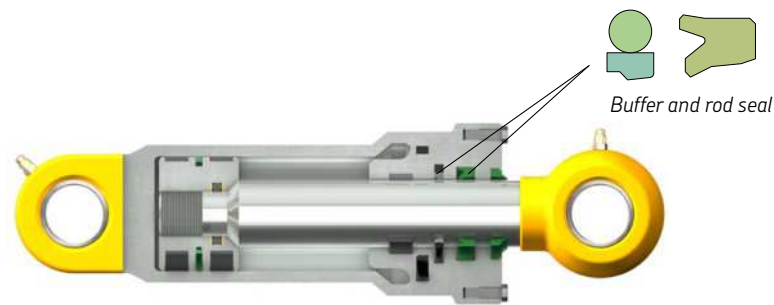


Tandem rod sealing system with S09-E as primary seal (buffer seal) and S01-P as secondary seal (rod seal)



Single-acting Chevron sealing set S1012-T1 for heavy duty hydraulic applications made of ECOPUR and SKF Ecotal

Single-acting hydraulic seal S01-P made of H-ECOPUR

Rod seals

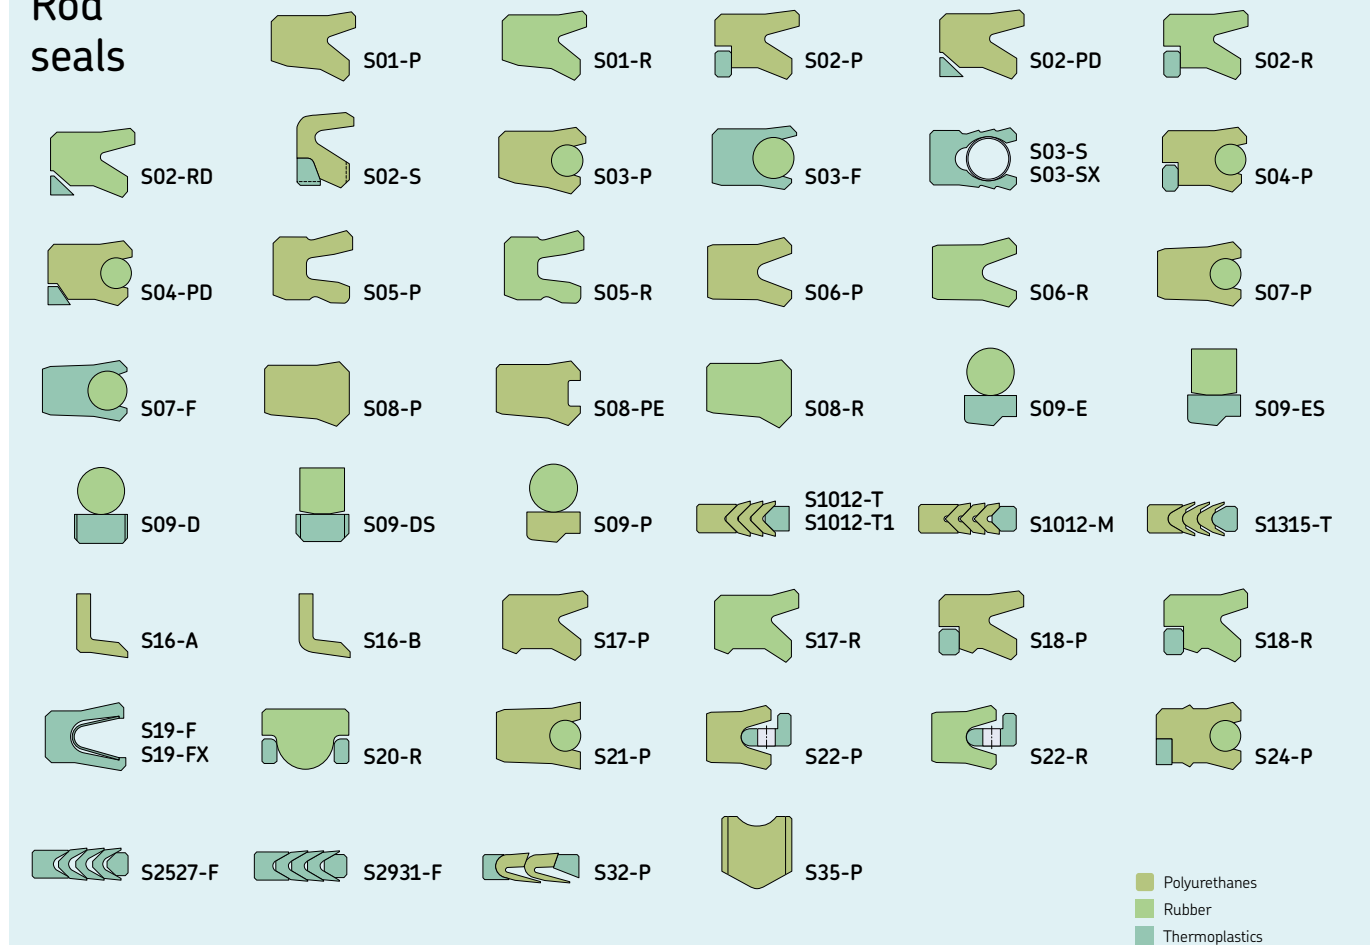

Rod seal selection guide

Unloaded lip seal designs

Lip seals without compact compression to minimize friction. Especially in the low pressure ranges the contact force is increased by the system pressure when it is needed. Typical for applications with frequent movement; focus on low friction and leak tightness.

Standard use	Symmetric design when usage as piston or rod seal is required	Back-up designs for high pressures and large extrusion gaps	Special design variations
 S01-P S01-R	 S06-P S06-R	 S02-P S02-R S18-P S18-R S02-PD S02-RD	<p>Pneumatics Stabilization lip Retainer ring</p> S05-P S17-P S22-P S05-R S17-R S22-R
		 S02-PD S02-RD	<p>Chevron packing with flexible lips PTFE-design Single lip</p> S32-P S19-F S16-A S19-FX S16-B

Loaded lip seal designs

Lip seals with a softer energizer in between (compact compressed) are typical for applications with increased sideloads and/or low temperatures; focus on leak tightness. Seals made of PTFE need energizer elements for operation.

 S03-P S03-F	 S07-P S07-F	 S04-P S04-PD	 S21-P S03-S S03-SX
		 S04-P S24-P	

Compact seal designs

Traditional compact seal design typically used in hydraulic cylinders; simple design also often used as static seals; dynamic seals use slide elements for improved frictional behaviour.

TPU design S35-P	Rubber design S20-R	Chevron packings for open housings for extreme contact forces & extremely small profiles S1012-T S1315-T S08-P S08-R S2527-F S2931-F S08-PE
-------------------------	----------------------------	--

Activated slide rings & tandem seal designs

Mainly used in dynamic applications, allowing very good sliding properties and low break-away forces.

Single-acting		Double-acting		Unloaded Lip seal design
Standard	Heavy duty	Standard	Heavy duty	
 S09-E	 S09-ES	 S09-D	 S09-DS	 S02-S
Remark: Use X-ECOPUR as slide ring material to improve static sealing behavior.				

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material
		min.	max.			
		°C		m/s	bar	-
 S01-P	Hydraulic, single-acting Asymmetric rod seal with very good sealing effect over a wide temperature range and good back pumping ability. Design optimized for ECOPUR materials. Also used as rod seal in combination with buffer seals S02-S or S09.	-30	+110	0,5	400	ECOPUR
		-35	+110	0,5	400	ECOPUR LD
		-30	+110	0,5	400	G-ECOPUR
		-20	+110	0,5	400	H-ECOPUR
		-20	+110	0,5	400	S-ECOPUR
		-50	+100	0,5	400	T-ECOPUR
 S01-R	Hydraulic, single-acting As profile S01-P, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,5	160	Seal SKF Ecorubber-1
		-25	+150	0,5	160	SKF Ecorubber-H
		-20	+200	0,5	160	SKF Ecorubber-2
		-50	+150	0,5	160	SKF Ecorubber-3 ²⁾
		-10	+200	0,5	160	SKF Ecoflas
		-60	+200	-	-	SKF Ecosil ³⁾
 S02-P	Hydraulic, single-acting Asymmetric rod seal for standard applications based on the S01-P design with an active rectangular back-up ring for larger extrusion gaps or higher pressure ranges.	-30	+100	0,5	700	Seal ECOPUR
		-35	+110	0,5	700	ECOPUR LD
		-30	+110	0,5	700	G-ECOPUR
		-20	+100	0,5	700	H-ECOPUR
		-20	+100	0,5	700	S-ECOPUR
		-40	+100	0,5	700	T-ECOPUR
						Back-up ring SKF Ecotal ¹⁾ SKF Ecomid SKF Ecomid SKF Ecotal ¹⁾ SKF Ecotal ¹⁾ SKF Ecotal ¹⁾
 S02-PD	Hydraulic, single-acting Asymmetric rod seal for standard applications based on the S01-P design with an active tapered back-up ring for larger extrusion gaps or higher pressure ranges.	-30	+100	0,5	700	Seal ECOPUR
		-35	+110	0,5	700	ECOPUR LD
		-30	+110	0,5	700	G-ECOPUR
		-20	+100	0,5	700	H-ECOPUR
		-20	+100	0,5	700	S-ECOPUR
		-40	+100	0,5	700	T-ECOPUR
						Back-up ring SKF Ecotal ¹⁾ SKF Ecomid SKF Ecomid SKF Ecotal ¹⁾ SKF Ecotal ¹⁾ SKF Ecotal ¹⁾
 S02-R	Hydraulic, single-acting As profile S02-P with an active rectangular back-up ring, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,5	250	Seal SKF Ecorubber-1
		-25	+150	0,5	250	SKF Ecorubber-H
		-25	+100	0,5	250	SKF Ecorubber-H
		-20	+200	0,5	250	SKF Ecorubber-2
		-50	+150	0,5	250	SKF Ecorubber-3 ²⁾
		-40	+100	0,5	250	SKF Ecorubber-3 ²⁾
		-10	+200	0,5	250	SKF Ecoflas
				Back-up ring SKF Ecotal ¹⁾ SKF Ecoflon 2 SKF Ecotal ¹⁾ SKF Ecoflon 2 SKF Ecoflon 2 SKF Ecotal ¹⁾ SKF Ecotal ¹⁾ SKF Ecopaek		
 S02-RD	Hydraulic, single-acting As profile S02-PD with an active tapered back-up ring, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,5	250	Seal SKF Ecorubber-1
		-25	+150	0,5	250	SKF Ecorubber-H
		-25	+100	0,5	250	SKF Ecorubber-H
		-20	+200	0,5	250	SKF Ecorubber-2
		-50	+150	0,5	250	SKF Ecorubber-3 ²⁾
		-40	+100	0,5	250	SKF Ecorubber-3 ²⁾
		-10	+200	0,5	250	SKF Ecoflas
				Back-up ring SKF Ecotal ¹⁾ SKF Ecoflon 2 SKF Ecotal ¹⁾ SKF Ecoflon 2 SKF Ecoflon 2 SKF Ecotal ¹⁾ SKF Ecotal ¹⁾ SKF Ecopaek		

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Not suitable for mineral oils
³⁾ Only recommended for static or quasi-static applications. Contact SKF for more information

Rod seals

Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material			
		min.	max.			Seal	Back-up ring		
		°C		m/s	bar	-			
 	S02-S Hydraulic, single-acting Asymmetric rod seal with an integrated back-up ring for special housings (DIN/ISO 7425 part 2) and for use as buffer seal in the rod sealing system. Design optimized for ECOPUR materials.	-30	+100	0,5	400	Seal	Back-up ring		
							ECOPUR	SKF Ecotal ¹⁾	
							H-ECOPUR	SKF Ecotal ¹⁾	
							S-ECOPUR	SKF Ecotal ¹⁾	
		-40	+100	0,5	400	T-ECOPUR	SKF Ecotal ¹⁾		
 	S03-P Hydraulic, single-acting Asymmetrical O-ring loaded rod seal. Best sealing effect over a wide temperature range. Especially suitable for increased sideloads and holding functions. Design optimized for ECOPUR materials.	-30	+100	0,5	400	Seal	Energizer		
							ECOPUR	NBR 70	
							ECOPUR LD	NBR 70	
							G-ECOPUR	NBR 70	
							H-ECOPUR	NBR 70	
							S-ECOPUR	NBR 70	
		-50	+100	0,5	400	T-ECOPUR	MVQ 70		
 	S03-F PTFE rod seal, single-acting Asymmetric O-ring loaded rod seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. Very good sealing effect over a wide temperature range. Variation of O-ring materials to adapt to the application requirements. Almost no dead spots for easy cleaning.	-55	+200	1	200	Seal	Energizer		
							SKF Ecoflon 1	MVQ 70	
							SKF Ecoflon 1	NBR 70	
							SKF Ecoflon 2,3,4	EPDM 70	
							SKF Ecoflon 2,3,4	FPM 75	
							SKF Ecoflon 2,3,4	MVQ 70	
							SKF Ecoflon 2,3,4	NBR 70	
							SKF Ecowear 1000	MVQ 70	
		-30	+90	0,5	200	SKF Ecowear 1000	NBR 70		
 	S03-S PTFE rod seal, single-acting Asymmetric helicoil spring loaded rod seal. Design optimized for SKF Ecoflon to reduce friction and stick-slip effects. Excellent chemical and thermal resistance. Mainly used in covers as well as valve seats and stems.	-200	+260	1	200	Seal	Spring		
							SKF Ecoflon 1	1.4310 ²⁾	
							SKF Ecoflon 2,3,4	1.4310 ²⁾	
							SKF Ecowear 1000	1.4310 ²⁾	
 	S03-SX PTFE rod seal, single-acting Similar profile to S03-S with modified spring groove to enable the use of standardized imperial sized springs of the series 100/200/300/400. Elgiloy springs available for extreme chemical resistance	-200	+260	1	200	Seal	Spring		
							SKF Ecoflon 1	1.4310 ²⁾	
							SKF Ecoflon 1	2.4711 ²⁾	
							SKF Ecoflon 2, 3, 4	1.4310 ²⁾	
							SKF Ecoflon 2, 3, 4	2.4711 ²⁾	
							SKF Ecowear 1000	1.4310 ²⁾	
							SKF Ecowear 1000	2.4711 ²⁾	
 	S04-P Hydraulic, single-acting Asymmetric O-ring loaded rod seal for standard applications based on the S01-P design with an active rectangular back-up ring for larger extrusion gaps or higher pressure ranges.	-30	+100	0,5	700	Seal	Energizer	Back-up ring	
							ECOPUR	NBR 70	SKF Ecotal ¹⁾
							ECOPUR LD	NBR 70	SKF Ecomid
							G-ECOPUR	NBR 70	SKF Ecomid
							H-ECOPUR	NBR 70	SKF Ecotal ¹⁾
							S-ECOPUR	NBR 70	SKF Ecotal ¹⁾
							T-ECOPUR	NBR 70	SKF Ecotal ¹⁾
							MVQ 70	NBR 70	SKF Ecotal ¹⁾

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Not suitable for mineral oils
³⁾ Only recommended for static or quasi-static applications. Contact SKF for more information

Rod seals

Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material			
		min.	max.			Seal	Energizer	Back-up ring	
		°C		m/s	bar	-			
 	S04-PD Hydraulic, single-acting Asymmetric O-ring loaded rod seal for standard applications based on the S01-P design with an active tapered back-up ring for larger extrusion gaps or higher pressure ranges.	-30	+100	0,5	700	Seal	Energizer	Back-up ring	
							ECOPUR	NBR 70	SKF Ecotal ¹⁾
							ECOPUR LD	NBR 70	SKF Ecomid
							G-ECOPUR	NBR 70	SKF Ecomid
							H-ECOPUR	NBR 70	SKF Ecotal ¹⁾
							S-ECOPUR	NBR 70	SKF Ecotal ¹⁾
		-40	+100	0,5	700	T-ECOPUR	MVQ 70	SKF Ecotal ¹⁾	
 	S05-P Pneumatic, single-acting Asymmetric rod seal. Design optimized for ECOPUR materials to benefit from high wear resistance. For use in lubricated or dry pneumatic applications. Special design of sealing lip allows retention of initial lubricating film.	-30	+110	1	25	ECOPUR			
							ECOPUR LD		
							G-ECOPUR		
							H-ECOPUR		
							S-ECOPUR		
							T-ECOPUR		
 	S05-R Pneumatic, single-acting Asymmetric rod seal. Design optimized for SKF Ecorubber materials to benefit from increased chemical and thermal resistance. For use in lubricated and dry pneumatic applications. Special design of sealing lip allows retention of initial lubricating film.	-30	+100	1	25	SKF Ecorubber-1			
							SKF Ecorubber-H		
							SKF Ecorubber-2		
							SKF Ecorubber-3 ²⁾		
							SKF Ecoflon		
 	S06-P Hydraulic, single-acting Symmetric unloaded lip seal for simple standard applications; not recommended for new designs. Universal usage for rod or piston applications. Design optimized for ECOPUR materials.	-30	+110	0,5	400	ECOPUR			
							ECOPUR LD		
							G-ECOPUR		
							H-ECOPUR		
							S-ECOPUR		
							T-ECOPUR		
 	S06-R Hydraulic, single-acting As profile S06-P, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,5	160	SKF Ecorubber-1			
							SKF Ecorubber-H		
							SKF Ecorubber-2		
							SKF Ecorubber-3 ²⁾		
							SKF Ecoflon		
							SKF Ecosil ³⁾		
 	S07-P Hydraulic, single-acting Symmetric O-ring loaded lip seal for simple standard applications; not recommended for new designs. Especially suitable for increased sideloads and holding functions. Universal usage for rod or piston applications. Design optimized for ECOPUR materials.	-30	+100	0,5	400	Seal	Energizer		
							ECOPUR	NBR 70	
							ECOPUR LD	NBR 70	
							G-ECOPUR	NBR 70	
							H-ECOPUR	NBR 70	
							S-ECOPUR	NBR 70	
							T-ECOPUR	NBR 70	
							MVQ 70		

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Not suitable for mineral oils
³⁾ Only recommended for static or quasi-static applications. Contact SKF for more information

Rod seals

Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material	
		min.	max.				
		°C		m/s	bar	–	
 	PTFE rod seal, single-acting Symmetric O-ring loaded lip seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. Not recommended for new designs. Variation of O-ring materials to adapt to application requirements. Universal usage for rod or piston applications.	-55	+200	1	200	Seal SKF Ecoflon 1	Energizer MVQ 70
		-30	+100	1	200	SKF Ecoflon 1	NBR 70
		-50	+150	1	400	SKF Ecoflon 2,3,4	EPDM 70
		-20	+200	1	400	SKF Ecoflon 2,3,4	FPM 75
		-55	+200	1	400	SKF Ecoflon 2,3,4	MVQ 70
 	Hydraulic, single-acting Asymmetric compact rod seal with stable fit in the housing. Compact design mainly used to seal high viscosity fluids or for extreme small housings, not suitable for high speed applications. S08-P compact design, no groove.	-30	+110	0,3	400	ECOPUR	
		-20	+110	0,3	400	H-ECOPUR	
		-20	+110	0,3	400	S-ECOPUR	
		-50	+100	0,3	400	T-ECOPUR	
 	Hydraulic, single-acting Asymmetric compact rod seal with stable fit in the housing. Compact design mainly used to seal high viscosity fluids or for extreme small housings, not suitable for high speed applications. S08-PE with small groove.	-30	+110	0,3	400	ECOPUR	
		-20	+110	0,3	400	H-ECOPUR	
		-20	+110	0,3	400	S-ECOPUR	
		-50	+100	0,3	400	T-ECOPUR	
 	Hydraulic, single-acting As profile S08-P, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,3	160	SKF Ecorubber-1	
		-25	+150	0,3	160	SKF Ecorubber-H	
		-20	+200	0,3	160	SKF Ecorubber-2	
		-50	+150	0,3	160	SKF Ecorubber-3 ¹⁾	
		-10	+200	0,3	160	SKF Ecoflas	
 	Hydraulic, single-acting O-ring loaded asymmetric slide ring rod seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. For extremely low and high speeds as well as positioning functions. Typically in tandem design or as a buffer seal in combination with S01-P as a rod seal. Use X-ECOPUR materials for improved leak tightness and installation ability.	-55	+100	5	600	Seal G-ECOPUR 54D	Energizer MVQ 70
		-30	+100	5	600	G-ECOPUR 54D	NBR 70
		-55	+100	5	600	X-ECOPUR, H, S	MVQ 70
		-30	+100	5	600	X-ECOPUR, H, S	NBR 70
		-20	+200	10	600	SKF Ecoflon 2,3,4	FPM 75
 	Hydraulic, double-acting O-ring loaded symmetric slide ring rod seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. For extremely low and high speeds as well as positioning functions. Typical design for medium duty standard hydraulic rods. Use X-ECOPUR materials for improved leak tightness and installation ability.	-55	+100	5	600	Seal G-ECOPUR 54D	Energizer MVQ 70
		-30	+100	5	600	G-ECOPUR 54D	NBR 70
		-55	+100	5	600	X-ECOPUR, H, S	MVQ 70
		-30	+100	5	600	X-ECOPUR, H, S	NBR 70
		-20	+200	10	600	SKF Ecoflon 2,3,4	FPM 75

¹⁾ Not suitable for mineral oils

Rod seals

Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material		
		min.	max.					
		°C		m/s	bar	–		
 	Hydraulic, single-acting O-ring loaded asymmetric slide ring rod seal. Design optimized for ECOPUR materials for increased wear resistance and leak tightness. Typical design for light to medium duty hydraulic rods.	-30	+100	1	250	Seal ECOPUR	Energizer NBR 70	
		-30	+100	1	250	ECOPUR LD	NBR 70	
		-30	+100	1	250	G-ECOPUR	NBR 70	
		-20	+100	1	250	H-ECOPUR	NBR 70	
		-20	+100	1	250	S-ECOPUR	NBR 70	
 	Hydraulic, single-acting Energizer loaded asymmetric slide ring rod seal, similar to S09-E, but special heavy duty design. Due to adaption possibilities of the energizer also applicable for special housing dimensions.	-30	+100	5	600	Seal G-ECOPUR 54D	Energizer SKF Ecorubber-1	
		-60	+100	5	600	G-ECOPUR 54D	SKF Ecosil	
		-30	+100	5	600	X-ECOPUR, H, S	SKF Ecorubber-1	
		-60	+100	5	600	X-ECOPUR, H, S	SKF Ecosil	
		-30	+100	10	600	SKF Ecoflon 2,3,4	SKF Ecorubber-1	
 	Hydraulic, double-acting Energizer loaded asymmetric slide ring rod seal similar to S09-D, but with special heavy duty design. Due to adaption possibilities of the energizer also applicable for special housing dimensions.	-30	+100	5	600	Seal G-ECOPUR 54D	Energizer SKF Ecorubber-1	
		-60	+100	5	600	G-ECOPUR 54D	SKF Ecosil	
		-30	+100	5	600	X-ECOPUR, H, S	SKF Ecorubber-1	
		-60	+100	5	600	X-ECOPUR, H, S	SKF Ecosil	
		-30	+100	10	600	SKF Ecoflon 2,3,4	SKF Ecorubber-1	
 	Hydraulic, single-acting Chevron sealing set, trimmed surface design. For heavy industry hydraulics.	-30	+100	0,5	500	Support ring S10-A SKF Ecorubber-1	Chevron S11-M ECOPUR	Pressure ring S12-M SKF Ecotal ¹⁾
		-30	+100	0,5	500	SKF Ecotal ¹⁾	ECOPUR	X-ECOPUR ²⁾
		-30	+100	0,5	500	SKF Ecotal ¹⁾	ECOPUR	SKF Ecotal ¹⁾
		-30	+110	0,5	500	SKF Ecomid	G-ECOPUR	G-ECOPUR 54D ³⁾
		-20	+100	0,5	500	SKF Ecorubber-1	H-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾	H-ECOPUR	X-ECOPUR H ²⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾	H-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecorubber-1	S-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾	S-ECOPUR	X-ECOPUR S ²⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾	S-ECOPUR	SKF Ecotal
 	Hydraulic, single-acting Chevron sealing set, machined surface design. For heavy industry hydraulics.	-30	+100	0,5	500	Support ring S10-A SKF Ecorubber-1	Chevron S11-T ECOPUR	Pressure ring S12-T SKF Ecotal ¹⁾
		-30	+100	0,5	500	SKF Ecotal ¹⁾	ECOPUR	X-ECOPUR ²⁾
		-30	+100	0,5	500	SKF Ecotal ¹⁾	ECOPUR	SKF Ecotal ¹⁾
		-30	+110	0,5	500	SKF Ecomid	G-ECOPUR	G-ECOPUR 54D ³⁾
		-20	+100	0,5	500	SKF Ecorubber-1	H-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾	H-ECOPUR	X-ECOPUR H ²⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾	H-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecorubber-1	S-ECOPUR	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾	S-ECOPUR	X-ECOPUR S ²⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾	S-ECOPUR	SKF Ecotal ¹⁾

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Alternative SKF Ecotal up to 400 mm, SKF Ecomid above 260 mm; please refer to the seal data sheet regarding temperature range
³⁾ Alternative SKF Ecomid; please refer to the seal data sheet regarding temperature range

Rod seals

Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material
		min.	max.			
		°C		m/s	bar	-
 	S1012-T1 Hydraulic, single-acting Chevron sealing set for heavy industry hydraulics similar to the S1012-T design, with reduced friction level, increased seal lifetime and increased system efficiency for the hydraulic cylinder. For further material combinations refer to the seal data sheet	-30	+100	0,5	500	Support ring S10-A SKF Ecorubber-1
		-30	+100	0,5	500	ECOPUR
		-30	+100	0,5	500	SKF Ecotal ¹⁾
		-30	+100	0,5	500	SKF Ecotal ¹⁾
		-30	+110	0,5	500	SKF Ecomid
		-20	+100	0,5	500	SKF Ecorubber-1
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
 	S1315-T Hydraulic, single-acting Chevron sealing set, design with flexible sealing lips, good sealing ability in higher pressure range. For heavy industry hydraulics, water-hydraulic systems. For further material combinations refer to the seal data sheet	-30	+100	0,5	500	Support ring S13-A SKF Ecorubber-1
		-30	+100	0,5	500	SKF Ecotal ¹⁾
		-30	+100	0,5	500	SKF Ecotal ¹⁾
		-30	+110	0,5	500	SKF Ecomid
		-20	+100	0,5	500	SKF Ecorubber-1
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
		-20	+100	0,5	500	SKF Ecotal ¹⁾
 	S16-A Hydraulic/pneumatic, single-acting Simple hat seal, usually fixed in housing with clamp flange. Mainly used for replacement in old hydraulic and pneumatic cylinders or for secondary applications.	-30	+110	0,5	160	ECOPUR
		-35	+110	0,5	160	ECOPUR LD
		-30	+110	0,5	160	G-ECOPUR
		-20	+110	0,5	160	H-ECOPUR
		-20	+110	0,5	160	S-ECOPUR
		-50	+100	0,5	160	T-ECOPUR
		-30	+100	0,5	160	SKF Ecorubber-1
		-25	+150	0,5	160	SKF Ecorubber-H
		-20	+200	0,5	160	SKF Ecorubber-2
		-50	+150	0,5	160	SKF Ecorubber-3 ⁴⁾
		-10	+200	0,5	160	SKF Ecoflas
		 	S16-B Hydraulic/pneumatic, single-acting Simple hat seal, usually fixed in housing with clamp flange. Mainly used for replacement in old hydraulic and pneumatic cylinders or for secondary applications.	-30	+110	0,5
-35	+110			0,5	160	ECOPUR LD
-30	+110			0,5	160	G-ECOPUR
-20	+110			0,5	160	H-ECOPUR
-20	+110			0,5	160	S-ECOPUR
-50	+100			0,5	160	T-ECOPUR
-30	+100			0,5	160	SKF Ecorubber-1
-25	+150			0,5	160	SKF Ecorubber-H
-20	+200			0,5	160	SKF Ecorubber-2
-50	+150			0,5	160	SKF Ecorubber-3 ⁴⁾
-10	+200			0,5	160	SKF Ecoflas
 	S17-P Hydraulic, single-acting Asymmetric rod seal with additional stabilization lip. Very good sealing effect over a wide temperature range and good back pumping ability. Design optimized for ECOPUR materials. Also used in telescopic cylinders with low CS/L-ratio.			-30	+110	0,5
		-35	+110	0,5	400	ECOPUR LD
		-30	+110	0,5	400	G-ECOPUR
		-20	+110	0,5	400	H-ECOPUR
		-20	+110	0,5	400	S-ECOPUR
		-50	+100	0,5	400	T-ECOPUR

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Alternative SKF Ecotal up to Ø 400 mm, SKF Ecomid above Ø 260 mm; please refer to the seal data sheet regarding temperature range
³⁾ Alternative SKF Ecomid; please refer to the seal data sheet regarding temperature range
⁴⁾ Not suitable for mineral oils

Rod seals

Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material			
		min.	max.						
		°C		m/s	bar	-			
 	S17-R Hydraulic, single-acting As profile S17-P, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,5	160	SKF Ecorubber-1			
		-25	+150	0,5	160	SKF Ecorubber-H			
		-20	+200	0,5	160	SKF Ecorubber-2			
		-50	+150	0,5	160	SKF Ecorubber-3 ²⁾			
		-10	+200	0,5	160	SKF Ecoflas			
		 	S18-P Hydraulic, single-acting Asymmetric rod seal for standard applications based on S17-P with additional rectangular active back-up ring for larger extrusion gaps or higher pressure ranges.	-30	+100	0,5	600	Seal ECOPUR	Back-up ring SKF Ecotal ¹⁾
-35	+110			0,5	600	ECOPUR LD	SKF Ecomid		
-30	+110			0,5	600	G-ECOPUR	SKF Ecomid		
-20	+100			0,5	600	H-ECOPUR	SKF Ecotal ¹⁾		
-20	+100			0,5	600	S-ECOPUR	SKF Ecotal ¹⁾		
-40	+100			0,5	600	T-ECOPUR	SKF Ecotal ¹⁾		
 	S18-R Hydraulic, single-acting As profile S18-P, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	0,5	250	Seal SKF Ecorubber-1	Back-up ring SKF Ecotal ¹⁾		
		-25	+150	0,5	250	SKF Ecorubber-H	SKF Ecoflon 2		
		-25	+100	0,5	250	SKF Ecorubber-H	SKF Ecotal ¹⁾		
		-20	+200	0,5	250	SKF Ecorubber-2	SKF Ecoflon 2		
		-50	+150	0,5	250	SKF Ecorubber-3 ²⁾	SKF Ecoflon 2		
		-40	+100	0,5	250	SKF Ecorubber-3 ²⁾	SKF Ecotal ¹⁾		
 	S19-F PTFE rod seal, single-acting Asymmetric finger spring loaded rod seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. Excellent chemical and thermal resistance, therefore mainly used in chemical, pharmaceutical and food industry.	-200	+260	15	200	Seal SKF Ecoflon 1	Spring 1.4310 ³⁾		
		-200	+260	15	400	SKF Ecoflon 2, 3, 4	1.4310 ³⁾		
		-200	+90	15	200	SKF Ecowear	1.4310 ³⁾		
		 	S19-FX PTFE rod seal, single-acting Similar profile to S19-F with modified spring groove to enable the use of standardized imperial sized springs of the series 100/200/300/400. Elgiloy springs available for extreme chemical resistance.	-200	+260	15	200	Seal SKF Ecoflon 1	Spring 1.4310 ³⁾
				-200	+260	15	200	SKF Ecoflon 1	2.4711 ³⁾
				-200	+260	15	400	SKF Ecoflon 2, 3, 4	1.4310 ³⁾
-200	+260			15	400	SKF Ecoflon 2, 3, 4	2.4711 ³⁾		
-200	+90			15	200	SKF Ecowear 1000	1.4310 ³⁾		
-200	+90			15	200	SKF Ecowear 1000	2.4711 ³⁾		

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Not suitable for mineral oils
³⁾ Spring metal material specification

B

Rod seals

Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material		
		min.	max.					
		°C		m/s	bar	-		
 	S20-R Hydraulic, double-acting Space saving, compact rod seal, fits standard O-Ring housings. Advantage compared to O-Ring: integrated active back-up rings for high pressure, designed with interference fit on outside diameter prevents twisting in dynamic applications. Design optimized for SKF Ecorubber materials.	-30	+100	0,5	700	Seal SKF Ecorubber-1	Back-up rings SKF Ecotal ¹⁾	
		-25	+150	0,5	700	SKF Ecorubber-H	SKF Ecoflon 2	
		-25	+100	0,5	700	SKF Ecorubber-H	SKF Ecotal ¹⁾	
		-25	+150	0,5	700	SKF Ecorubber-H	SKF Ecopaek	
		-20	+200	0,5	700	SKF Ecorubber-2	SKF Ecoflon 2	
		-20	+200	0,5	700	SKF Ecorubber-2	SKF Ecopaek	
 	S21-P Hydraulic, single-acting Symmetric O-ring loaded lip seal for simple standard applications; not recommended for new designs. Sharp edged sealing lip for good sealing effect in high viscosity fluids as well as usage as a wiper seal. Universal usage for rod or piston applications. Design optimized for ECOPUR materials.	-30	+100	0,5	400	Seal ECOPUR	Energizer NBR 70	
		-20	+100	0,5	400	H-ECOPUR	NBR 70	
		-20	+100	0,5	400	S-ECOPUR	NBR 70	
		-50	+100	0,5	400	T-ECOPUR	MVQ 70	
 	S22-P Hydraulic, single-acting Symmetric rod seal with support ring for simple applications to serve repair purpose, not recommended for new designs (profile S01-P preferred). Retainer ring can be designed straight or as an angled ring. Design optimized for ECOPUR materials.	-30	+100	0,5	400	Seal ECOPUR	Support ring SKF Ecotal ¹⁾	
		-35	+110	0,5	400	ECOPUR LD	SKF Ecomid	
		-30	+110	0,5	400	G-ECOPUR	SKF Ecomid	
		-20	+100	0,5	400	H-ECOPUR	SKF Ecotal ¹⁾	
		-20	+100	0,5	400	S-ECOPUR	SKF Ecotal ¹⁾	
		-40	+100	0,5	400	T-ECOPUR	SKF Ecotal ¹⁾	
 	S22-R Hydraulic, single-acting Symmetric rod seal as S22-P, but optimized for SKF Ecorubber materials with increased chemical and thermal properties.	-30	+100	0,5	160	Seal SKF Ecorubber-1	Support ring SKF Ecotal ¹⁾	
		-25	+150	0,5	160	SKF Ecorubber-H	SKF Ecoflon 2	
		-25	+100	0,5	160	SKF Ecorubber-H	SKF Ecotal ¹⁾	
		-20	+200	0,5	160	SKF Ecorubber-2	SKF Ecoflon 2	
		-50	+150	0,5	160	SKF Ecorubber-3 ²⁾	SKF Ecoflon 2	
		-40	+100	0,5	160	SKF Ecorubber-3 ²⁾	SKF Ecotal ¹⁾	
		-10	+200	0,5	160	SKF Ecoflas	SKF Ecoflon 2	
 	S24-P Hydraulic, single-acting Asymmetric O-ring loaded rod seal with additional stabilization lips and a rectangular active back-up ring for larger extrusion gaps or higher pressure ranges. Very good sealing effect over a wide temperature range and good back pumping ability. Design optimized for ECOPUR materials.	-30	+100	0,5	700	Seal ECOPUR	Energizer NBR 70	Back-up ring SKF Ecotal ¹⁾
		-20	+100	0,5	700	H-ECOPUR	NBR 70	SKF Ecotal ¹⁾
		-20	+100	0,5	700	S-ECOPUR	NBR 70	SKF Ecotal ¹⁾
		-50	+100	0,5	700	T-ECOPUR	MVQ 70	SKF Ecotal ¹⁾
 	S2527-F PTFE chevron set, single-acting Optimized for low pressure, unequal angled chevron design results in good contact pressure even in low pressure range. External spring pretension necessary. Mainly used in chemical, pharmaceutical and food industry.	-200	+260	1,5	100	Support ring S25-F SKF Ecoflon 2	Chevron S26-F SKF Ecoflon 1	Pressure ring S27-F SKF Ecoflon 2

1) Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
 2) Not suitable for mineral oils

Rod seals

Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material			
		min.	max.						
		°C		m/s	bar	-			
 	S2931-F PTFE chevron set, single-acting Optimized for high pressure, equal angled chevron design suitable for high pressure range. External spring pretension necessary. Mainly used in chemical, pharmaceutical and food industry.	-200	+260	1,5	315	Support ring S29-F SKF Ecoflon 2	Chevron S30-F SKF Ecoflon 1	Pressure ring S31-F SKF Ecoflon 2	
 	S32-P Hydraulic, single-acting Chevron set, design with extremely flexible sealing lips for difficult operating conditions (bad guiding, large tolerance range). Available as total chevron set as well as intermediate chevrons only (in case of metal male and female adaptors). For further material combinations refer to the seal data sheet	-30	+100	0,5	500	Pressure ring SKF Ecotal ¹⁾	Seal ECOPUR	Support ring SKF Ecorubber-1	
		-30	+100	0,5	500	X-ECOPUR	ECOPUR	SKF Ecotal ¹⁾	
		-30	+100	0,5	500	SKF Ecotal ¹⁾	ECOPUR	SKF Ecotal ¹⁾	
		-30	+110	0,5	500	G-ECOPUR 54D	G-ECOPUR	SKF Ecomid	
		-20	+100	0,5	500	SKF Ecotal ¹⁾	H-ECOPUR	SKF Ecorubber-1	
		-20	+100	0,5	500	X-ECOPUR H	H-ECOPUR	SKF Ecotal ¹⁾	
		-20	+100	0,5	500	SKF Ecotal ¹⁾	H-ECOPUR	SKF Ecotal ¹⁾	
		-20	+100	0,5	500	SKF Ecotal ¹⁾	S-ECOPUR	SKF Ecorubber-1	
		-20	+100	0,5	500	X-ECOPUR S	S-ECOPUR	SKF Ecotal ¹⁾	
		-20	+100	0,5	500	SKF Ecotal ¹⁾	S-ECOPUR	SKF Ecotal ¹⁾	
 	S35-P Hydraulic, double-acting Space saving compact rod seal. Design optimized for ECOPUR materials. Also commonly used as O-ring replacement to prevent twisting of the seal.	-30	+110	0,4	400	ECOPUR			
		-35	+110	0,4	400	ECOPUR LD			
		-30	+110	0,4	400	G-ECOPUR			
		-20	+110	0,4	400	H-ECOPUR			
		-20	+110	0,4	400	S-ECOPUR			
		-50	+100	0,4	400	T-ECOPUR			

1) Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range



Wiper seals


Introduction

Hydraulic cylinders operate in a variety of applications and environmental conditions, including exposure to dust, debris or outside weather conditions. To prevent these contaminants from entering the cylinder assembly and hydraulic or pneumatic system, wiper seals (also known as scrapers, excluders or dust seals) are fitted on the external side of the cylinder head.

Wiper seals prevent the ingress of contamination during static and dynamic conditions. Without a good working wiper seal, particles can get trapped and transported into the cylinder, which can damage the seals as well as other components in the hydraulic system.

In addition to the sealing function, also wiper seals need to keep a thin lubrication film on the piston rod that lubricates themselves and the rod and buffer seals. The lubricant also inhibits corrosion of the piston rod surface. However, the lubrication film must be thin enough so that it returns to the cylinder during the return stroke. This is called back pumping performance of the whole rod sealing system.

Selecting profiles and materials for a wiper seal is a complex task, considering all possible cylinder designs and application criteria. SKF supplies standard wiper seals in many different profiles and in a wide range of materials, series and sizes, which make them appropriate for a wide variety of operating conditions and applications. On the following pages you will find all the available wiper seal designs that are available as machined versions utilizing the SKF SEAL JET system.

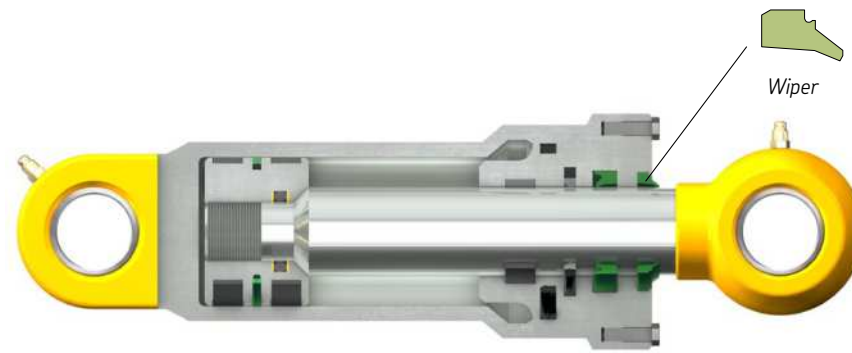

Typical situation for a wiper in a hydraulic cylinder, to protect the internal parts from contamination



Single-acting hydraulic wiper seal A01-A made of SKF Ecorubber-1



Single-acting hydraulic wiper seal with mounting cage A03-A made of ECOPUR and SKF Ecotal




Double-acting hydraulic wiper seal with additional sealing lip A12-B made of H-ECOPUR



Double-acting wiper A27-F with o-ring as energizer made of SKF Ecoflon 3 and NBR 70

Wiper seals

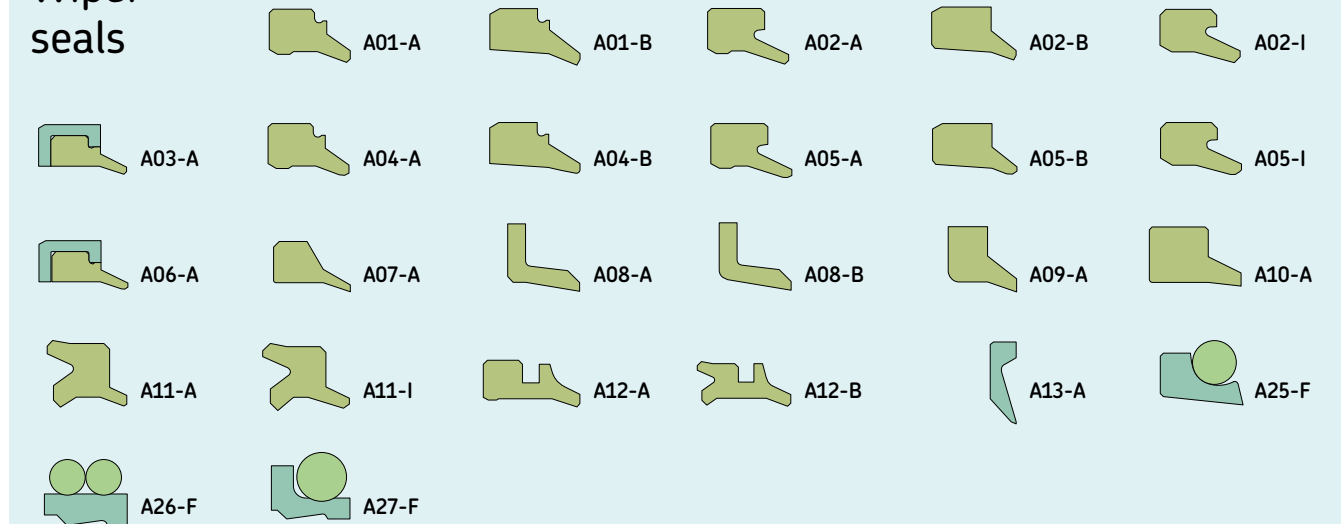

■ Polyurethanes
■ Rubber
■ Thermoplastics

Wiper seal selection guide


Housings according to ISO 6185

Type A Type B Type C Type D

Single-acting design Hydraulic

Single-acting wiper seals for hydraulics are typically used in light to medium duty applications, where the rod sealing system has very good leak tightness and the back pumping effect is not disturbed by the presence of back-up rings. The different variations are typically based on the housing types.

With back support



A01-A A03-A A02-I




A01-B

Single-acting design Pneumatic

Single-acting wiper seals for pneumatics are typically used in light to medium duty applications, where the sealing system requires a separate rod seal. The different variations are typically based on the housing types.

With back support



A04-A A06-A A05-I



A04-B



A25-F

Special design variations

No standard for housings, but still commonly used

Heavy contamination



A02-A



A02-B

Special ANSI housings for angled housings



A12-A A10-A A07-A



A02-B

Single lip



A08-A

A08-B



A05-A



A05-B

Double-acting design Hydraulic & Pneumatic

Double-acting wiper seals for hydraulics are typically used in medium to heavy duty applications, where the rod sealing system could have small leakage and/or the back-pumping effect is disturbed by a back-up ring. Double-acting wiper seals for pneumatics are used as a complete solution for light duty applications, where the function of the rod and the wiper seals can be combined.



A11-I

Heavy contamination



A11-A

O-Ring loaded



A12-B

O-Ring loaded



A26-F



A27-F

Special wiper

Sometimes it is not enough to keep dust, dirt and contamination out of the the sealing system. Therefore scrapers or a rod seal oriented outside the cylinder need to be used as a wiper seal.

Scraper



A13-A

Rod seal



S21-P

Appli- Profile cation	Description	Temperature		Speed max.	Material
		min.	max.		
		°C		m/s	-
 	A01-A Hydraulic, single-acting Single-acting snap-in wiper seal providing a technical accurate closure at the cylinder. With a supporting heel to prevent tilting of the wiper, vents on the inside diameter of the heel prevent the wiper trapping pressure. Designed for housings according to ISO 6195-Type A.	-30	+110	4	ECOPUR
		-35	+110	4	ECOPUR LD
		-30	+110	4	G-ECOPUR
		-20	+110	4	H-ECOPUR
		-20	+110	4	S-ECOPUR
		-50	+100	4	T-ECOPUR
		-30	+115	4	X-ECOPUR
		-30	+110	4	G-ECOPUR 54D
		-20	+115	4	X-ECOPUR H
		-20	+115	4	X-ECOPUR S
		-30	+100	4	SKF Ecorubber-1
		-25	+150	4	SKF Ecorubber-H
		-20	+200	4	SKF Ecorubber-2
-50	+150	4	SKF Ecorubber-3 ¹⁾		
-10	+200	4	SKF Ecoflas		
 	A01-B Hydraulic, single-acting Single-acting snap-in wiper seal providing a technical accurate closure at the cylinder. Designed for housings according to ISO 6195-Type A.	-30	+110	4	ECOPUR
		-35	+110	4	ECOPUR LD
		-30	+110	4	G-ECOPUR
		-20	+110	4	H-ECOPUR
		-20	+110	4	S-ECOPUR
		-50	+100	4	T-ECOPUR
		-30	+115	4	X-ECOPUR
		-30	+110	4	G-ECOPUR 54D
		-20	+115	4	X-ECOPUR H
		-20	+115	4	X-ECOPUR S
		-30	+100	4	SKF Ecorubber-1
		-25	+150	4	SKF Ecorubber-H
		-20	+200	4	SKF Ecorubber-2
-50	+150	4	SKF Ecorubber-3 ¹⁾		
-10	+200	4	SKF Ecoflas		
 	A02-A Hydraulic, single-acting Single-acting snap-in wiper seal for housings with a larger step groove for more stable retention of the wiper seal. With a supporting heel to prevent tilting of the wiper, vents on the inside diameter of the heel prevent the wiper trapping pressure.	-30	+110	4	ECOPUR
		-35	+110	4	ECOPUR LD
		-30	+110	4	G-ECOPUR
		-20	+110	4	H-ECOPUR
		-20	+110	4	S-ECOPUR
		-50	+100	4	T-ECOPUR
		-30	+115	4	X-ECOPUR
		-30	+110	4	G-ECOPUR 54D
		-20	+115	4	X-ECOPUR H
		-20	+115	4	X-ECOPUR S
		-30	+100	4	SKF Ecorubber-1
		-25	+150	4	SKF Ecorubber-H
		-20	+200	4	SKF Ecorubber-2
-50	+150	4	SKF Ecorubber-3 ¹⁾		
-10	+200	4	SKF Ecoflas		
 	A02-B Hydraulic, single-acting Single-acting snap-in wiper seal for housings with a larger step groove for more stable retention of the wiper seal.	-30	+110	4	ECOPUR
		-35	+110	4	ECOPUR LD
		-30	+110	4	G-ECOPUR
		-20	+110	4	H-ECOPUR
		-20	+110	4	S-ECOPUR
		-50	+100	4	T-ECOPUR
		-30	+115	4	X-ECOPUR
		-30	+110	4	G-ECOPUR 54D
		-20	+115	4	X-ECOPUR H
		-20	+115	4	X-ECOPUR S
		-30	+100	4	SKF Ecorubber-1
		-25	+150	4	SKF Ecorubber-H
		-20	+200	4	SKF Ecorubber-2
-50	+150	4	SKF Ecorubber-3 ¹⁾		
-10	+200	4	SKF Ecoflas		

¹⁾ Not suitable for mineral oils

Wipers

Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Material		
		min.	max.				
		°C		m/s	-		
 	A02-I Hydraulic, single-acting Single-acting snap-in wiper seal for housings with a larger step groove for more stable retention of the wiper seal. Designed for housings according to ISO 6195-Type C.	-30	+110	4	ECOPUR		
		-20	+110	4	H-ECOPUR		
		-20	+110	4	S-ECOPUR		
		-50	+100	4	T-ECOPUR		
		-30	+115	4	X-ECOPUR		
		-20	+115	4	X-ECOPUR H		
		-20	+115	4	X-ECOPUR S		
		-30	+100	4	SKF Ecorubber-1		
		-25	+150	4	SKF Ecorubber-H		
		-20	+200	4	SKF Ecorubber-2		
		-50	+150	4	SKF Ecorubber-3 ²⁾		
-10	+200	4	SKF Ecoflas				
 	A03-A Hydraulic, single-acting Single-acting press-in wiper seal providing a technical accurate closure at the cylinder. The use of thermoplastic casings avoids corrosion in the press-fit. Designed for housings according to ISO 6195-Type B.	-30	+80	4	ECOPUR	Seal	Casing
		-20	+80	4	H-ECOPUR	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-20	+80	4	S-ECOPUR	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-50	+80	4	T-ECOPUR	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-30	+80	4	X-ECOPUR	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-20	+80	4	X-ECOPUR H	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-20	+80	4	X-ECOPUR S	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-20	+80	4	X-ECOPUR S	SKF Ecomid	SKF Ecotal ¹⁾
		-30	+80	4	SKF Ecorubber-1	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-25	+80	4	SKF Ecorubber-H	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-25	+150	4	SKF Ecorubber-H	SKF Ecopaek	SKF Ecotal ¹⁾
-20	+200	4	SKF Ecorubber-2	SKF Ecopaek	SKF Ecotal ¹⁾		
-50	+150	4	SKF Ecorubber-3 ²⁾	SKF Ecopaek	SKF Ecotal ¹⁾		
-10	+200	4	SKF Ecoflas	SKF Ecopaek	SKF Ecotal ¹⁾		
 	A04-A Pneumatic, single-acting Single-acting snap-in wiper seal providing a technical accurate closure at the cylinder. With a supporting heel to prevent tilting of the wiper, vents on the inside diameter of the heel prevent the wiper trapping pressure. Designed for housings according to ISO 6195-Type A.	-30	+110	4	ECOPUR		
		-35	+110	4	ECOPUR LD		
		-30	+110	4	G-ECOPUR		
		-20	+110	4	H-ECOPUR		
		-20	+110	4	S-ECOPUR		
		-50	+100	4	T-ECOPUR		
		-30	+115	4	X-ECOPUR		
		-30	+110	4	G-ECOPUR 54D		
		-20	+115	4	X-ECOPUR H		
		-20	+115	4	X-ECOPUR S		
		-30	+100	4	SKF Ecorubber-1		
-25	+150	4	SKF Ecorubber-H				
-20	+200	4	SKF Ecorubber-2				
-50	+150	4	SKF Ecorubber-3 ²⁾				
-10	+200	4	SKF Ecoflas				
 	A04-B Pneumatic, single-acting Single-acting snap-in wiper seal providing a technical accurate closure at the cylinder. Designed for housings according to ISO 6195-Type A.	-30	+110	4	ECOPUR		
		-35	+110	4	ECOPUR LD		
		-30	+110	4	G-ECOPUR		
		-20	+110	4	H-ECOPUR		
		-20	+110	4	S-ECOPUR		
		-50	+100	4	T-ECOPUR		
		-30	+115	4	X-ECOPUR		
		-30	+110	4	G-ECOPUR 54D		
		-20	+115	4	X-ECOPUR H		
		-20	+115	4	X-ECOPUR S		
		-30	+100	4	SKF Ecorubber-1		
-25	+150	4	SKF Ecorubber-H				
-20	+200	4	SKF Ecorubber-2				
-50	+150	4	SKF Ecorubber-3 ²⁾				
-10	+200	4	SKF Ecoflas				

1) Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
 2) Not suitable for mineral oils

Wipers

Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Material		
		min.	max.				
		°C		m/s	-		
 	A05-A Pneumatic, single-acting Single-acting snap-in wiper seal for housings with a larger step groove for more stable retention of the wiper seal. With a supporting heel to prevent tilting of the wiper, vents on the inside diameter of the heel prevent the wiper trapping pressure.	-30	+110	4	ECOPUR		
		-35	+110	4	ECOPUR LD		
		-30	+110	4	G-ECOPUR		
		-20	+110	4	H-ECOPUR		
		-20	+110	4	S-ECOPUR		
		-50	+100	4	T-ECOPUR		
		-30	+115	4	X-ECOPUR		
		-30	+110	4	G-ECOPUR 54D		
		-20	+115	4	X-ECOPUR H		
		-20	+115	4	X-ECOPUR S		
		-30	+100	4	SKF Ecorubber-1		
-25	+150	4	SKF Ecorubber-H				
-20	+200	4	SKF Ecorubber-2				
-50	+150	4	SKF Ecorubber-3 ²⁾				
-10	+200	4	SKF Ecoflas				
 	A05-B Pneumatic, single-acting Single-acting snap-in wiper seal for housings with a larger step groove for more stable retention of the wiper seal.	-30	+110	4	ECOPUR		
		-20	+110	4	H-ECOPUR		
		-20	+110	4	S-ECOPUR		
		-50	+100	4	T-ECOPUR		
		-30	+115	4	X-ECOPUR		
		-20	+115	4	X-ECOPUR H		
		-20	+115	4	X-ECOPUR S		
		-30	+100	4	SKF Ecorubber-1		
		-25	+150	4	SKF Ecorubber-H		
		-20	+200	4	SKF Ecorubber-2		
		-50	+150	4	SKF Ecorubber-3 ²⁾		
-10	+200	4	SKF Ecoflas				
 	A05-I Pneumatic, single-acting Single-acting snap-in wiper seal for housings with a larger step groove for more stable retention of the wiper seal. Designed for housings according to ISO 6195-Type C.	-30	+110	4	ECOPUR		
		-20	+110	4	H-ECOPUR		
		-20	+110	4	S-ECOPUR		
		-50	+100	4	T-ECOPUR		
		-30	+115	4	X-ECOPUR		
		-20	+115	4	X-ECOPUR H		
		-20	+115	4	X-ECOPUR S		
		-30	+100	4	SKF Ecorubber-1		
		-25	+150	4	SKF Ecorubber-H		
		-20	+200	4	SKF Ecorubber-2		
		-50	+150	4	SKF Ecorubber-3 ²⁾		
-10	+200	4	SKF Ecoflas				
 	A06-A Pneumatic, single-acting Single-acting press-in wiper seal providing a technical accurate closure at the cylinder. The use of thermoplastic casings avoids corrosion in the press-fit. Designed for housings according to ISO 6195-Type B.	-30	+80	4	ECOPUR	Seal	Casing
		-20	+80	4	H-ECOPUR	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-20	+80	4	S-ECOPUR	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-50	+80	4	T-ECOPUR	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-30	+80	4	X-ECOPUR	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-20	+80	4	X-ECOPUR H	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-20	+80	4	X-ECOPUR S	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-30	+80	4	SKF Ecorubber-1	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-25	+80	4	SKF Ecorubber-H	SKF Ecotal ¹⁾	SKF Ecotal ¹⁾
		-25	+150	4	SKF Ecorubber-H	SKF Ecopaek	SKF Ecotal ¹⁾
		-20	+200	4	SKF Ecorubber-2	SKF Ecopaek	SKF Ecotal ¹⁾
-50	+150	4	SKF Ecorubber-3 ²⁾	SKF Ecopaek	SKF Ecotal ¹⁾		
-10	+200	4	SKF Ecoflas	SKF Ecopaek	SKF Ecotal ¹⁾		

1) Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
 2) Not suitable for mineral oils

B


Appli- Profile cation	Description	Temperature		Speed max.	Material
		min.	max.		
		°C		m/s	–
 	A07-A Hydraulic, single-acting Single-acting snap-in wiper seal to fit in special angled housings (30° angle).	-30	+110	4	ECOPUR
		-20	+110	4	H-ECOPUR
		-20	+110	4	S-ECOPUR
		-50	+100	4	T-ECOPUR
		-30	+115	4	X-ECOPUR
		-20	+115	4	X-ECOPUR H
		-20	+115	4	X-ECOPUR S
		-30	+100	4	SKF Ecorubber-1
		-25	+150	4	SKF Ecorubber-H
		-20	+200	4	SKF Ecorubber-2
		-50	+150	4	SKF Ecorubber-3 ¹⁾
		-10	+200	4	SKF Ecoflas
		 	A08-A Hydraulic/pneumatic, single-acting Single-acting wiper seal usually fixed in housings with clamping flange. Mainly used for replacement in old hydraulic and pneumatic cylinders or for secondary applications. A08-A with chamfer on the inside edge.	-30	+110
-35	+110			4	ECOPUR LD
-30	+110			4	G-ECOPUR
-20	+110			4	H-ECOPUR
-20	+110			4	S-ECOPUR
-50	+100			4	T-ECOPUR
-30	+115			4	X-ECOPUR
-30	+110			4	G-ECOPUR 54D
-20	+115			4	X-ECOPUR H
-20	+115			4	X-ECOPUR S
-30	+100			4	SKF Ecorubber-1
-25	+150			4	SKF Ecorubber-H
-20	+200			4	SKF Ecorubber-2
-50	+150	4	SKF Ecorubber-3 ¹⁾		
-10	+200	4	SKF Ecoflas		
 	A08-B Hydraulic/pneumatic, single-acting Single-acting wiper seal usually fixed in housings with clamping flange. Mainly used for replacement in old hydraulic and pneumatic cylinders or for secondary applications. A08-B with radius on the inside edge.	-30	+110	4	ECOPUR
		-35	+110	4	ECOPUR LD
		-30	+110	4	G-ECOPUR
		-20	+110	4	H-ECOPUR
		-20	+110	4	S-ECOPUR
		-50	+100	4	T-ECOPUR
		-30	+115	4	X-ECOPUR
		-30	+110	4	G-ECOPUR 54D
		-20	+115	4	X-ECOPUR H
		-20	+115	4	X-ECOPUR S
		-30	+100	4	SKF Ecorubber-1
		-25	+150	4	SKF Ecorubber-H
		-20	+200	4	SKF Ecorubber-2
-50	+150	4	SKF Ecorubber-3 ¹⁾		
-10	+200	4	SKF Ecoflas		
 	A09-A Hydraulic, single-acting Single-acting wiper seal with dimensioning according to common types used in USA. For housings according AN 6231, ANSI/B93.35. Please refer to the seal data sheet for further information.	-30	+110	4	ECOPUR
		-20	+110	4	H-ECOPUR
		-20	+110	4	S-ECOPUR
		-50	+100	4	T-ECOPUR
		-30	+115	4	X-ECOPUR
		-20	+115	4	X-ECOPUR H
		-20	+115	4	X-ECOPUR S
		-30	+100	4	SKF Ecorubber-1
		-25	+150	4	SKF Ecorubber-H
		-20	+200	4	SKF Ecorubber-2
		-50	+150	4	SKF Ecorubber-3 ¹⁾
		-10	+200	4	SKF Ecoflas

¹⁾ Not suitable for mineral oils





Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material		
		min.	max.					
		°C		m/s	bar	–		
 	A10-A Hydraulic, single-acting Single-acting wiper seal with dimensioning according to common types used in USA. Fixed relation between cross-section and height of wiper. For housings according AN 6231, ANSI/B93.35. Please refer to the seal data sheet for further information.	-30	+110	4	–	ECOPUR		
		-20	+110	4	–	H-ECOPUR		
		-20	+110	4	–	S-ECOPUR		
		-50	+100	4	–	T-ECOPUR		
		-30	+115	4	–	X-ECOPUR		
		-20	+115	4	–	X-ECOPUR H		
		-20	+115	4	–	X-ECOPUR S		
		-30	+100	4	–	SKF Ecorubber-1		
		-25	+150	4	–	SKF Ecorubber-H		
		-20	+200	4	–	SKF Ecorubber-2		
		-50	+150	4	–	SKF Ecorubber-3 ¹⁾		
		-10	+200	4	–	SKF Ecoflas		
		 	A11-A Hydraulic/pneumatic, double-acting Double-acting snap-in wiper seal for housings with a larger step groove for more stable retention of the wiper seal. The inside wiping lip reduces the residual oil film.	-30	+110	4	16	ECOPUR
-35	+110			4	16	ECOPUR LD		
-30	+110			4	16	G-ECOPUR		
-20	+110			4	16	H-ECOPUR		
-20	+110			4	16	S-ECOPUR		
-50	+100			4	16	T-ECOPUR		
-30	+100			4	16	SKF Ecorubber-1		
-25	+150			4	16	SKF Ecorubber-H		
-20	+200			4	16	SKF Ecorubber-2		
-50	+150			4	16	SKF Ecorubber-3 ¹⁾		
-10	+200			4	16	SKF Ecoflas		
 	A11-I Hydraulic/pneumatic, double-acting As profile A11-A, special housing design according ISO 6195-Type C			-30	+110	4	16	ECOPUR
				-20	+110	4	16	H-ECOPUR
		-20	+110	4	16	S-ECOPUR		
		-50	+100	4	16	T-ECOPUR		
		-30	+100	4	16	SKF Ecorubber-1		
		-25	+150	4	16	SKF Ecorubber-H		
		-20	+200	4	16	SKF Ecorubber-2		
		-50	+150	4	16	SKF Ecorubber-3 ¹⁾		
		-10	+200	4	16	SKF Ecoflas		
		 	A12-A Hydraulic, single-acting Single-acting snap-in wiper seal with an additional sealing lip on the housing face to prevent against heavy contamination. With a supporting heel to prevent tilting of the wiper, vents on the inside diameter of the heel prevent the wiper trapping pressure.	-30	+110	4	–	ECOPUR
				-35	+110	4	–	ECOPUR LD
				-30	+110	4	–	G-ECOPUR
				-20	+110	4	–	H-ECOPUR
-20	+110			4	–	S-ECOPUR		
-50	+100			4	–	T-ECOPUR		
-30	+115			4	–	X-ECOPUR		
-30	+110			4	–	G-ECOPUR 54D		
-20	+115			4	–	X-ECOPUR H		
-20	+115			4	–	X-ECOPUR S		
 	A12-B Hydraulic, double-acting Double-acting snap-in wiper seal with an additional sealing lip on the housing face to prevent against heavy contamination. The inside wiping lip reduces the residual oil film.			-30	+110	4	16	ECOPUR
				-35	+110	4	16	ECOPUR LD
				-30	+110	4	16	G-ECOPUR
		-20	+110	4	16	H-ECOPUR		
		-20	+110	4	16	S-ECOPUR		
		-50	+100	4	16	T-ECOPUR		

¹⁾ Not suitable for mineral oils


Wipers

 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static

Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material	
		min.	max.				
		°C		m/s	bar	–	
	Hydraulic/pneumatic, single-acting Special scraper ring to wipe off firmly clinging dirt and extremely heavy contamination (mud, tar, ice). Mainly used in combination with an elastomeric wiper, which should be protected.	-70	+115	1	–	X-ECOPUR	
		-70	+115	1	–	X-ECOPUR H	
		-70	+115	1	–	X-ECOPUR S	
		-50	+80	1	–	SKF Ecotal ¹⁾	
		-100	+260	1	–	SKF Ecopaek	
		-200	+90	1	–	SKF Ecowear 1000	
	Hydraulic/pneumatic, single-acting Single-acting O-ring loaded snap-in wiper seal designed for SKF Ecoflon materials to reduce friction and stick-slip effects. The O-ring ensures static sealing and loads the wiping lip, radial misalignments can be compensated and the wiping lip follows the rod. Use X-ECOPUR materials for increased wear resistance and improved installation behaviour. Designed for housings according to ISO 6195-Type D	-30	+100	5	–	Seal X-ECOPUR	Energizer NBR 70
		-20	+100	5	–	X-ECOPUR H	NBR 70
		-20	+100	5	–	X-ECOPUR S	NBR 70
		-20	+200	10	–	SKF Ecoflon 2,3,4	FPM 75
		-30	+100	10	–	SKF Ecoflon 2,3,4	NBR 70
		-55	+90	10	–	SKF Ecowear 1000	MVQ 70
		-30	+90	10	–	SKF Ecowear 1000	NBR 70
	Hydraulic/pneumatic, double-acting Double-acting O-ring loaded snap-in wiper seal designed for SKF Ecoflon materials to reduce friction and stick-slip effects. The O-rings ensure static sealing and load the wiping lip. Radial misalignments can be compensated and the wiping lip follows the rod. The inside wiping lip reduces the residual oil film. Use X-ECOPUR materials for increased wear resistance and improved installation behaviour.	-30	+100	5	16	Seal G-ECOPUR 54D	Energizers NBR 70
		-30	+100	5	16	X-ECOPUR	NBR 70
		-20	+100	5	16	X-ECOPUR H	NBR 70
		-20	+100	5	16	X-ECOPUR S	NBR 70
		-20	+200	10	16	SKF Ecoflon 2,3,4	FPM 75
		-30	+100	10	16	SKF Ecoflon 2,3,4	NBR 70
		-55	+90	10	16	SKF Ecowear 1000	MVQ 70
-30	+90	10	16	SKF Ecowear 1000	NBR 70		
	Hydraulic/pneumatic, double-acting Double-acting O-ring loaded snap-in wiper seal designed for SKF Ecoflon materials to reduce friction and stick-slip effects. The O-ring ensures static sealing and loads the wiping lip. Radial misalignments can be compensated and the wiping lip follows the rod. The inside wiping lip reduces the residual oil film. Use X-ECOPUR materials for increased wear resistance and improved installation behaviour.	-30	+100	5	16	Seal G-ECOPUR 54D	Energizer NBR 70
		-30	+100	5	16	X-ECOPUR	NBR 70
		-20	+100	5	16	X-ECOPUR H	NBR 70
		-20	+100	5	16	X-ECOPUR S	NBR 70
		-20	+200	10	16	SKF Ecoflon 2,3,4	FPM 75
		-30	+100	10	16	SKF Ecoflon 2,3,4	NBR 70
		-55	+90	10	16	SKF Ecowear 1000	MVQ 70
-30	+90	10	16	SKF Ecowear 1000	NBR 70		

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range

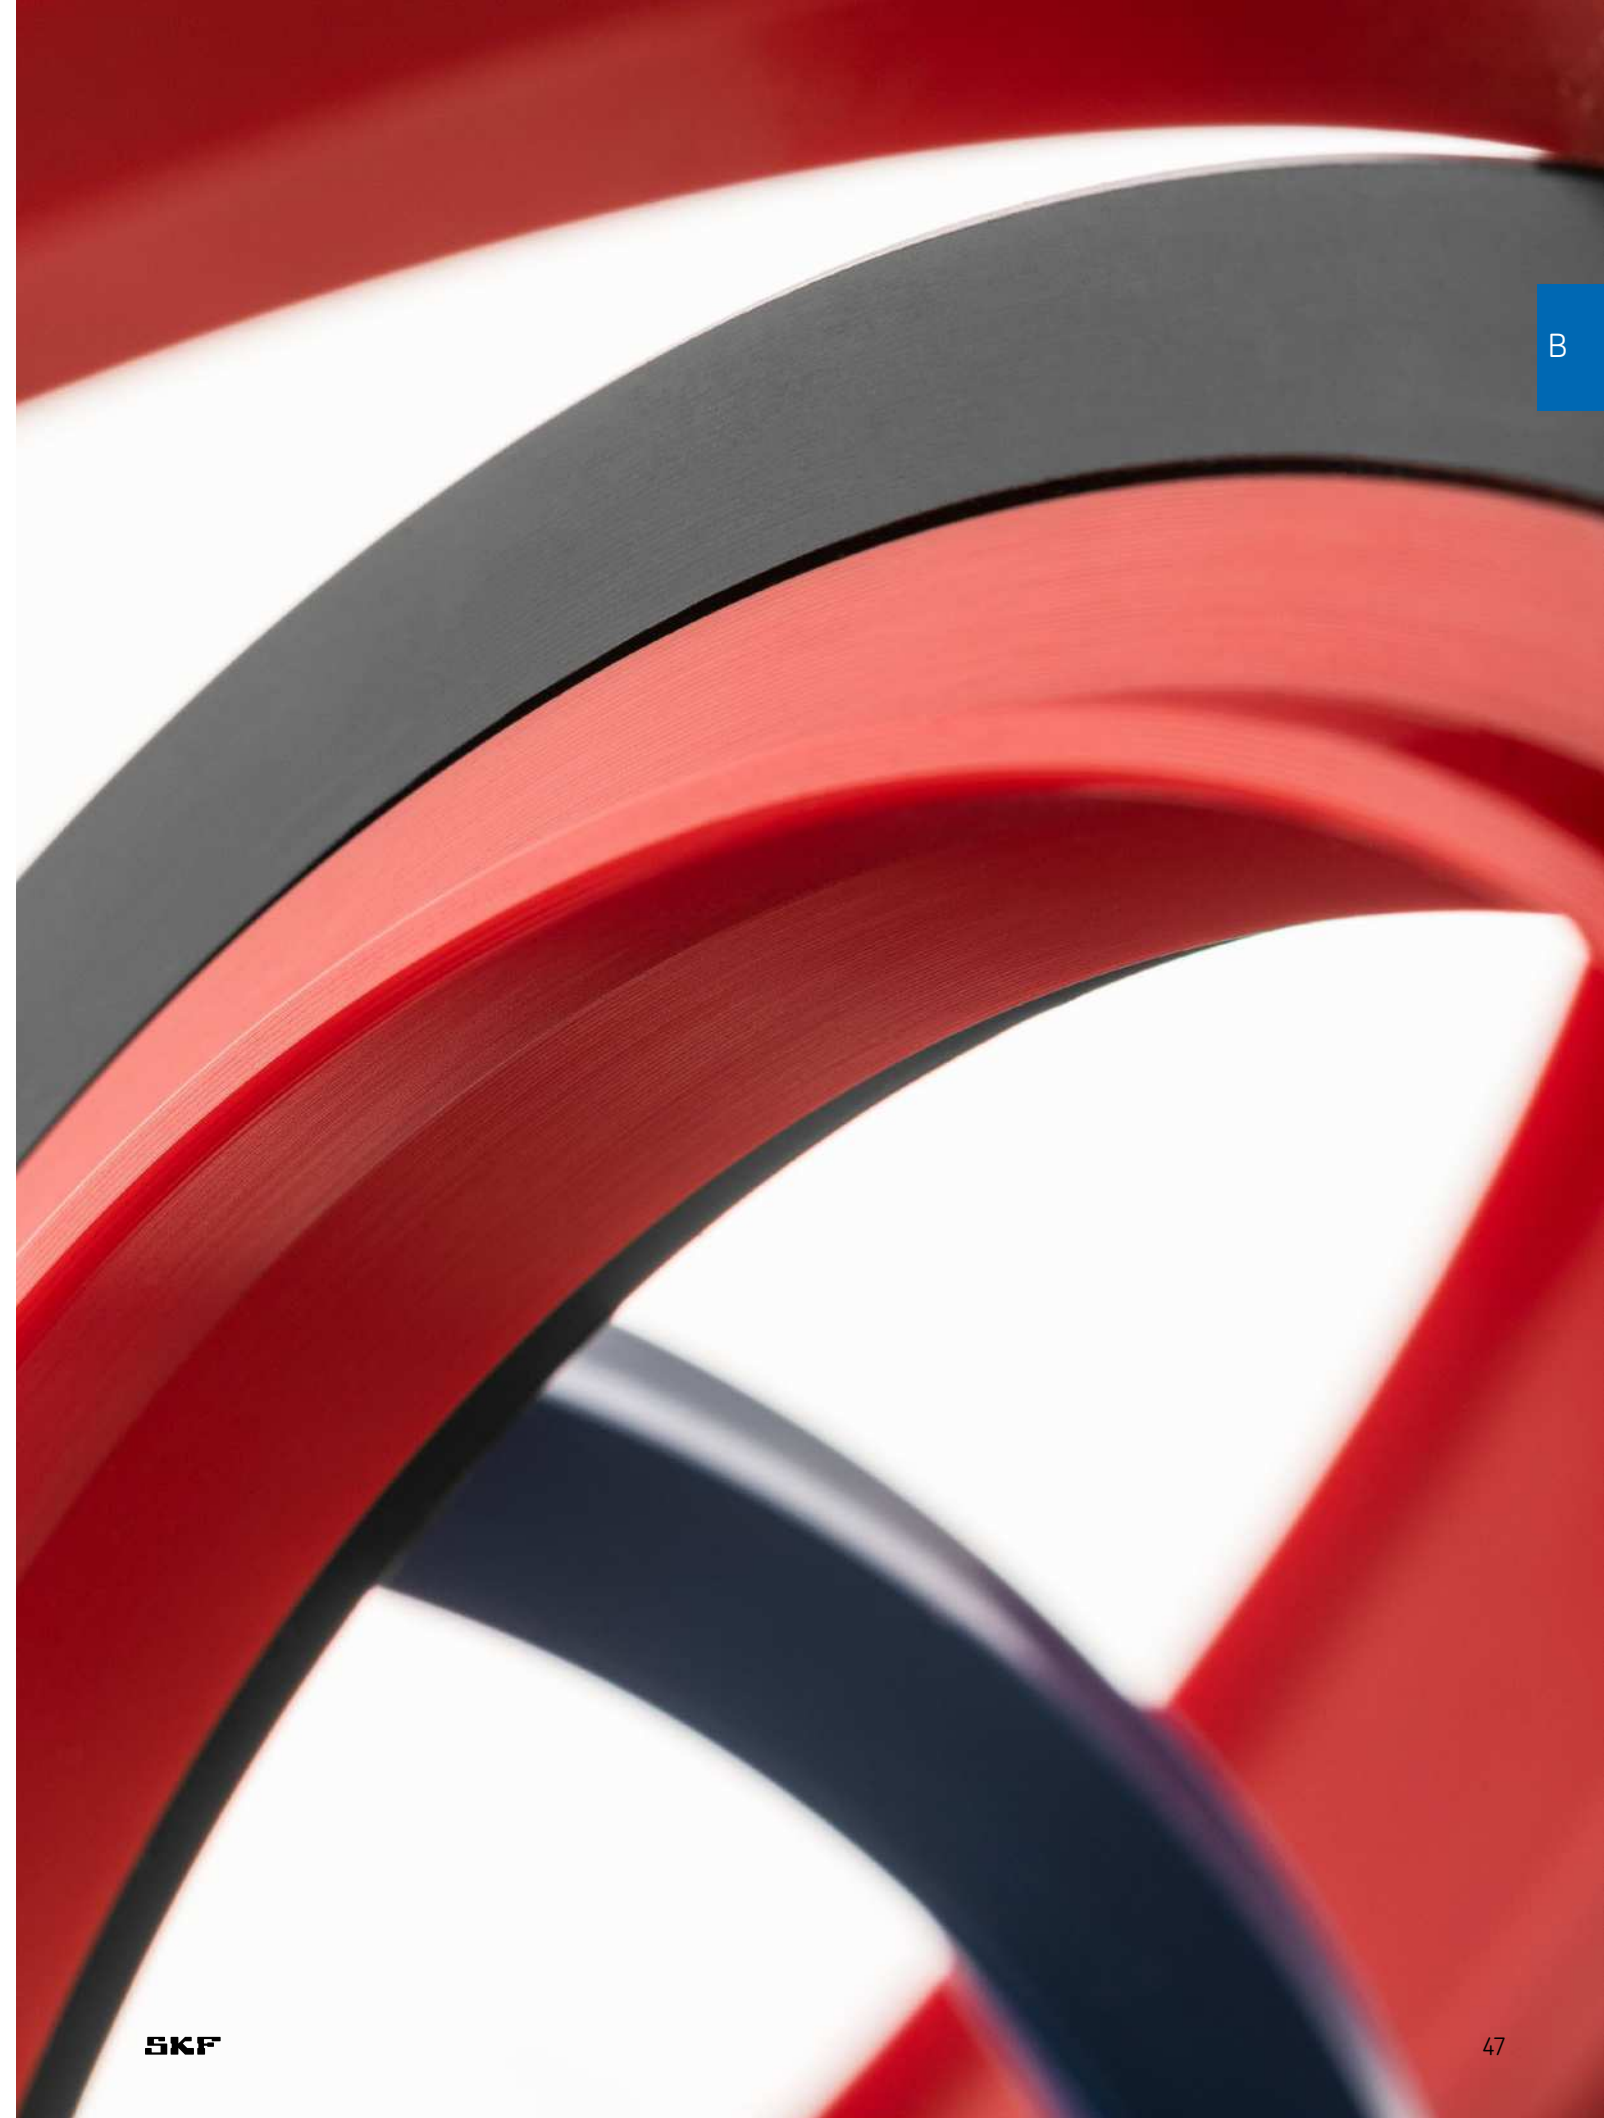

Rotary seals

Introduction

Rotary seals or power transmission seals cover a wider range of radial and axial seals that keep contaminants out and lubricants in the system or separate fluids and – in some cases – also withstand differences in pressure.

These seals are used between rotating and stationary machine components or between two components in relative motion.

To be effective, rotary seals should operate with a minimum of friction and wear, even under unfavourable operating conditions. To meet the requirements of a variety of different applications and operating conditions, seals for rotating machine components are manufactured from many different designs, materials and executions. Each of these designs and material combinations has specific properties, making them suitable for a particular application.

Rotary seals are used to seal against a wide variety of media statically and dynamically. Typical fields of applications include agricultural and construction machinery, wind turbines, ship building and other areas of application in the manufacture of machines and devices.

Some radial shaft seal designs have an auxiliary lip that protects the primary sealing lip from dust and other contaminants. A suitable lubricant in the space between the primary sealing lip and the auxiliary lip can reduce wear and delay corrosion. Contaminants that have passed the auxiliary lip will eventually cause damage in the counterface surface area. A build-up of heat can also occur between the two lips, resulting in premature wear.

On the following pages you will find all the rotary seal designs that are available as machined versions utilizing the SKF SEAL JET system.



Basic function of a rotary shaft seal - keep lubricant in and contamination out of the system and protect the lubricated bearing



Single-acting rotary shaft seal R01-AF2 made of SKF Ecorubber-2



Single-acting rotary shaft seal R02-R with additional sealing lip and retainer ring made of SKF Ecorubber-2 and SKF Ecotal



Axially acting rotary seal (V-ring) R07-P made of H-ECOPUR




Double-acting energizer loaded rotary seal R09-F made of SKF Ecoflon 4 and SKF Ecorubber-2

Rotary seals

■ Polyurethanes
■ Rubber
■ Thermoplastics

Rotary seal selection guide

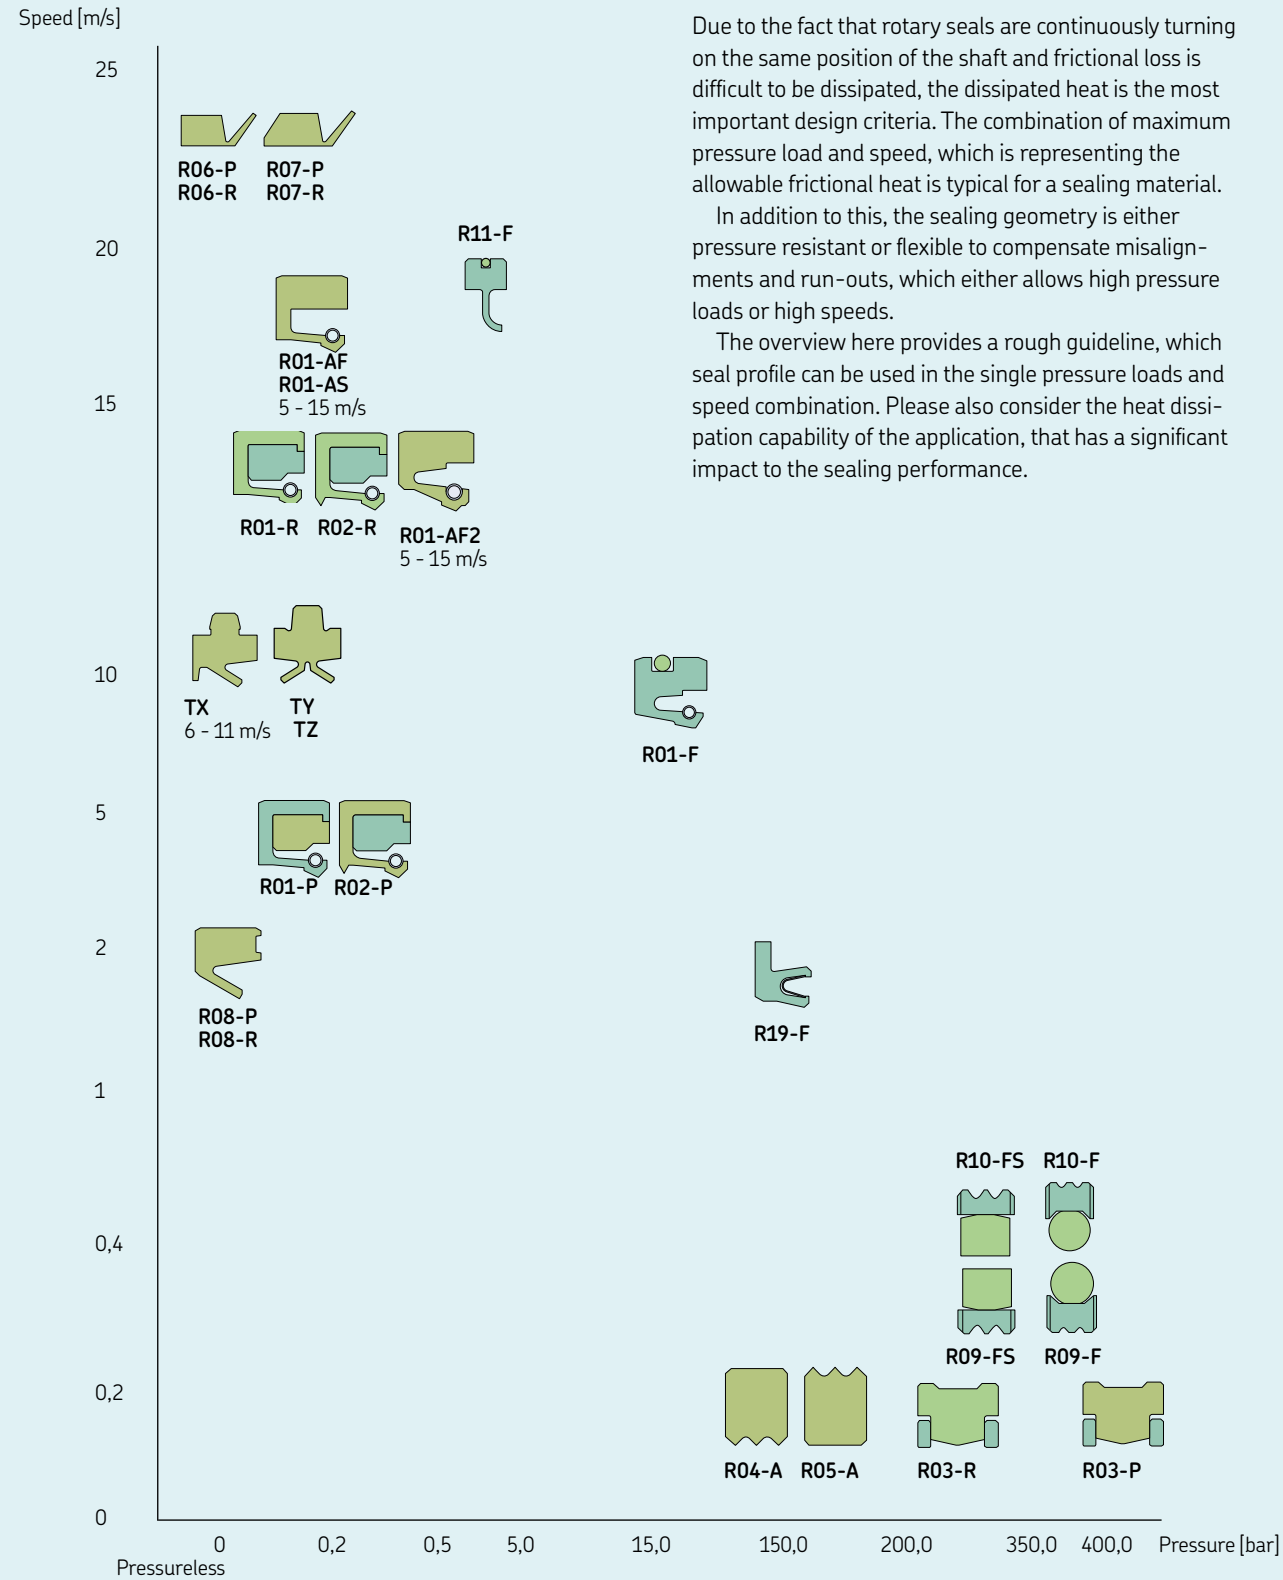

Due to the fact that rotary seals are continuously turning on the same position of the shaft and frictional loss is difficult to be dissipated, the dissipated heat is the most important design criteria. The combination of maximum pressure load and speed, which is representing the allowable frictional heat is typical for a sealing material.




In addition to this, the sealing geometry is either pressure resistant or flexible to compensate misalignments and run-outs, which either allows high pressure loads or high speeds.

The overview here provides a rough guideline, which seal profile can be used in the single pressure loads and speed combination. Please also consider the heat dissipation capability of the application, that has a significant impact to the sealing performance.

Appli- Profile cation	Description	Temperature		Speed max	Pressure max.	Material		
		min.	max.			Seal	Retainer ring	Spring
		°C		m/s	bar	-		
 R01-P 	Single-acting rotary shaft seal Single-acting spring loaded rotary lip seal with a retainer ring for press-fit installation into axially open housings. Design optimized for ECOPUR materials for increased wear resistance. Mainly used for low friction applications as a protecting element for bearings.	+0	+80	5 ³⁾	0,2	Seal	Retainer ring	Spring
		+0	+80	5 ³⁾	0,2	ECOPUR	SKF Ecotal ¹⁾	1.4310 ⁴⁾
		+0	+80	5 ³⁾	0,2	ECOPUR LD	SKF Ecomid	1.4310 ⁴⁾
		+0	+80	5 ³⁾	0,2	G-ECOPUR	SKF Ecomid	1.4310 ⁴⁾
		+0	+80	5 ³⁾	0,2	H-ECOPUR	SKF Ecotal ¹⁾	1.4310 ⁴⁾
						S-ECOPUR	SKF Ecotal ¹⁾	1.4310 ⁴⁾
 R01-R 	Single-acting rotary shaft seal Single-acting spring loaded rotary lip seal with a retainer ring for press-fit installation into axially open housings. Design optimized for SKF Ecorubber materials with increased chemical and thermal resistance. Higher temperatures require metal clamping rings. Mainly used for low friction applications as a protecting element for bearings.	+0	+80	10 ³⁾	0,2	Seal	Retainer ring	Spring
		+0	+80	10 ³⁾	0,2	SKF Ecorubber-1	SKF Ecotal ¹⁾	1.4310 ⁴⁾
		-20	+200	15 ³⁾	0,2	SKF Ecorubber-H	SKF Ecotal ¹⁾	1.4310 ⁴⁾
		+0	+80	10 ³⁾	0,2	SKF Ecorubber-2	Metal	1.4310 ⁴⁾
		-50	+150	10 ³⁾	0,2	SKF Ecorubber-3 ²⁾	SKF Ecotal ¹⁾	1.4310 ⁴⁾
		-10	+200	10 ³⁾	0,2	SKF Ecorubber-3 ²⁾	Metal	1.4310 ⁴⁾
		+0	+80	5 ³⁾	0,2	SKF Ecoflas	Metal	1.4310 ⁴⁾
		-60	+200	5 ³⁾	0,2	SKF Ecosil	SKF Ecotal ¹⁾	1.4310 ⁴⁾
 R01-AF 	Single-acting rotary shaft seal Single-acting spring loaded rotary lip seal for axially open housings with clamping rings. Mainly used for low friction applications as a protecting element for bearings.	-30	+110	5 ³⁾	0,2	Seal	Retainer ring	Spring
		-35	+110	5 ³⁾	0,2	ECOPUR		
		-30	+110	5 ³⁾	0,2	ECOPUR LD		
		-20	+110	5 ³⁾	0,2	G-ECOPUR		
		-20	+110	5 ³⁾	0,2	H-ECOPUR		
		-50	+100	5 ³⁾	0,2	S-ECOPUR		
		-30	+100	10 ³⁾	0,2	T-ECOPUR		
		-25	+150	10 ³⁾	0,2	SKF Ecorubber-1		
		-20	+200	15 ³⁾	0,2	SKF Ecorubber-H		
		-50	+150	10 ³⁾	0,2	SKF Ecorubber-2		
		-10	+200	10 ³⁾	0,2	SKF Ecorubber-3 ²⁾		
		-60	+200	5 ³⁾	0,2	SKF Ecoflas		
						SKF Ecosil		
 R01-AF2 	Single-acting rotary shaft seal Similar to R01-AF, but more robust design compared to R01-AF providing increased pressure resistance but also higher contact force.	-30	110	5	0,5	Seal	Retainer ring	Spring
		-35	110	5	0,5	ECOPUR		
		-30	110	5	0,5	ECOPUR LD		
		-20	110	5	0,5	G-ECOPUR		
		-20	110	5	0,5	H-ECOPUR		
		-50	100	5	0,5	S-ECOPUR		
		-30	100	10	0,5	T-ECOPUR		
		-25	150	10	0,5	SKF Ecorubber-1		
		-20	200	15	0,5	SKF Ecorubber-H		
		-50	150	10	0,5	SKF Ecorubber-2		
-10	200	10	0,5	SKF Ecorubber-3 ²⁾				
				SKF Ecoflas				
				SKF Ecosil				
 R01-AS 	Single-acting rotary shaft seal Single-acting spring loaded rotary lip seal for axially open housings with clamping rings. Mainly used for low friction applications as a protecting element for bearings. Split version for repair purposes.	-30	+110	5 ³⁾	0,2	Seal	Retainer ring	Spring
		-35	+110	5 ³⁾	0,2	ECOPUR		
		-30	+110	5 ³⁾	0,2	ECOPUR LD		
		-20	+110	5 ³⁾	0,2	G-ECOPUR		
		-20	+110	5 ³⁾	0,2	H-ECOPUR		
		-50	+100	5 ³⁾	0,2	S-ECOPUR		
		-30	+100	10 ³⁾	0,2	T-ECOPUR		
		-25	+150	10 ³⁾	0,2	SKF Ecorubber-1		
		-20	+200	15 ³⁾	0,2	SKF Ecorubber-H		
		-50	+150	10 ³⁾	0,2	SKF Ecorubber-2		
		-10	+200	10 ³⁾	0,2	SKF Ecorubber-3 ²⁾		
		-60	+200	5 ³⁾	0,2	SKF Ecoflas		
						SKF Ecosil		

1) Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
 2) Not suitable for mineral oils
 3) Surface speed limit values are depending on heat dissipation ability of the sealing system (shaft diameter, lubrication, ...)
 4) Spring metal material specification






Rotary seals







 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material		
		min.	max.					
		°C		m/s	bar	–		
	Single-acting rotary shaft seal Single-acting spring loaded rotary lip seal for axially open housings with clamping rings. An O-ring is used for static sealing in the housing. Design optimized for SKF Ecoflon materials for increased pressure resistance and higher speeds. Allowable pressure and speed depend on each other, it is not recommended to use maximum values simultaneously.	-20	+200	10 ³⁾	15	Seal SKF Ecoflon 4	Energizer FPM 75	Spring 1.4310 ⁴⁾
		-30	+100	10 ³⁾	15	SKF Ecoflon 4	NBR 70	1.4310 ⁴⁾
	Single-acting rotary shaft seal As profile R01-P, but with additional dust lip to avoid ingress of dust and dirt.	+0	+80	5 ³⁾	0,2	Seal ECOPUR	Retainer ring SKF Ecotal ¹⁾	Spring 1.4310 ⁴⁾
		+0	+80	5 ³⁾	0,2	ECOPUR LD	SKF Ecomid	1.4310 ⁴⁾
		+0	+80	5 ³⁾	0,2	G-ECOPUR	SKF Ecomid	1.4310 ⁴⁾
		+0	+80	5 ³⁾	0,2	H-ECOPUR	SKF Ecotal ¹⁾	1.4310 ⁴⁾
		+0	+80	5 ³⁾	0,2	S-ECOPUR	SKF Ecotal ¹⁾	1.4310 ⁴⁾
	Single-acting rotary shaft seal As profile R01-R, but with additional dust lip to avoid ingress of dust and dirt.	+0	+80	10 ³⁾	0,2	Seal SKF Ecorubber-1	Retainer ring SKF Ecotal ¹⁾	Spring 1.4310 ⁴⁾
		+0	+80	10 ³⁾	0,2	SKF Ecorubber-H	SKF Ecotal ¹⁾	1.4310 ⁴⁾
		-20	+200	15 ³⁾	0,2	SKF Ecorubber-2	Metal	1.4310 ⁴⁾
		+0	+80	10 ³⁾	0,2	SKF Ecorubber-3 ²⁾	SKF Ecotal ¹⁾	1.4310 ⁴⁾
		-50	+150	10 ³⁾	0,2	SKF Ecorubber-3 ²⁾	Metal	1.4310 ⁴⁾
		-10	+200	10 ³⁾	0,2	SKF Ecoflas	Metal	1.4310 ⁴⁾
		+0	+80	5 ³⁾	0,2	SKF Ecosil	SKF Ecotal ¹⁾	1.4310 ⁴⁾
		-60	+200	5 ³⁾	0,2	SKF Ecosil	Metal	1.4310 ⁴⁾
	Double-acting rotary seal Symmetric rotary compact swivel seal with an active back-up ring for larger extrusion gaps or higher pressure ranges. Design optimized for ECOPUR materials for increased wear resistance. Mainly used in rotary joints (mobile hydraulic) to separate different fluid channels.	-30	+100	0,2	400	Seal ECOPUR	Back-up rings SKF Ecotal ¹⁾	
		-20	+100	0,2	400	H-ECOPUR	SKF Ecotal ¹⁾	
		-20	+100	0,2	400	S-ECOPUR	SKF Ecotal ¹⁾	
		-40	+100	0,2	400	T-ECOPUR	SKF Ecotal ¹⁾	
	Double-acting rotary seal Symmetric rotary compact swivel seal with an active back-up ring for larger extrusion gaps or higher pressure ranges. Design optimized for SKF Ecorubber materials with increased chemical and thermal resistance. Mainly used in rotary joints (mobile hydraulic) to separate different fluid channels.	-30	+100	0,2	250	Seal SKF Ecorubber-1	Back-up rings SKF Ecotal ¹⁾	
		-25	+100	0,2	250	SKF Ecorubber-H	SKF Ecotal ¹⁾	
		-20	+200	0,2	250	SKF Ecorubber-2	SKF Ecoflon 2	
		-50	+150	0,2	250	SKF Ecorubber-3 ²⁾	SKF Ecoflon 2	
		-40	+100	0,2	250	SKF Ecorubber-3 ²⁾	SKF Ecotal ¹⁾	
		-10	+200	0,2	250	SKF Ecoflas	SKF Ecopaek	
	Double-acting rotary seal Symmetric rotary compact swivel seal. Mainly used in rotary joints (mobile hydraulic) to separate different fluid channels. Dynamic sealing surface on inside diameter.	-30	+110	0,2	160	ECOPUR		
		-20	+110	0,2	160	H-ECOPUR		
		-20	+110	0,2	160	S-ECOPUR		
		-50	+100	0,2	160	T-ECOPUR		
		-30	+100	0,2	100	SKF Ecorubber-1		
		-25	+150	0,2	100	SKF Ecorubber-H		
		-20	+200	0,2	100	SKF Ecorubber-2		
		-50	+150	0,2	100	SKF Ecorubber-3 ²⁾		
-10	+200	0,2	100	SKF Ecoflas				

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Not suitable for mineral oils
³⁾ Surface speed limit values are depending on heat dissipation ability of the sealing system (shaft diameter, lubrication, ...)
⁴⁾ Spring metal material specification



Rotary seals







 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material
		min.	max.			
		°C		m/s	bar	–
	Double-acting rotary seal Symmetric rotary compact swivel seal. Mainly used in rotary joints (mobile hydraulic) to separate different fluid channels. Dynamic sealing surface on outside diameter.	-30	+110	0,2	160	ECOPUR
		-20	+110	0,2	160	H-ECOPUR
		-20	+110	0,2	160	S-ECOPUR
		-50	+100	0,2	160	T-ECOPUR
		-30	+100	0,2	100	SKF Ecorubber-1
		-25	+150	0,2	100	SKF Ecorubber-H
		-20	+200	0,2	100	SKF Ecorubber-2
		-50	+150	0,2	100	SKF Ecorubber-3 ²⁾
	Axially acting rotary seal Axially acting rotary lip seal installed by interference fit on the shaft. Design optimized for ECOPUR materials with increased wear resistance. Typically rotates with the shaft and acts at higher speeds as a flinger ring (max. speed only valid for rotating seals and requires axial support). Mainly used for contamination exclusion.	-30	+110	25 ¹⁾	–	ECOPUR
		-35	+110	25 ¹⁾	–	ECOPUR LD
		-30	+110	25 ¹⁾	–	G-ECOPUR
		-20	+110	25 ¹⁾	–	H-ECOPUR
		-20	+110	25 ¹⁾	–	S-ECOPUR
		-50	+100	25 ¹⁾	–	T-ECOPUR
		–	–	–	–	–
	Axially acting rotary seal As profile R06-P, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	25 ¹⁾	–	SKF Ecorubber-1
		-25	+150	25 ¹⁾	–	SKF Ecorubber-H
		-20	+200	25 ¹⁾	–	SKF Ecorubber-2
		-50	+150	25 ¹⁾	–	SKF Ecorubber-3 ²⁾
		-10	+200	25 ¹⁾	–	SKF Ecoflas
		–	–	–	–	–
	Axially acting rotary seal Axially acting rotary lip seal installed by interference fit on the shaft. Design optimized for ECOPUR materials with increased wear resistance. Typically rotates with the shaft and acts at higher speeds as a flinger ring (max. speed only valid for rotating seals and requires axial support). Mainly used for contamination exclusion.	-30	+110	25 ¹⁾	–	ECOPUR
		-35	+110	25 ¹⁾	–	ECOPUR LD
		-30	+110	25 ¹⁾	–	G-ECOPUR
		-20	+110	25 ¹⁾	–	H-ECOPUR
		-20	+110	25 ¹⁾	–	S-ECOPUR
		-50	+100	25 ¹⁾	–	T-ECOPUR
	Axially acting rotary seal As profile R07-P, but design optimized for SKF Ecorubber materials with increased chemical and thermal resistance.	-30	+100	25 ¹⁾	–	SKF Ecorubber-1
		-25	+150	25 ¹⁾	–	SKF Ecorubber-H
		-20	+200	25 ¹⁾	–	SKF Ecorubber-2
		-50	+150	25 ¹⁾	–	SKF Ecorubber-3 ²⁾
		-10	+200	25 ¹⁾	–	SKF Ecoflas
		–	–	–	–	–
	Single-acting rotary seal Single-acting spring-less rotary lip seal for axially open housings with clamping plate. Design not optimized to a material class. All materials can be selected, but preload in the application has to be adapted individually. Therefore no pressure range is stated.	-30	+110	–	–	ECOPUR
		-35	+110	–	–	ECOPUR LD
		-30	+110	–	–	G-ECOPUR
		-20	+110	–	–	H-ECOPUR
		-20	+110	–	–	S-ECOPUR
		-50	+100	–	–	T-ECOPUR
		-30	+100	–	–	SKF Ecorubber-1
		-25	+150	–	–	SKF Ecorubber-H
		-20	+200	–	–	SKF Ecorubber-2
		-50	+150	–	–	SKF Ecorubber-3 ²⁾
		-10	+200	–	–	SKF Ecoflas
-60	+200	–	–	SKF Ecosil		

¹⁾ Surface speed limit values are valid for rotating applications
²⁾ Not suitable for mineral oils






Rotary seals






 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material
		min.	max.			
		°C		m/s	bar	–
	Single-acting rotary seal Single-acting spring-less rotary lip seal for axially open housings with clamping plate. Design optimized for ECOPUR materials for increased wear resistance. Mainly used for grease retention or contamination exclusion.	-30	+110	2,5	–	ECOPUR
		-35	+110	2,5	–	ECOPUR LD
		-30	+110	2,5	–	G-ECOPUR
		-20	+110	2,5	–	H-ECOPUR
		-20	+110	2,5	–	S-ECOPUR
	Single-acting rotary seal Single-acting spring-less rotary lip seal for axially open housings with clamping plate. Design optimized for SKF Ecorubber materials for increased chemical and thermal resistance. Mainly used for grease retention or contamination exclusion.	-30	+100	2,5	–	SKF Ecorubber-1
		-25	+150	5	–	SKF Ecorubber-H
		-20	+200	7,5	–	SKF Ecorubber-2
		-50	+150	5	–	SKF Ecorubber-3 ¹⁾
		-10	+200	7,5	–	SKF Ecoflas
		-60	+200	–	–	SKF Ecosil
	Double-acting rotary seal O-ring loaded symmetric slide ring rotary swivel seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. Mainly used in rotary joints (mobile hydraulics and machine tools) to separate different channels. Inside dynamic sealing surface.	-30	+100	0,4	350	Seal SKF Ecoflon 4
		-20	+200	0,4	350	SKF Ecoflon 4
	Double-acting rotary seal As profile R09-F, but with a profile ring energizer instead of the O-ring. For heavy duty applications and non-standard housings.	-30	+100	0,4	350	Seal SKF Ecoflon 4
		-20	+200	0,4	350	SKF Ecoflon 4
	Double-acting rotary seal O-ring loaded symmetric slide ring rotary swivel seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. Mainly used in rotary joints (mobile hydraulics and machine tools) to separate different channels. Outside dynamic sealing surface.	-30	+100	0,4	350	Seal SKF Ecoflon 4
		-20	+200	0,4	350	SKF Ecoflon 4
	Double-acting rotary seal As profile R10-F, but with a profile ring energizer instead of the O-ring. For heavy duty applications and non-standard housings.	-30	+100	0,4	350	Seal SKF Ecoflon 4
		-20	+200	0,4	350	SKF Ecoflon 4

¹⁾ Not suitable for mineral oils

Rotary seals

 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Speed max.	Pressure max.	Material				
		min.	max.							
		°C		m/s	bar	–				
	Single-acting PTFE rotary seal Single-acting spring-less rotary PTFE-lip seal. Design requires SKF Ecoflon materials, because the contact force is created by the memory effect, which tries to set back the bended sealing lip. Allowable pressure and speed depend on each other, it is not recommended to use maximum values simultaneously. For axially open housings with clamping plates. Static sealing either by an O-ring or an elastomeric washer required.	-200	+260	20	5	SKF Ecoflon 2,3,4				
			Single-acting PTFE rotary seal Finger spring loaded rotary seal with integrated clamping flange on the back of the seal. Design optimized for SKF Ecoflon materials to reduce friction and stick-slip effects. Excellent chemical and thermal resistance.	-200	+260	2	150	Seal SKF Ecoflon 1,2,3,4		
									Spring 1.4310 ¹⁾	
					Single-acting PTFE rotary seal Similar profile to R19-F with modified spring groove to enable the use of standardized imperial sized springs of the series 100/200/300/400. Elgiloy springs available for extreme chemical resistance.	-200	+260	2	150	Seal SKF Ecoflon 1, 2, 3, 4
						-200	+260	2	150	SKF Ecoflon 1, 2, 3, 4
	Valve stem seal with PTFE jacket For low friction, rubber energizer automatically increases preload as it senses leakage.	-25	+150	0,5	1 000	Seal SKF Ecorubber-H				
		-25	+100	0,5	500	SKF Ecorubber-H	Casing SKF Ecoflon ²⁾			
		-20	+200	0,5	1 000	SKF Ecorubber-2	SKF Ecoflon ²⁾			
		-20	+100	0,5	500	SKF Ecorubber-2	SKF Ecoflon ²⁾			
	SNL plummer block housing seal; single-acting Single-acting springless shaft seal for grease applications to be mounted into SKF SNL plummer block housings; seals are "pre-cut" at 0° and 180° to possibly break the seal in two halves for easier installation.	-30	+110	6	–	ECOPUR				
		-20	+110	6	–	H-ECOPUR				
		-20	+110	6	–	S-ECOPUR				
		-30	+100	11	–	SKF Ecorubber-1				
		-25	+150	11	–	SKF Ecorubber-H				






¹⁾ Spring metal material specification

²⁾ For all types of SKF Ecoflon, refer to material properties on page 10





³⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range



Rotary seals

 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static

Grey symbols: contact SKF for application limitations

Appli- cation	Profile	Description	Temperature		Speed max.	Pressure max.	Material
			min.	max.			
			°C		m/s	bar	–
		SNL plummer block housing seal; double-acting	-30	+110	11	-	ECOPUR
		Double-acting springless shaft seal for grease applications to be mounted into SKF SNL plummer block housings; seals are "pre-cut" at 0° and 180° to possibly break the seal in two halves for easier installation.	-20	+110	11	-	H-ECOPUR
			-20	+110	11	-	S-ECOPUR
			-30	+100	11	-	SKF-Ecorubber-1
			-25	+150	11	-	SKF Ecorubber-H
		SNL plummer block housing seal; double-acting, split version	-30	+110	11	-	ECOPUR
		Double-acting SNL plummer block housing seal similar to the TY profile; the seals are manufactured in two pieces (back to back) and "pre-cut" at 0° and 180° to possibly break the seal in two halves for easier installation.	-20	+110	11	-	H-ECOPUR
			-20	+110	11	-	S-ECOPUR
			-30	+100	11	-	SKF Ecorubber-1
			-25	+150	11	-	SKF Ecorubber-H




B

Guide rings

Introduction

The function of guide elements or wear rings is to guide the piston and the rod of a hydraulic or pneumatic cylinder, as well as to withstand arising side loads. At the same time, it prevents any metal-to-metal contact, which will damage and score the surfaces and eventually cause seal damage, leakage and component damage.

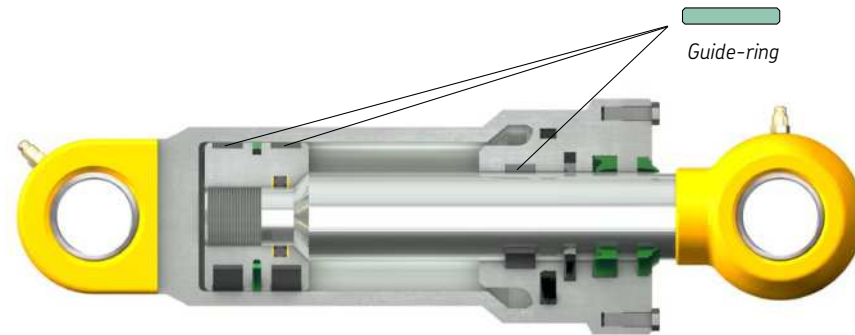


Guide elements used in hydraulic cylinders.



Guide ring F01 made of SKF Ecoflon 2

Guide rings

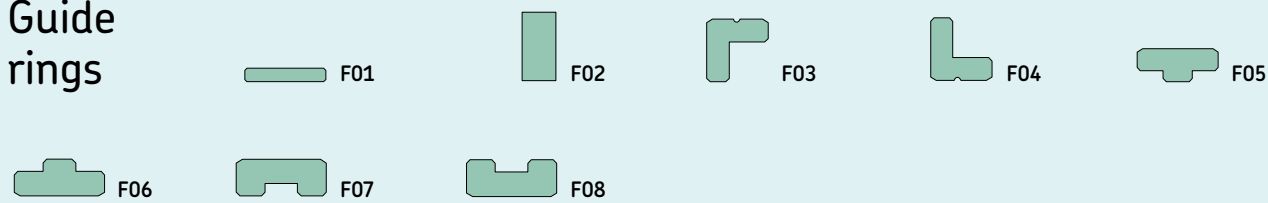

Guide rings






Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static

Grey symbols: contact SKF for application limitations















Appli- cation	Profile	Description	Temperature		Speed max.	Specific load ³⁾ max.	Material
			min.	max.			
			°C		m/s	N/mm ²	-
	F01	Guide ring Most common guide ring for rod or piston application. Used in many standard cylinders, majority of applications require split version for installation into closed housings, non split design available (bushings).	-200	+200	4	3	SKF Ecoflon 2
			-200	+200	5	5	SKF Ecoflon 3
			-50	+100	1	25	SKF Ecotal ¹⁾
			-40	+110	1	25	SKF Ecomid ¹⁾
			-40	+120	1	90	SKF Ecotex ²⁾
	F02	Guide ring For rod or piston application, split and non split design available. Not only used as guide ring, also as plain washer or spacer.	-200	+200	4	3	SKF Ecoflon 2
			-200	+200	5	5	SKF Ecoflon 3
			-50	+100	1	25	SKF Ecotal ¹⁾
			-40	+110	1	25	SKF Ecomid ¹⁾
	F03	Guide ring For piston application. Angled design combines guide ring and back-up ring functions and the grooves provide improved lubrication. Split and non split design available.	-200	+200	4	3	SKF Ecoflon 2
			-200	+200	5	5	SKF Ecoflon 3
			-50	+100	1	25	SKF Ecotal ¹⁾
			-40	+110	1	25	SKF Ecomid ¹⁾
	F04	Guide ring Same as profile F03 but for rod application.	-200	+200	4	3	SKF Ecoflon 2
			-200	+200	5	5	SKF Ecoflon 3
			-50	+100	1	25	SKF Ecotal ¹⁾
			-40	+110	1	25	SKF Ecomid ¹⁾
	F05	Guide ring With integrated collar on inside diameter, for piston application. Split and non split design available.	-200	+200	4	3	SKF Ecoflon 2
			-200	+200	5	5	SKF Ecoflon 3
			-50	+100	1	25	SKF Ecotal ¹⁾
			-40	+110	1	25	SKF Ecomid ¹⁾
	F06	Guide ring With integrated collar on outside diameter, for rod application. Split and non split design available.	-200	+200	4	3	SKF Ecoflon 2
			-200	+200	5	5	SKF Ecoflon 3
			-50	+100	1	25	SKF Ecotal ¹⁾
			-40	+110	1	25	SKF Ecomid ¹⁾

¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range
²⁾ Special fabric reinforced material, available as a guide tape only
³⁾ Depending on temperature and allowable compression. Contact SKF for more information

Guide rings

 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static

Grey symbols: contact SKF for application limitations

Appli- cation	Profile	Description	Temperature		Speed max.	Specific load ²⁾ max.	Material
			min.	max.			
			°C		m/s	N/mm ²	–
     	F07 	Guide ring With groove on inside diameter, for piston application. Split and non split design available.	-200	+200	4	3	SKF Ecoflon 2
			-200	+200	5	5	SKF Ecoflon 3
			-50	+100	1	25	SKF Ecotal ¹⁾
			-40	+110	1	25	SKF Ecomid ¹⁾
     	F08 	Guide ring With groove on outside diameter, for rod application. Split and non split design available.	-200	+200	4	3	SKF Ecoflon 2
			-200	+200	5	5	SKF Ecoflon 3
			-50	+100	1	25	SKF Ecotal ¹⁾
			-40	+110	1	25	SKF Ecomid ¹⁾




¹⁾ Size limitation D: Up to 260 mm SKF Ecotal, from 260 - 400 mm SKF Ecotal or SKF Ecomid and above 400 mm SKF Ecomid; please refer to the seal data sheet regarding temperature range

²⁾ Depending on temperature and allowable compression. Contact SKF for more information


Back-up rings

Introduction

Back-up rings prevent gap extrusion of the seal or a static O-Ring. The standard machined hydraulic seals normally have active back-up rings, which allow the back-up ring to adjust on the dynamic counter surface to optimize the extrusion resistance.

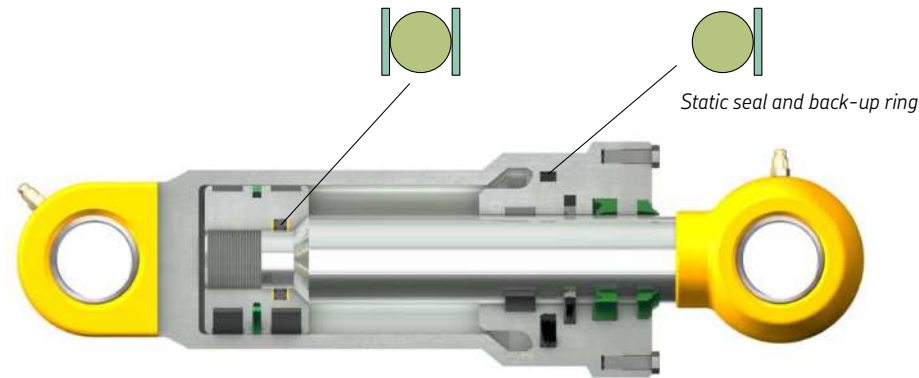

Cylinder with static seals and back-up rings

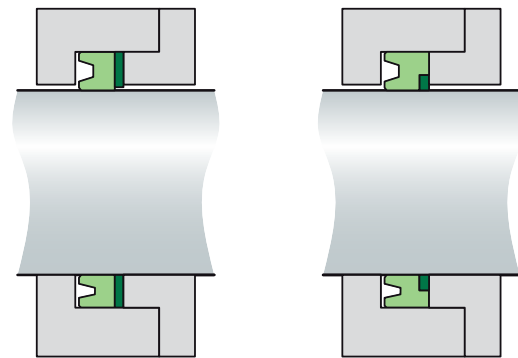

Inactive back-up ring (left) vs. active back-up ring (right).

Back-up rings



ST08




ST09



ST10



ST11



ST12



ST13

Back-up rings






Linear moving
 Rotating
 Oscillating
 Spiral moving
 Static

 Grey symbols: contact SKF for application limitations






Appli- Profile cation	Description	Temperature		Material
		min.	max.	
		°C		-
	Back-up ring Common inactive back-up ring, mainly used with O-rings to avoid gap extrusion. Split and non split design available.	-70	+110	ECOPUR ECOPUR LD G-ECOPUR H-ECOPUR S-ECOPUR T-ECOPUR X-ECOPUR G-ECOPUR 54D X-ECOPUR H X-ECOPUR S SKF Ecoflon 1 SKF Ecoflon 2 SKF Ecotal ¹⁾ SKF Ecomid ²⁾ SKF Ecopaek
	Back-up ring Common inactive back-up ring especially for O-rings to avoid gap extrusion. Split and non split design available.	-70	+110	ECOPUR ECOPUR LD G-ECOPUR H-ECOPUR S-ECOPUR T-ECOPUR X-ECOPUR G-ECOPUR 54D X-ECOPUR H X-ECOPUR S SKF Ecoflon 1 SKF Ecoflon 2 SKF Ecotal ¹⁾ SKF Ecomid ²⁾ SKF Ecopaek
	Back-up ring Standard active back-up ring for piston seal type PD. Normally already included in PD-type seal profiles, designed for automatic pressure activation. Split and non split design available.	-200	+200	SKF Ecoflon 2 SKF Ecotal ¹⁾ SKF Ecomid ²⁾ SKF Ecopaek
	Back-up ring Standard active back-up ring for rod seal type PD. Normally already included in PD-type seal profiles, designed for automatic pressure activation. Split and non split design available.	-200	+200	SKF Ecoflon 2 SKF Ecotal ¹⁾ SKF Ecomid ²⁾ SKF Ecopaek
	Back-up ring Triangular back-up ring for rod applications, fits in special shaped housings (see seal data sheets). Also used as integrated active back-up ring in special high pressure or low friction seal profiles. Split and non split design available.	-200	+200	SKF Ecoflon 2 SKF Ecotal ¹⁾ SKF Ecomid ²⁾ SKF Ecopaek

¹⁾ Up to 400 mm
²⁾ Above 260 mm

Back-up rings

 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static

Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Material
		min.	max.	
		°C		-
 ST13    	Back-up ring Triangular back-up ring for piston applications, fits in special shaped housings (see seal data sheets). Also used as integrated active back-up ring in special high pressure or low friction seal profiles. Split and non split design available.	-200 -50 -40 -100	+200 +100 +110 +260	SKF Ecoflon 2 SKF Ecotal ¹⁾ SKF Ecomid ²⁾ SKF Ecopaek

¹⁾ Up to 400 mm
²⁾ Above 260 mm


Static seals

Introduction

Besides the conventional O-rings and square rings, SKF offers a standard range of specialized seals for static applications. Most of profiles listed below fit in standard O-ring grooves (housings) and can be substituted easily without any rework of housing dimensions.

Those seals are mainly designed for increased stability in the housing to avoid twisting during the mounting process, which can occur when using simple O-rings. Twisting of O-rings might damage the seal during installation already before they are to be used as sealing element.

The illustration shows different static seals used in hydraulic cylinders. O-rings might do the job for standard applications. For heavy duty applications additional back-up rings might be applicable. For tricky situations regarding mounting also S35 resp. K35 seals might be the best solution to avoid twisting.

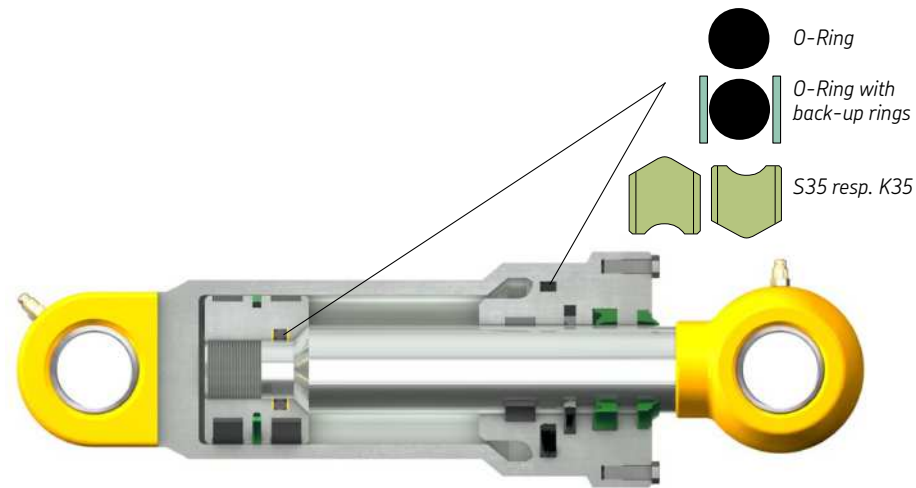

Typical situation for different static seals used in hydraulic cylinders.
















K35-P in ECOPUR

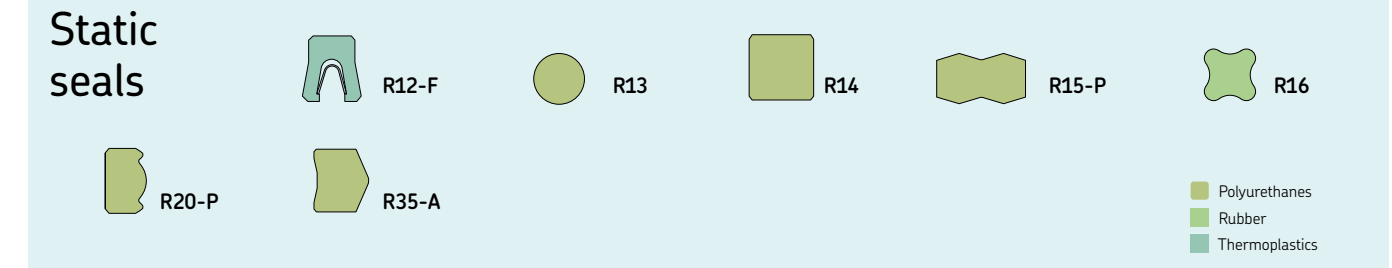

S35-P in T-ECOPUR






Static seals







Profile	Description
  	Universal type Most common and simple seal profiles with proven reliability in a wide range of different applications and industries.
  	Inside sealing type Interference fit on outside diameter ¹⁾ provides stable fit in the housing and reliable performance at all pressures.
  	Outside sealing type Interference fit on inside diameter ¹⁾ provides stable fit in the housing and reliable performance at all pressures.
  	Axial sealing type Robust profiles mainly used as flange seals, inside or outside pressurization possible. Direction of pressurization (from inside or outside) must be indicated when ordering the seal.

¹⁾ R15-P is a symmetric profile and has no defined interference fit to inner or outer diameter.






Static seals




 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Pressure max.	Material
		min.	max.		
		°C		bar	–
 R12-F Single-acting PTFE flange seal Fingerspring activated flange seal, excellent chemical and thermal resistance, mainly used on flanges, fittings or pivoting joints in chemical industry. Pressure from the inside.		-200	+260	300	Seal SKF Ecoflon 1,2,3,4 Spring 1.4310 ²⁾
 R13 O-ring Simple O-ring mainly used for static applications and energizing functions (e.g. for slide ring seals). In case of dynamic pressurisation or minor dynamic movements we recommend to use S20-R or K20-R resp. S35-P or K35-P or R35-A.		-30	+110	600	ECOPUR ECOPUR LD G-ECOPUR H-ECOPUR S-ECOPUR T-ECOPUR SKF Ecorubber-1 SKF Ecorubber-H SKF Ecorubber-2 SKF Ecorubber-3 ¹⁾ SKF Ecoflas SKF Ecosil SKF Ecoflon 1
 R14 Square ring Simple square ring mainly used for static applications or as gasket. Axial or radial, inside or outside sealing possible. Design not optimized to a material class. All materials can be selected, but preload in the application has to be adapted individually. Therefore no pressure range is stated. Can also be used as a spacer ring. Please choose ST08 for back-up rings and F01 for guide rings to ensure correct manufacturing tolerances, cutting gaps and chamfers.		-30	+110	–	ECOPUR ECOPUR LD ECOPUR H-ECOPUR S-ECOPUR T-ECOPUR X-ECOPUR G-ECOPUR 54D X-ECOPUR H X-ECOPUR S SKF Ecorubber-1 SKF Ecorubber-H SKF Ecorubber-2 SKF Ecorubber-3 ¹⁾ SKF Ecoflas SKF Ecosil SKF Ecoflon 1 SKF Ecoflon 2 SKF Ecoflon 3 SKF Ecoflon 4 SKF Ecotal SKF Ecomid SKF Ecopaek SKF Ecowear 1000
 R15-P Double-acting static seal For static applications as an O-ring replacement to avoid twisting in the housing, simple installation and improved extrusion resistance.		-30	+110	400	ECOPUR ECOPUR LD G-ECOPUR H-ECOPUR S-ECOPUR T-ECOPUR

¹⁾ Not suitable for mineral oils
²⁾ Spring metal material specification

Static seals

 Linear moving
  Rotating
  Oscillating
  Spiral moving
  Static
 Grey symbols: contact SKF for application limitations

Appli- Profile cation	Description	Temperature		Pressure max.	Material
		min.	max.		
		°C		bar	–
 R16 Double-acting static seal For static and dynamic applications as an O-ring replacement in radial and axial grooves. The design enables retention of lubricant.		-30	+110	400	ECOPUR ECOPUR G-ECOPUR H-ECOPUR S-ECOPUR T-ECOPUR SKF Ecorubber-1 SKF Ecorubber-H SKF Ecorubber-2 SKF Ecorubber-3 ¹⁾ SKF Ecoflas
 R20-P Single-acting flange seal Flange seal for static applications, suitable for high pressure range. Direction of pressurization (from inside or outside) must be indicated when ordering the seal.		-30	+110	800	ECOPUR ECOPUR LD G-ECOPUR H-ECOPUR S-ECOPUR T-ECOPUR
 R35-A Single-acting flange seal Flange seal for static applications, suitable for high pressure range. Direction of pressurization (from inside or outside) must be indicated when ordering the seal.		-30	+110	800	ECOPUR ECOPUR LD G-ECOPUR H-ECOPUR S-ECOPUR T-ECOPUR SKF Ecorubber-1 SKF Ecorubber-H SKF Ecorubber-2 SKF Ecorubber-3 ¹⁾ SKF Ecoflas SKF Ecosil


¹⁾ Not suitable for mineral oils

Piston seal housing details and recommendations

The table on the right shows an example of standard housing measurements for piston seals.

Please note that SKF can produce these profiles to application specific requirements or any non-standard housing.

Suggested standard housing dimension

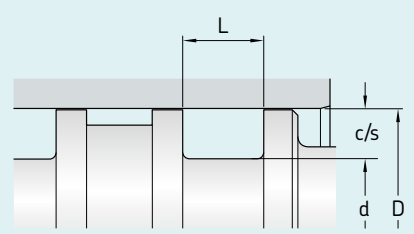

Surface properties
 R_{tmax} R_a

μm

Sliding surface for
 TPU/rubber seals $\leq 2,5$ $\leq 0,05-0,2$
 PTFE seals ≤ 2 $\leq 0,05-0,2$


Indicated dimensions are required to process an order
 D bore diameter
 d, d_1 ²⁾ housing groove diameter
 L, L_1 ²⁾ housing groove length
 c/s cross section

Groove bottom $\leq 6,3$ $\leq 1,6$
 Groove face ≤ 15 ≤ 3

Bearing area T_p 50–95%¹⁾

Seal housing tolerances
 Depending on the seal profiles

¹⁾ at a cutting depth of 0,5 R_z based on $C_{ref} = 0\%$
²⁾ d_1 and L_1 only valid for K09, please refer to the image in the related section

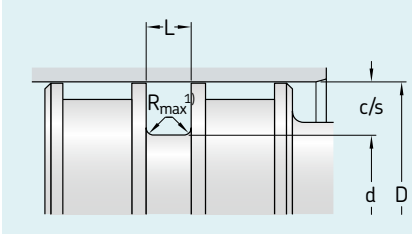

K08-D K08-P K08-E

Main function
 Single/double-acting piston seals
 Energizer loaded PTFE (TPU) seals

Main applications
 Standard cylinders for positioning functions, mobile hydraulics, etc.



Advantages
 Low friction
 No stick-slip
 Excellent resistance against pressure shocks

Standard materials
 SKF Ecoflon/NBR
 SKF Ecoflon/FKM
 X-ECOPUR/NBR

K08-ES K08-DS

Bore diameter		Housing groove diameter	Housing groove length	Cross section	
D H9 over	incl.	d h10	L +0,2	c/s	
mm		mm	mm	mm	
10	15	D – 4,9	2,2	2,45	
15	40	D – 7,5	3,2	3,75	
40	80	D – 11	4,2	5,5	
<hr/>					
80	133	D – 15,5	6,3	7,75	
133	330	D – 21	8,1	10,5	
330	670	D – 24,5	8,1	12,25	
<hr/>					
670	1 000	D – 28	9,5	14	
1 000		D – 38	13,8	19	
<hr/>					
mm		mm	mm	mm	
15	50	D – 10	5	5	
50	60	D – 15	7,5	7,5	
60	200	D – 20	10	10	
<hr/>					
200	300	D – 25	12,5	12,5	
300	530	D – 30	15	15	
530	680	D – 35	17,5	17,5	
<hr/>					
680	1500	D – 40	20	20	

¹⁾ For details regarding R_{max} please refer to the related seal data sheet

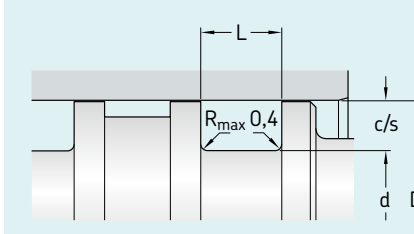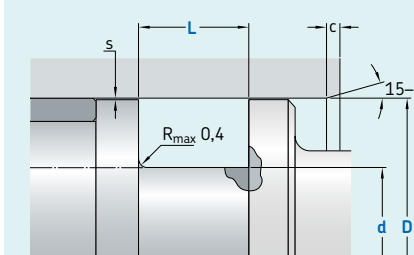K01-P K01-PE K01-R K01-RE K02-P K02-PD K02-R K02-RD K03-F¹⁾ K03-P K04-P K04-PD K05-P K05-R K06-P K06-R K07-F¹⁾ K07-P K21-P K22-P K22-R

Main function
 Single-acting piston seals lip type (U-cup) seals compact seals



Main applications
 Support and retaining cylinders
 Standard cylinders

Advantages
 Stable fit in the housing
 Ultimate sealing effect
 Wide temperature range

Standard materials
 ECOPUR grades
 SKF Ecorubber grades
 SKF Ecoflon grades

Bore diameter		Housing groove diameter	Housing groove length	Cross section	
D H9 over	incl.	d h10	L +0,2	c/s	
mm		mm	mm	mm	
25	25	D – 8	6	4	
50	50	D – 10	7	5	
50	75	D – 12	8	6	
<hr/>					
75	150	D – 15	10	7,5	
150	300	D – 20	12	10	
300	500	D – 25	18	12,5	
<hr/>					
500	600 ¹⁾	D – 30	20	15	

¹⁾ K03-F and K07-F are PTFE seals and require an accessible housing. Please refer to the seal data sheet for more details.

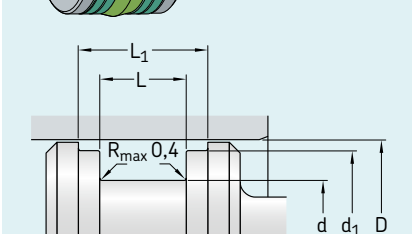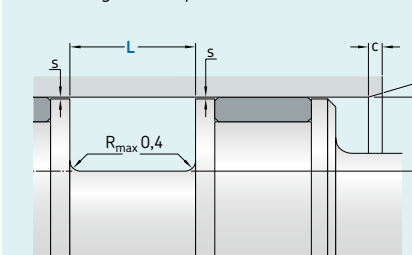K09-N K09-D K09-H K09-F K23-N K23-D K23-H K23-F

Main function
 Double-acting piston seal
 Compact type

Main applications
 Support and retaining cylinders
 Standard cylinders

Advantages
 Excellent static and dynamic sealing capacity, integrated back-up rings


Standard materials
 ECOPUR / SKF Ecorubber/
 SKF Ecotal

Bore diameter		Housing groove diameter		Housing groove length	
D H9 over	incl.	d h9	d ₁ h8	L +0,2	L ₁
mm		mm		mm	
20	50	D – 10	D – 3	12,5	20,5
50	80	D – 15	D – 4	20	28
80	150	D – 20	D – 5	25	36
<hr/>					
150	400	D – 25	D – 6	32	46
400	650 ¹⁾	D – 30	D – 8	36	50

¹⁾ Not all profiles available above 600 mm

Rod seal housing details and recommendations

Suggested standard housing dimension

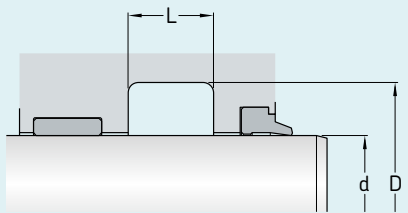



Indicated dimensions are required to process an order
 D housing groove diameter
 d rod diameter
 L housing groove length
 c/s cross section

Surface properties
 R_{tmax} R_a

	R_{tmax}	R_a
μm		
Sliding surface for		
TPU/rubber seals	$\leq 2,5$	$\leq 0,05-0,3$
PTFE seals	≤ 2	$\leq 0,05-0,2$
Groove bottom	$\leq 6,3$	$\leq 1,6$
Groove face	≤ 15	≤ 3
Bearing area T_p	50-95% ¹⁾	

Seal housing tolerances
 D H10
 d f8
 L +0,2

¹⁾ at a cutting depth of 0,5 R_z based on $C_{ref} = 0\%$

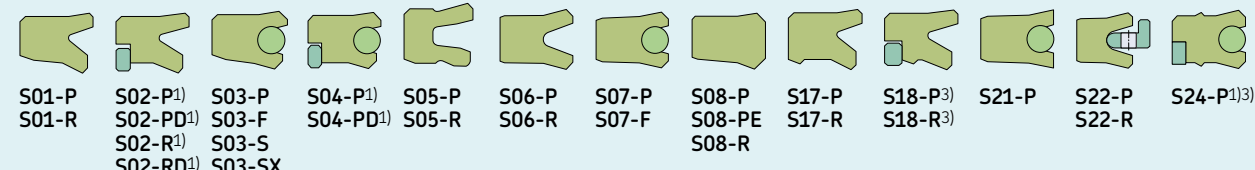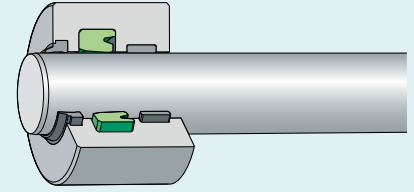Main function
 Single-acting rod seals
 Lip type (U-cup) seals
 Compact seals


Main applications
 Standard cylinders
 Light and standard hydraulic applications

Advantages
 Stable fit in the housing
 Ultimate sealing effect
 Wide temperature range
 Good backpumping ability


Standard materials
 ECOPUR grades
 SKF Ecorubber grades
 SKF Ecoflon grades

Rod diameter		Housing groove diameter	Housing groove length	Cross section
d	incl.	D	L ³⁾	c/s
mm		mm	mm	mm
25	25 ¹⁾	d + 8	6,3 (8,0) ³⁾	4
50	50	d + 10	8 (9) ³⁾	5
50	150	d + 15	10 (14) ³⁾	7,5
150	300	d + 20	14 (17) ³⁾	10
300	500	d + 25	17 (20) ³⁾	12,5
500	700 ²⁾	d + 30	25	15
700	1 000 ²⁾	d + 40	32	20
1 000		d + 40	32	20

Drawing for the PTFE seal profiles S03-F, S03-S, S03-SX and S07-F

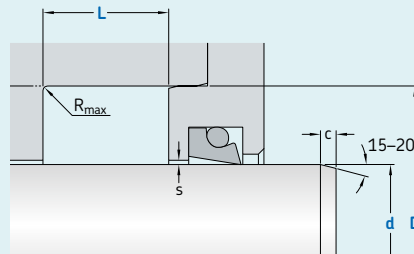

¹⁾ Restrictions in minimum diameter vary. Please see details in the seal data sheets. Please consult our technical department for exact limitations.
²⁾ Not all profiles available above 600 mm.
³⁾ Higher values for L (in brackets) required for S18-P, S18-R and S24-P due to back-up ring.

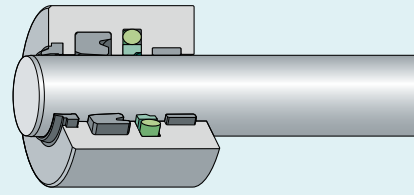


S02-S **S09-E** **S09-P** **S09-D**
Main function
 Single/double-acting buffer seals,
 O-ring activated PTFE (TPU) seals.

Main applications
 Buffer or tandem seals for
 Mobile hydraulics
 Heavy duty hydraulics

Advantages
 Excellent resistance against pressure
 shocks
 Long lifetime



Standard materials
 S02: ECOPUR
 S09: SKF Ecoflon/NBR or SKF Ecoflon/
 FKM, X-ECOPUR/NBR



S09-ES **S09-DS**

Rod diameter		Housing groove diameter D	Housing groove length L	Cross section c/s
d over	incl.			
mm		mm	mm	mm
8 ¹⁾	8 ¹⁾	d + 4,9	2,2	2,45
8 (10) ²⁾	19	d + 7,3	3,2	3,65
19	38	d + 10,7	4,2	5,35
38	200	d + 15,1	6,3	7,55
200	256	d + 20,5	8,1	10,25
256	650 ³⁾	d + 24	8,1	12
650	1 000 ³⁾	d + 27,3	9,5	13,65
1 000		d + 38	13,8	13,65
mm		mm	mm	mm
50	50	d+10	5	5
50	60	d+15	7,5	7,5
60	200	d+20	10	10
200	300	d+25	12,5	12,5
300	530	d+30	15	15
530	680	d+35	17,5	17,5
680	1500	d+40	20	20

¹⁾ Not valid for S02-S.
²⁾ Higher value in brackets (10) only valid for S02-S.
³⁾ Not all profiles available above 600 mm
⁴⁾ For details regarding R_{max} please refer to the related seal data sheet

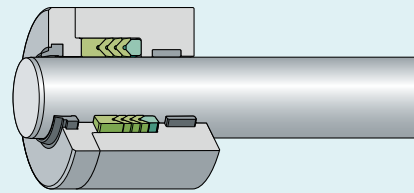

S1012-M **S1315-T**
S1012-T
S1012-T1

Main function
 Single-acting rod seals
 Chevron packings

Main applications
 Heavy duty hydraulics
 Presses

Advantages
 Suitable for old, worn rods
 Split version for easy installation
 available

Standard materials
 ECOPUR / SKF Ecotal

Rod diameter		Housing groove diameter D	Housing groove length L	Cross section c/s
d over	incl.			
mm		mm	mm	
10	40	d + 10	16	5
40	75	d + 15	25	7,5
75	150	d + 20	32	10
150	200	d + 25	40	12,5
200	300	d + 30	50	15
300		d + 40	63	20
500 ¹⁾	800	d + 45	70	13
800 ¹⁾	1000	d + 50	80	13
1000 ¹⁾	1200	d + 55	90	13
1200 ¹⁾	1540	d + 60	100	13

¹⁾ Only valid for S1012-T1 above 500 mm.

Wiper housing details and recommendations

The table on the right shows an example of standard housing measurements for wipers. Please note that SKF can produce these profiles to application specific requirements or any non-standard housing.

Suggested standard housing dimension

Indicated dimensions are required to process an order
 D housing groove diameter
 d rod diameter
 L housing groove width
 H total wiper height

Surface properties	
R_{tmax}	R_a
μm	
Sliding surface for TPU/rubber seals	
$\leq 2,5$	$\leq 0,05-0,3$
Groove bottom	
$\leq 6,3$	$\leq 1,6$
Groove face	
≤ 15	≤ 3
Bearing area T_p	
50–95% ¹⁾	
Seal housing tolerances	
D_1	H11
D ²⁾	H11
d	f8
L	+0,2

¹⁾ at a cutting depth of 0,5 R_z based on $C_{ref} = 0\%$
²⁾ A03-A and A06-A need tighter tolerances - please see details in the related section

A02-A A02-B A05-A A05-B A11-A

Main function
Single/double-acting wipers

Main applications
In combination with O-ring activated PTFE rod seals (S09)

Advantages
Excellent wear resistance
Double-acting function

Standard materials
ECOPUR (X-ECOPUR) / SKF Ecorubber.

A12-A A12-B

Rod diameter		Housing groove diameter		Housing groove width	
d over	incl.	D	D_1	L	L_1 min
mm		mm		mm	
50	50	d + 8	d + 4	5	2
50	100	d + 10	d + 5	6	2
100		d + 15	d + 7,5	8,5	2

Rod diameter		Housing groove diameter		Housing groove width	
d over	incl.	D	D_1	L	L_1 min
mm		mm		mm	
50	50	d + 8	d + 4	5	1,5
50	100	d + 10	d + 5	6	2
100	600	d + 15	d + 7,5	8,5	3

A01-A A01-B A04-A A04-B

Main function
Single-acting wipers

Main applications
Standard wiper for hydraulics

Advantages
Easy installation (snap in)
Excellent wear resistance
Technically accurate closure

Standard materials
ECOPUR (X-ECOPUR) / SKF Ecorubber

Rod diameter		Housing groove diameter		Housing groove width	
d over	incl.	D	D_1	L	L_1
mm		mm		mm	
100	100	d + 8	d + 6	4	1
100	150	d + 12	d + 9	5,5	1,5
150		d + 15	d + 11	6,5	2

A03-A A06-A

Main function
Single-acting wipers

Main applications
Standard hydraulic applications
Pressfit for axially open housings

Advantages
Excellent wear resistance
Plastic retainer ring
No oxidation issues between retainer and housing

Standard materials
ECOPUR (X-ECOPUR) + SKF Ecotal / SKF Ecorubber + SKF Ecotal

Rod diameter		Housing groove diameter		Housing groove width	
d over	incl.	D	H8	L	L
mm		mm		mm	
22	100	d + 10		7	
100	200	d + 15		9	
200		d + 20		12	

Rotary seal housing details and recommendations

The table on the right shows an example of standard housing measurements for rotary seals.

Please note that SKF can produce these profiles to application specific requirements or any non-standard housing.

Suggested standard housing dimension

Surface properties
 R_{tmax} R_a
 μm

Sliding surface for
 TPU/rubber seals $\leq 2,5$ $\leq 0,1-0,5$
 PTFE seals ≤ 2 $\leq 0,05-0,3$

Groove bottom $\leq 6,3$ $\leq 1,6$
 Groove face ≤ 15 ≤ 3

Bearing area T_p 50-95%¹⁾

Seal housing tolerances
 Depending on seal profile

Hardness
 Min 45 HRC (55 HRC recommended), Hardened depth > 0,3 mm
 Grinded free of twists

Indicated dimensions are required to process an order
 D housing groove diameter
 d shaft diameter
 L housing groove length
 c/s cross section

¹⁾ at a cutting depth of 0,5 R_z based on $C_{ref} = 0\%$
²⁾ For chamfer details please refer to the related seal data sheet
³⁾ For details regarding R_{max} please refer to the related seal data sheet

R01-P R02-P
R01-R R02-R

Main function
 Single-acting rotary seals
 Oil seals
 Radial shaft seals

Main applications
 Bearing protection

Advantages
 Easier installation and reduced costs due to open housings

Standard materials
 ECOPUR, SKF Ecorubber/SKF Ecotal, metal

Shaft diameter		Housing groove diameter D H8	Housing groove length L +0,2	Cross section c/s
d h11 over	incl.			
mm	mm	mm	mm	mm
15	60	d + 12	7	6
60	140	d + 15	8	7,5
140	300	d + 20	10	10
300	500	d + 30	12	15
500	800	d + 40	20	20
800		d + 50	22	25

¹⁾ For details regarding R_{max} please refer to the related seal data sheet

R09-F

Main function
 Double-acting rotary seal
 O-ring activated PTFE seal

Main applications
 Rotary pivots

Advantages
 For high pressure

Standard materials
 SKF Ecoflon, NBR or FKM

Shaft diameter		Housing groove diameter D H9	Housing groove length L +0,2	Cross section c/s
d f8 over	incl.			
mm	mm	mm	mm	mm
5	19	d + 4,9	2,2	2,45
19	38	d + 7,5	3,2	3,75
38	200	d + 11	4,2	5,5
200	256	d + 15,5	6,3	7,75
256	650	d + 21	8,1	10,5
650	1000	d + 28	9,5	14

R09-FS

Shaft diameter		Housing groove diameter D H9	Housing groove length L	Cross section c/s
d ¹⁾ over	incl.			
mm	mm	mm	mm	mm
5	50	d + 10	5	5
50	60	d + 15	7,5	7,5
60	200	d + 20	10	10
200	300	d + 25	12,5	12,5
300	530	d + 30	15	15
530	650	d + 35	17,5	17,5
650	1000	d + 40	20	20


R03-P R03-R

Shaft diameter		Housing groove diameter D H8	Housing groove length L +0,2	Cross section c/s
d h11 over	incl.			
mm	mm	mm	mm	mm
21 ²⁾	22 ²⁾	d + 8	6,5	4
22	36	d + 10	8	5
36	56	d + 12	8	6
56	85	d + 15	11	7,5
85	140	d + 20	13	10
140	200	d + 25	16	12,5
200	300	d + 30	19	15
300		d + 40	26	20

R04-A

Shaft diameter		Housing groove diameter D H8	Housing groove length L +0,2	Cross section c/s
d h11 over	incl.			
mm	mm	mm	mm	mm
5	22	d + 8	4,5	4
22	36	d + 10	5,6	5
36	56	d + 12	5,6	6
56	85	d + 15	7,7	7,5
85	140	d + 20	9,2	10
140	200	d + 25	11,3	12,5
200	300	d + 30	13,5	15
300		d + 40	18,5	20

¹⁾ Tolerance area shaft ≤ 56 mm $\rightarrow e8$, > 56 mm $\rightarrow f7$.
²⁾ Only valid for R03-P.
³⁾ For details regarding R_{max} please refer to the related seal data sheet

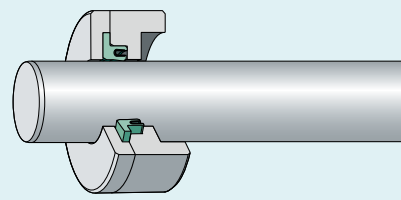

R19


Main function
Single-acting rotary seal
Spring activated PTFE seal

Main applications
Bearing protection for chemical and
pharma industries



Advantages
Low friction
Good chemical and thermal resistance
Suitable for high speed

Standard materials
SKF Ecoflon, stainless steel spring

Shaft diameter		Housing groove diameter		Housing groove length		
d	f8 over	incl.	D H10	D ₁ H9	L +0,2	L ₁ ¹⁾
mm		mm		mm		
5	20	d + 9	d + 5	3,6	0,85	
20	40	d + 12,5	d + 7	4,8	1,35	
40	400	d + 17,5	d + 10,5	7,1	1,8	
400		d + 22	d + 14	9,5	2,8	



¹⁾ Please refer to the seal data sheet for the tolerance details of L₁.

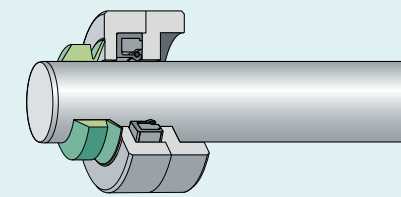

R06-P R07-P
R06-R R07-R


Main function
Axially acting rotary seal
Rotates with the shaft
Sealing axially

Main applications
Bearing protection for heavy industrial
applications

Advantages
Excellent wear resistance
Interference fit on the shaft
Adaption for diverse temperatures
and media

Standard materials
ECOPUR, SKF Ecorubber

Shaft diameter		Housing groove diameter		Housing groove length		c/s
d	h11 over	incl.	D ₁ max	D ₂ min	L	
mm		mm		mm		
5	40	d + 2	d + 12	6 (8,5) ¹⁾	4	
40	70	d + 2,5	d + 15	7 (10) ¹⁾	5	
70	100	d + 3	d + 18	9 (12,5) ¹⁾	6	
100	150	d + 3,5	d + 21	10,5 (14,5) ¹⁾	7	
150	210	d + 4	d + 24	12 (16,5) ¹⁾	8	
210	300	d + 5	d + 30	14,5 (20,5) ¹⁾	10	
300	450	d + 6,25	d + 36,5	17,5 (24,5) ¹⁾	12,5	
450	-	d + 7,5	d + 45	20 (28,5) ¹⁾	15	

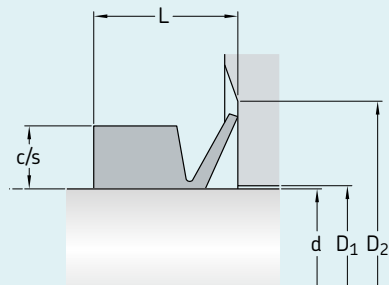

¹⁾ Higher values in brackets valid for R07-P and R07-R.



Guide ring housing details and recommendations

Guide ring housing details and recommendations for dynamic applications. SKF standard guide rings are available as 45° split versions. They can also be ordered as endless, 90° split versions or yard ware.

Seal housing tolerances

D H9
d f8
L +0,2

O-ring housing details and recommendations


Housing tolerances

f7 / H8

Bearing area


50–95% at a cutting depth of 0,5 R_z
based on C_{ref} = 0%

Surface	Surface roughness				Dynamic applications	
	Pressure constant R _{tmax}	R _a	pulsating R _{tmax}	R _a	R _{tmax}	R _a
–	μm		μm		μm	
Sliding surface	6,3	1,6	3,2	0,8	1,6	0,4
Bottom of groove	12,5	3,2	6,3	1,6	6,3	1,6
Groove face	12,5	3,2	12,5	3,2	12,5	3,2

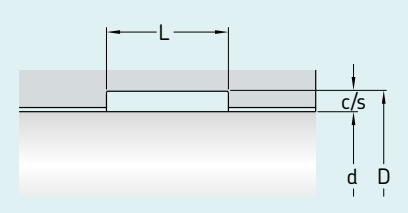

F01
Main function
Rod guide rings


Rod diameter		Housing groove diameter D	Housing groove length L	Cross section c/s
d over	incl.			
mm		mm	mm	mm
6	30	d + 3	4	1,5
30	50	d + 3	5,6	1,5
50	100	d + 5	9,7	2,5
100	800	d + 5	15	2,5
800	1 000	d + 8	25	4
1 000		d + 8	25	4

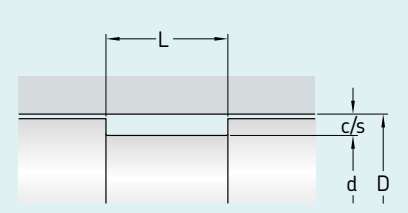

F01
Main function
Piston guide rings

Bore diameter		Housing groove diameter d	Housing groove length L	Cross section c/s
D over	incl.			
mm		mm	mm	mm
6	30	D - 3	4	1,5
30	50	D - 3	5,6	1,5
50	100	D - 5	9,7	2,5
100	800	D - 5	15	2,5
800	1 000	D - 8	25	4
1 000		D - 8	25	4

O-ring housing recommendations for static applications

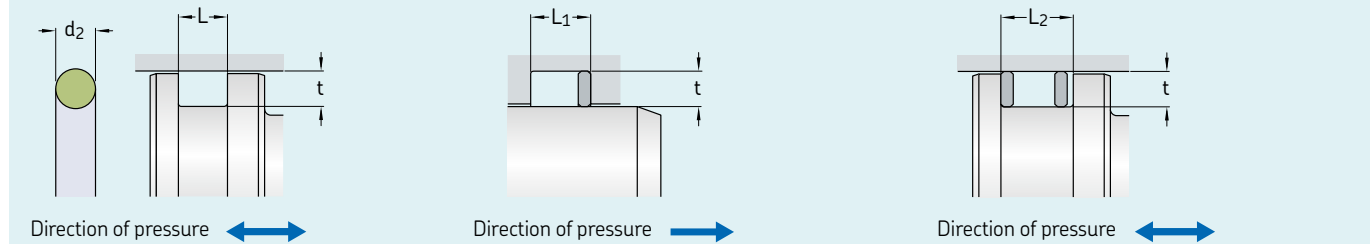

Cord	Groove	Without back-up ring	One back-up ring	Two back-up rings	Recommended back-up ring width
d ₂	t + 0,05	L + 0,25	L ₁ + 0,25	L ₂ + 0,25	
mm	mm	mm	mm	mm	mm
1,5	1,10	2,1	3,1	4,1	1,0
1,78	1,35	2,5	3,5	4,5	1,0
2,00	1,56	2,7	4,2	5,7	1,5
2,50	2,05	3,3	4,8	6,3	1,5
2,62	2,18	3,5	5,0	6,5	1,5
3,00	2,52	3,9	5,4	6,9	1,5
3,50	3,00	4,4	5,9	7,4	1,5
3,53	3,00	4,4	5,9	7,4	1,5
4,00	3,40	5,0	6,7	8,4	1,7
5,00	4,25	6,3	8,0	9,7	1,7
5,33	4,53	6,7	8,4	10,1	1,7
5,70	4,85	7,1	9,1	11,1	2,0
6,00	5,10	7,5	9,5	11,5	2,0
6,99	5,94	8,8	10,8	12,8	2,0
7,00	5,95	8,8	10,8	12,8	2,0
8,00	6,80	10,0	12,5	15,0	2,5
10,00	8,50	12,5	15,0	17,5	2,5



skf.com/seals

© SKF, ECOPUR, G-ECOPUR, H-ECOPUR, S-ECOPUR, T-ECOPUR, X-ECOPUR and SEALJET are registered trademarks of the SKF Group.

© SKF Group 2020

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB SE/P2 15235/1 EN · June 2020

Certain image(s) used under license from Shutterstock.com